



BRONZE MODEL - ONLY ATM

Version 01 | 2021


Content

What is a ATM	03
Drawings	04 - 44
Marketing elements and signage	45
Design Guidelines for Shop - in - Shop ATM Installation	47
Covid - 19 Guidelines	54

What is Vakrangee ATM

Minimum carpet area for a Vakrangee ATM : Minimum 40 sq.ft

Minimum components : ATM

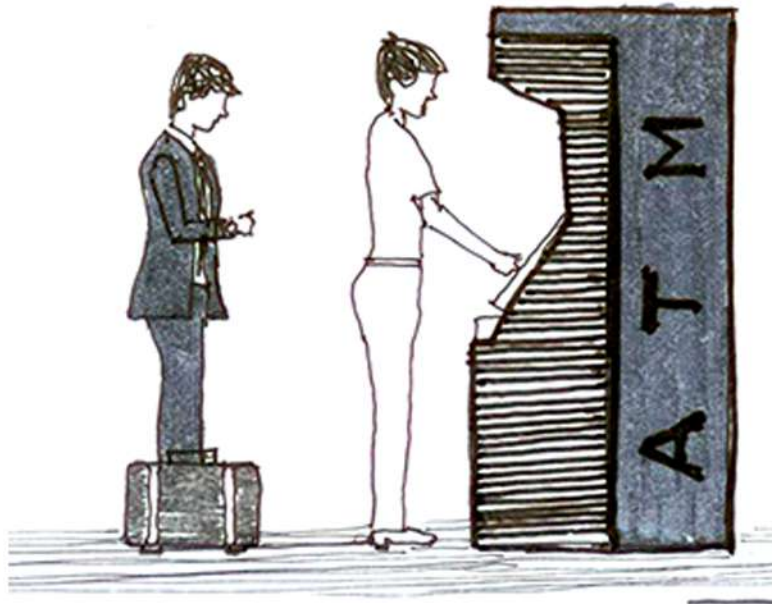

ATM

- Cash withdrawal
- Balance enquiry, Pin change, Mini statement.
- Value added services -Aadhar seeding, statement request, card to card funds transfer, cheque book request, mobile banking registration

drawings

03

Format Rectangular Horizontal

drawings

03.1

List of content



- General arrangement plan


- Top View and Isometric View
- Front Elevations

- Interior Lineout
- Flooring layout

- Wall finishes layout
- RCP & Elec. power layout

- Signage layout
- Internal elevations

Drawings | Rectangular horizontal format - General arrangement plan

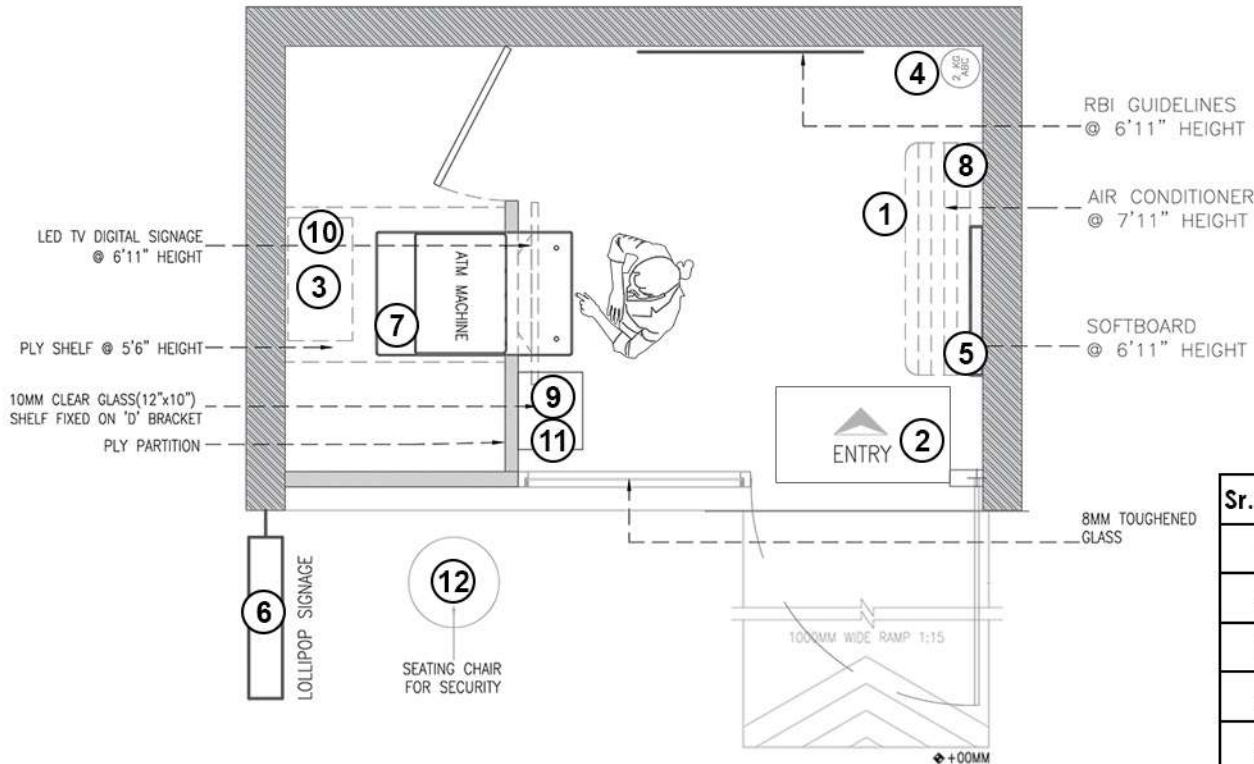


FURNITURE & EQUIPMENTS PLACEMENT (To be done by Franchisee)


Sr.No.	Items	Qty.
1	Air Conditioner	Minimum 0.5 Ton
2	Doormat	1
3	UPS (minimum 1KVA)	1
4	Fire Extinguisher	1
5	Soft Board	1
6	ATM Lollipop Signage	1
7	Digital Multimeter (For checking earthing value)	1
8	Franchisee Certificate Frame	1
9	Sanitizing Station	As per requirment
10	Earthing Point	0V to 3V
11	Cash Counting Machine	1
12	Chair or Stool for Security Person	1

Renders | Rectangular horizontal format - Top View and Isometric View

Top View

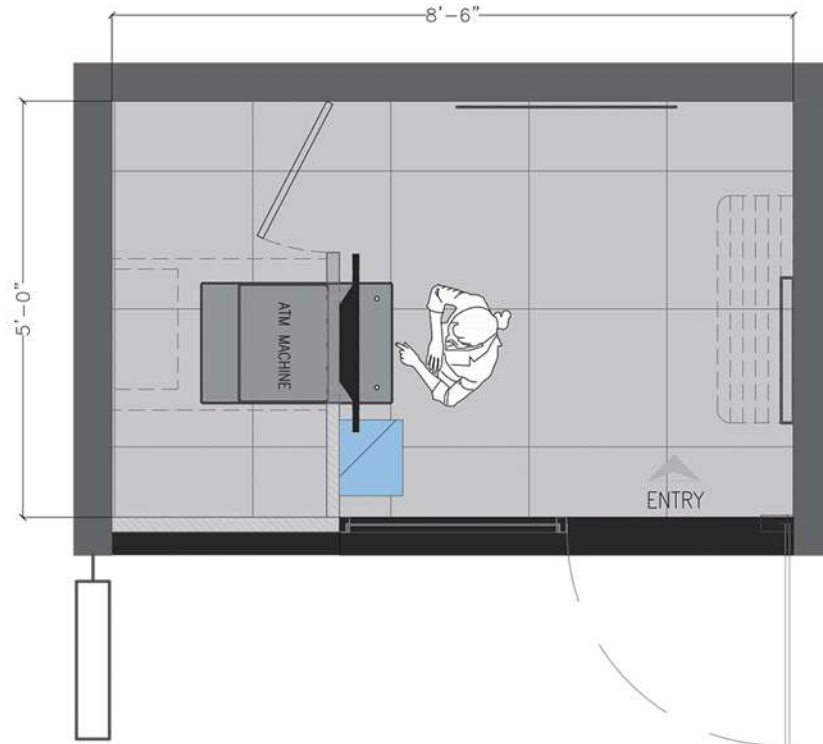


Isometric View

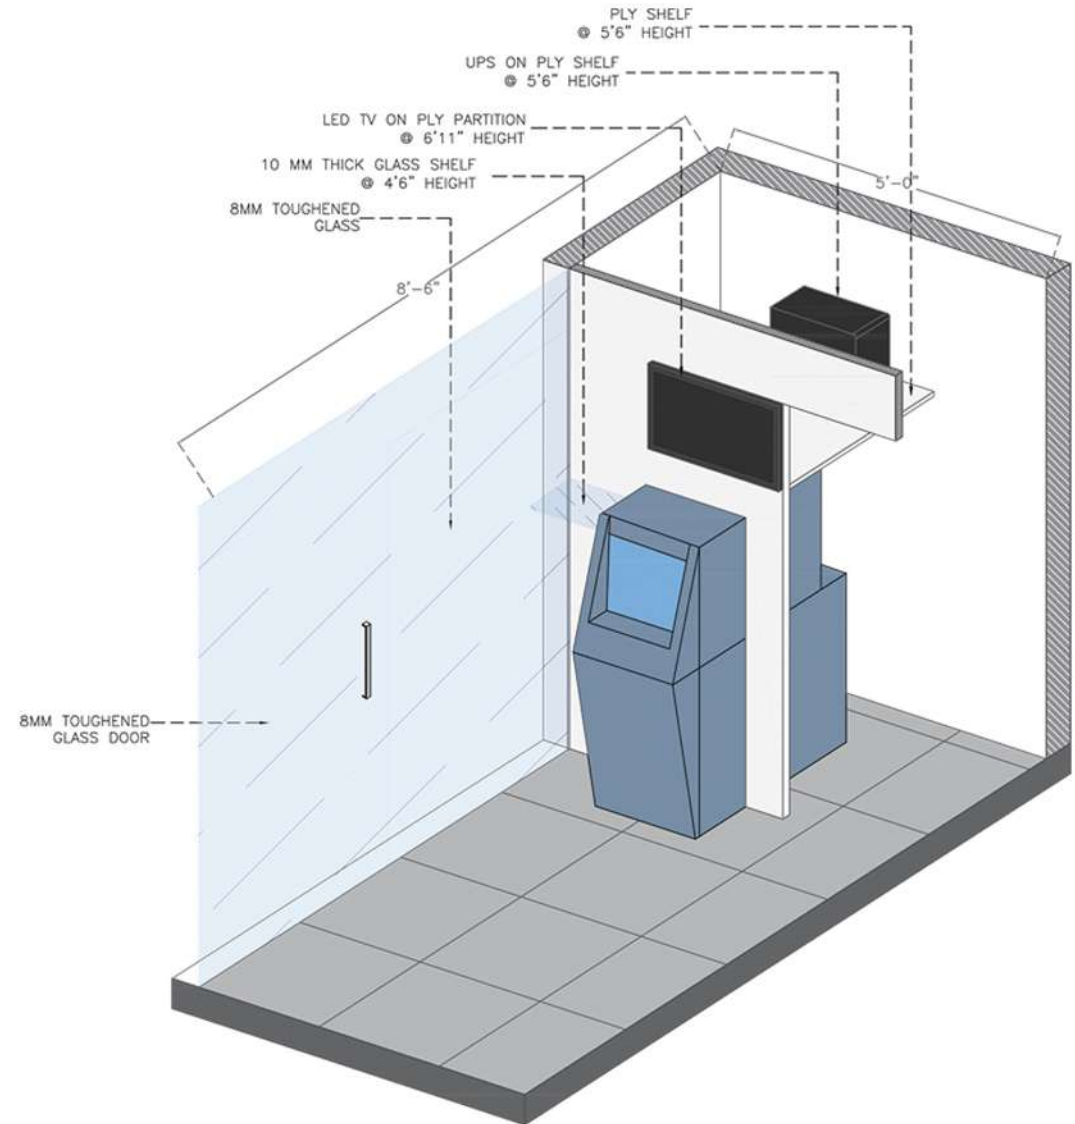



Drawings | Rectangular horizontal format - Interior Lineout

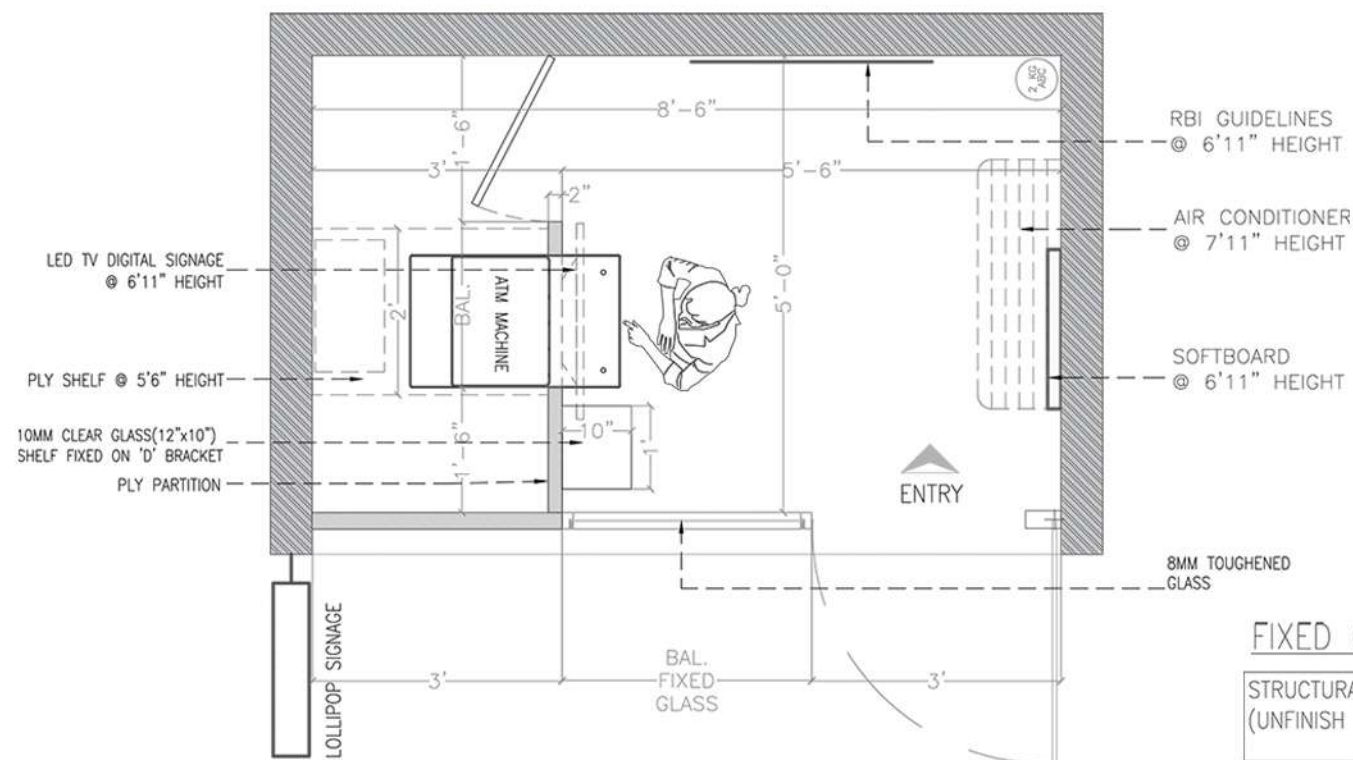

FIXED GLAZING SPECIFICATIONS


STRUCTURAL OPENING (UNFINISH TO UNFINISH)	SILL FROM FFL (IN MM)	LINTEL FROM FFL (IN MM)	WIDTH (IN MM)	HEIGHT (IN MM)	NOS.
WFGL 01	00	2150	AS PER SITE	AS PER SITE	1
WFGL 02	00	2150			1





DOOR SPECIFICATIONS

STRUCTURAL OPENING (UNFINISH TO UNFINISH)	WIDTH (IN MM)	HEIGHT (IN MM)
SERVICE AREA		
D1.01.01	900	2150


- DOOR HT. IS GIVEN CONSIDERING 50MM SCREED AND FLOOR TILE.
- ALL DOOR FINISHED HEIGHT TO BE 2100MM

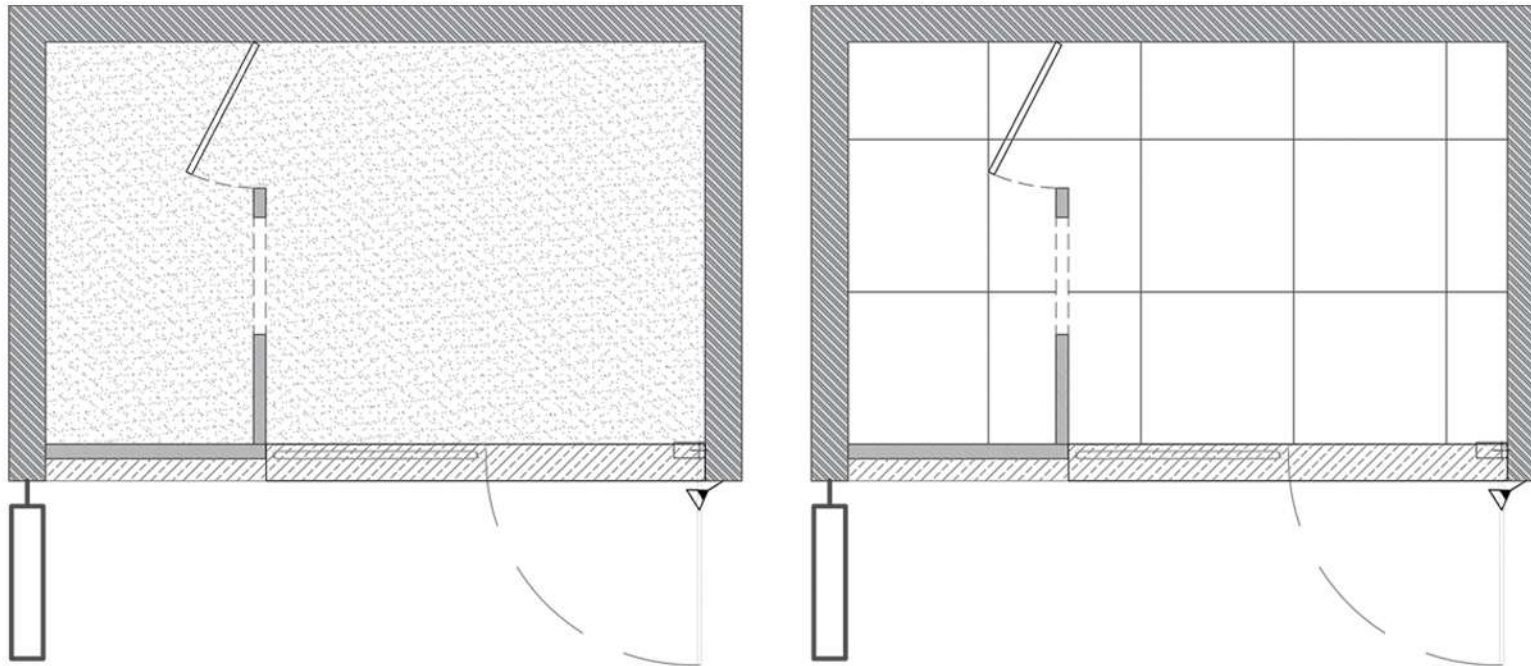

Drawings | Rectangular horizontal format - Flooring layout




LEGEND		
SYMBOL	SPECIFICATION	MAKE
	F01 ESCARA LIGHT GREY (600X600)	SOMANY CERAMICS
	F02 VINYL FLOORING-- ROLL FORM GENTLY GREY (K822-001)	ARMSTORNG
	GN1 GRANITE	
	SK-01 75MM HIGH SKIRTING SAME AS FLOOR TILES (FOR VINYL FLOORING AND TILES FLOORING)	

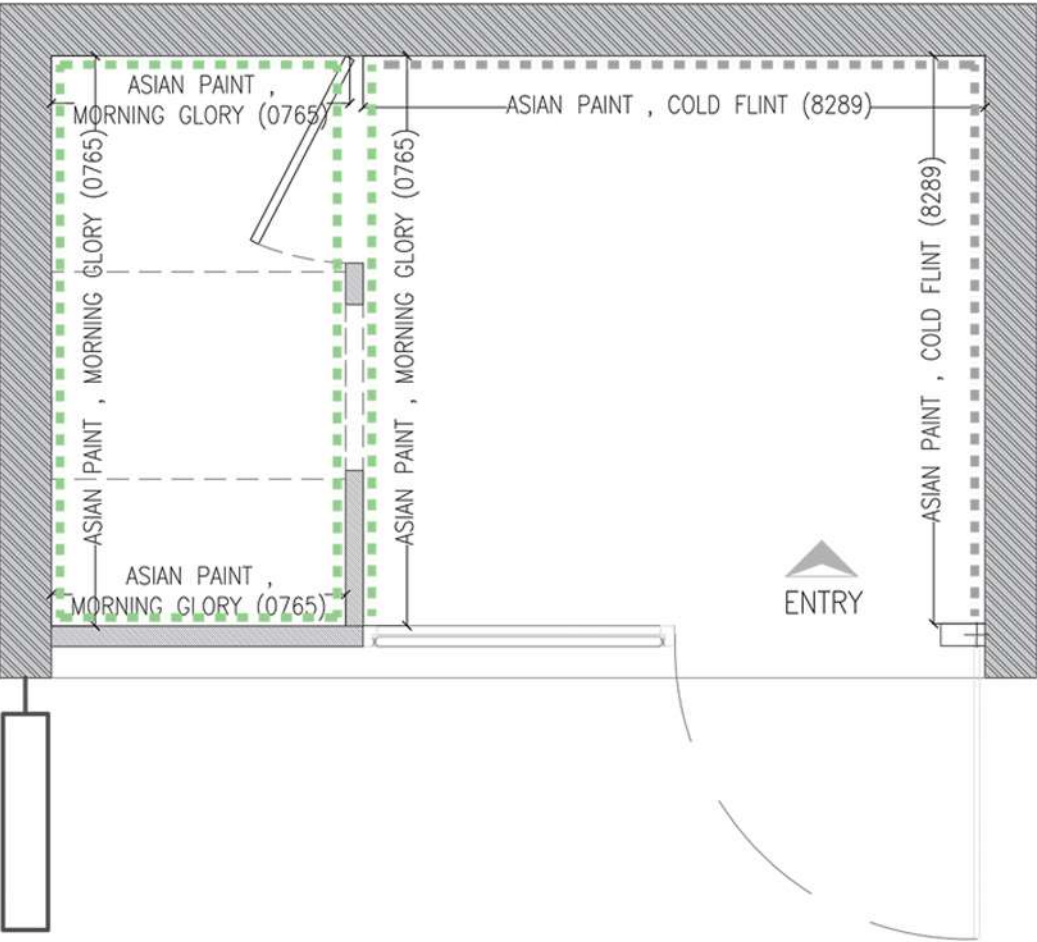Drawings | Rectangular horizontal format - Wall finishes layout




LEGEND OF FINISHES			
SR.NO	FINISHES CODE	DESCRIPTION	
PAINT			
1	PT-01 ■ ■ ■ ■ ■	ASIAN PAINT , MORNING GLORY (0765).	
2	PT-02 ■ ■ ■ ■ ■	ASIAN PAINT , COLD FLINT (8289).	

Drawings | Rectangular horizontal format - RCP & Elec. power layout and CCTV Camera installation

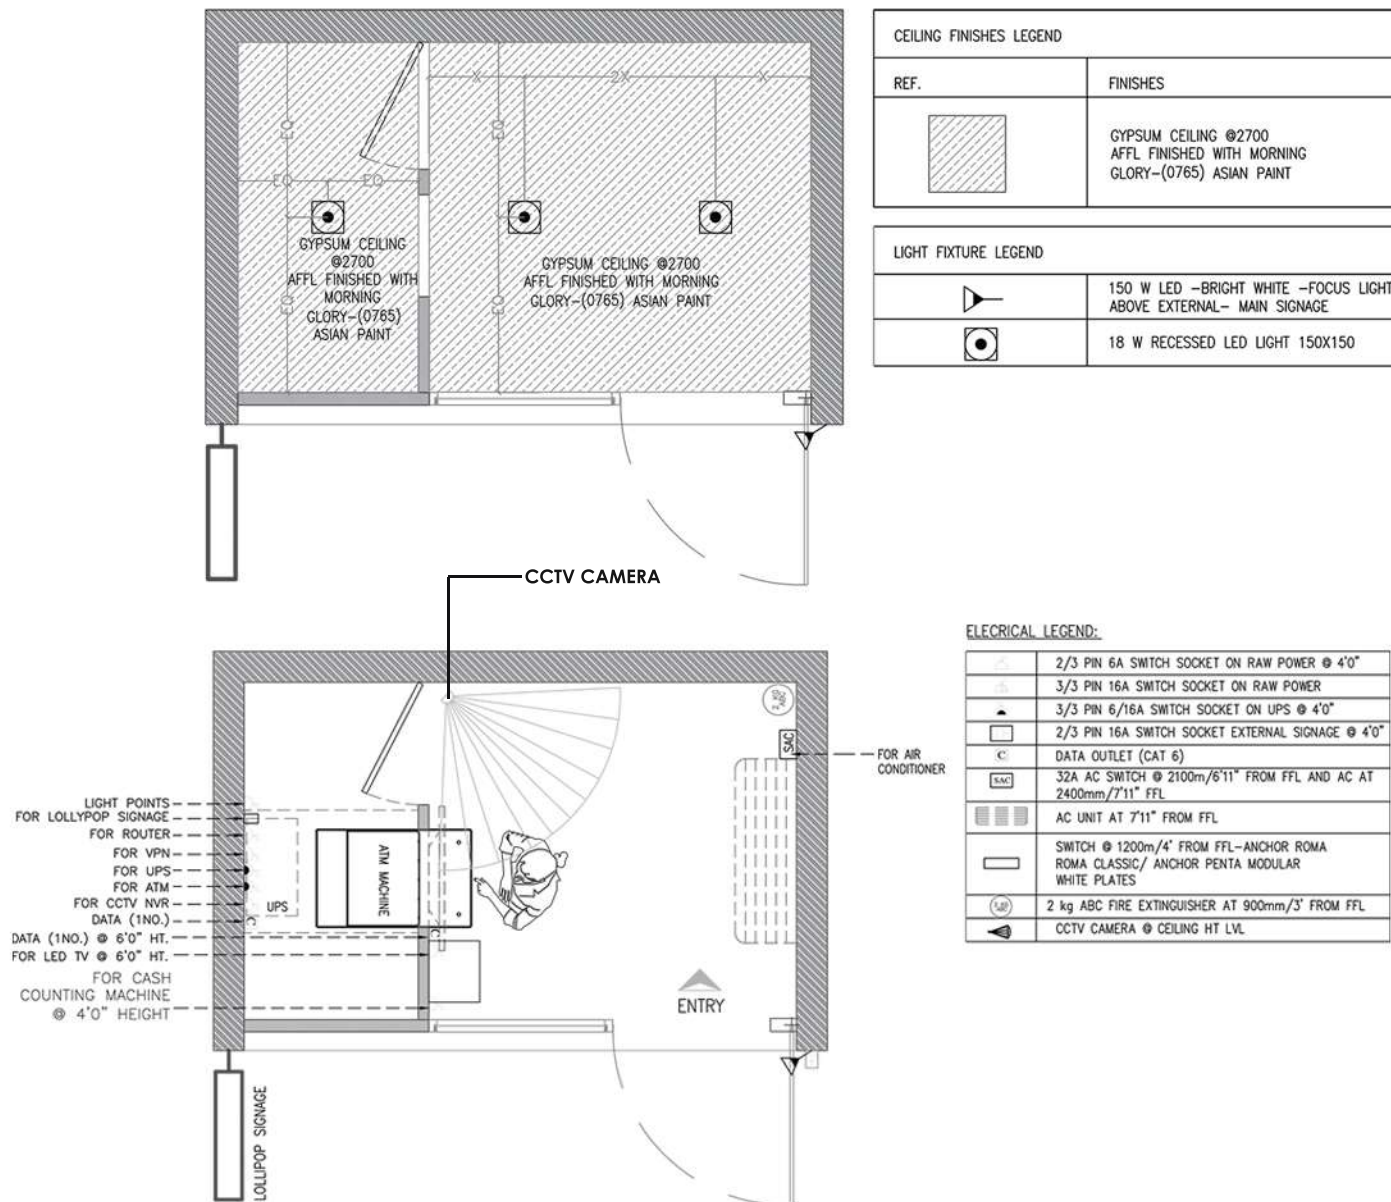


Drawings | Rectangular horizontal format - Signage layout

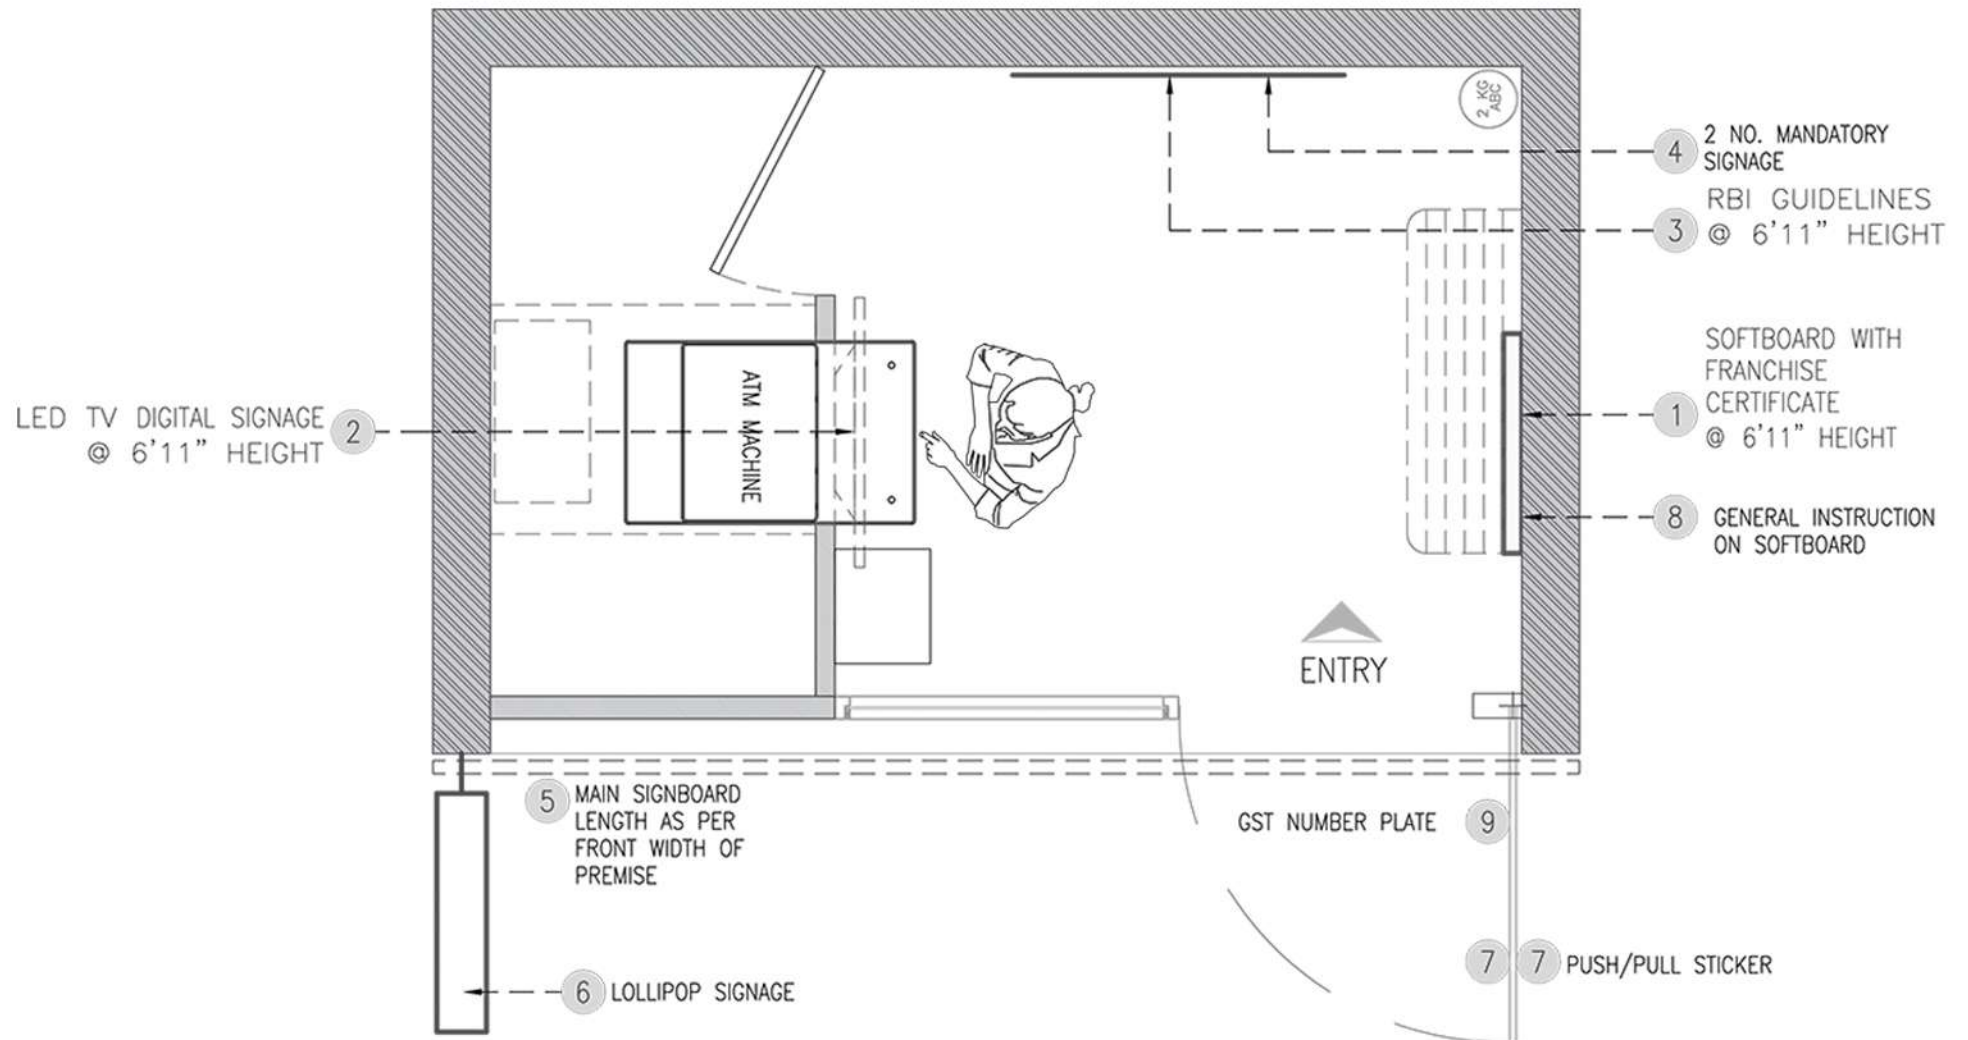


Note - Refer page number 46 for more details


Drawings | Rectangular horizontal format - Internal elevations

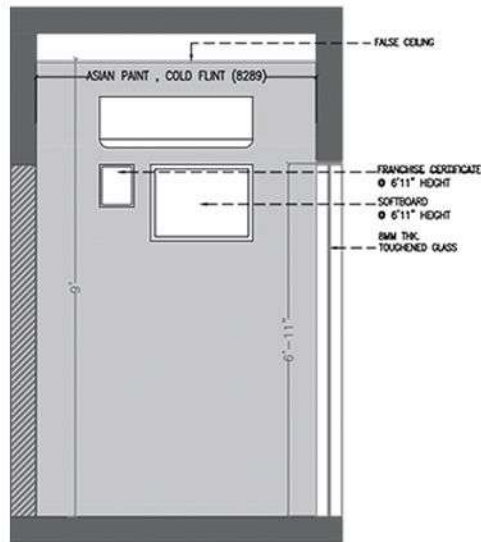


02
 XIE-0101 1:50 INTERNAL ELEVATION - 02

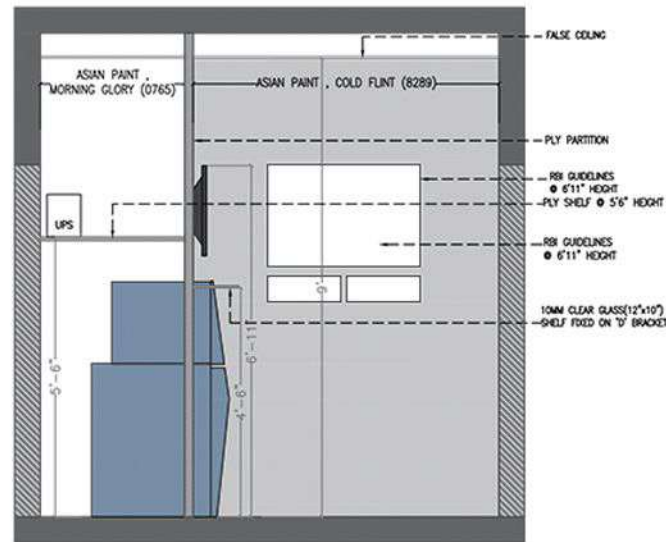


03
 XIE-0101 1:50 INTERNAL ELEVATION - 03

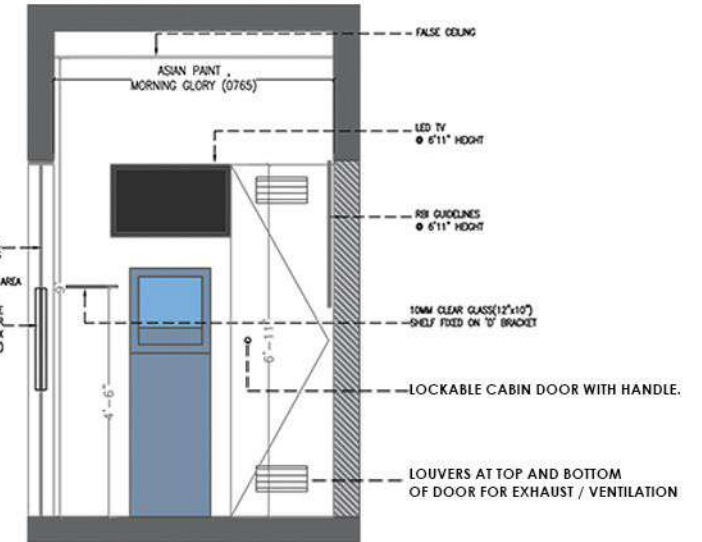

04
 XIE-0101 1:50 INTERNAL ELEVATION - 04

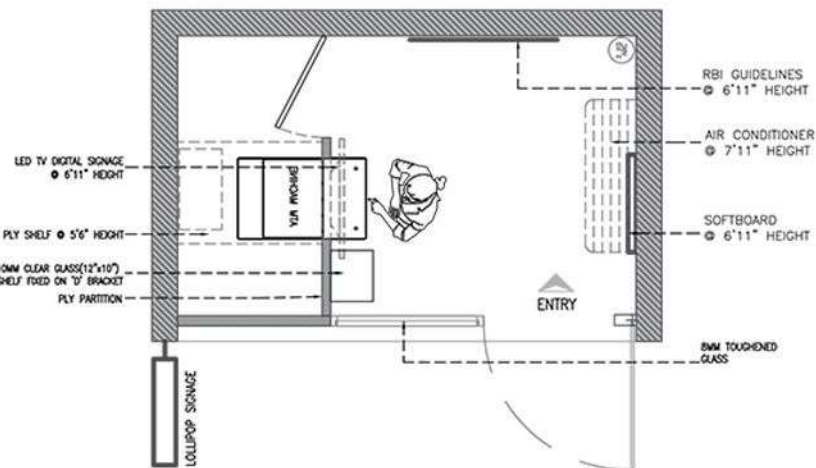

01
 XIE-0101 1:20 GENERAL ARRANGEMENT PLAN

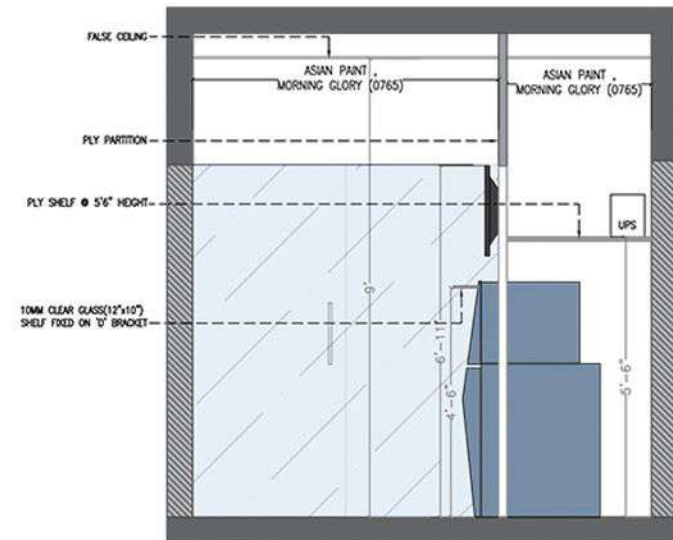

05
 XIE-0101 1:50 INTERNAL ELEVATION - 05

Vertical

Format Rectangular

drawings

03.2

List of content



- General arrangement plan


- Top View
- Front Elveion

- Interior Lineout
- Flooring layout


- Wall finishes layout
- RCP & Elec. power layout


- Signage layout
- Internal elevations


Top View

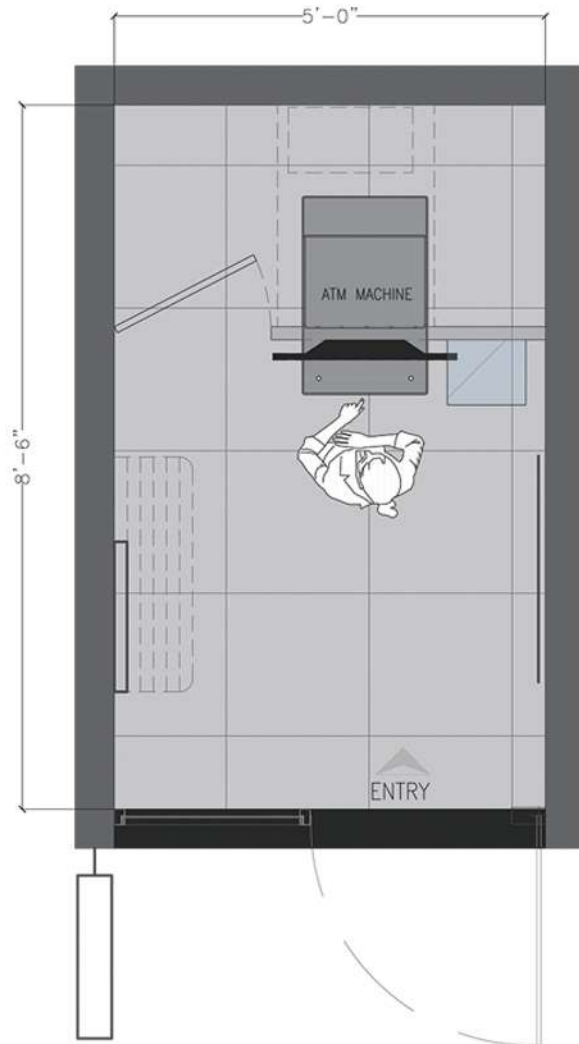

Isometric View

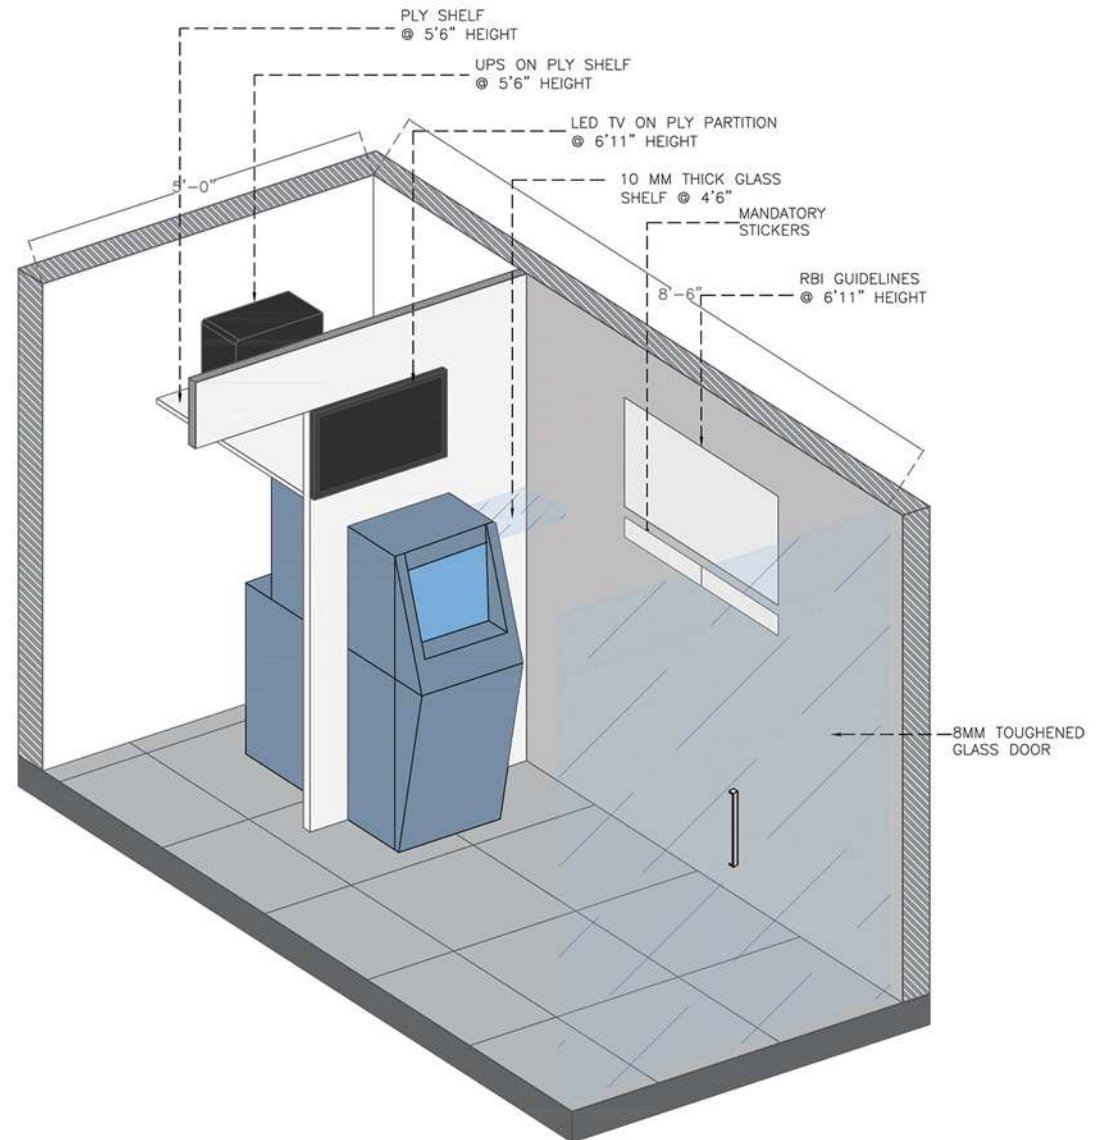

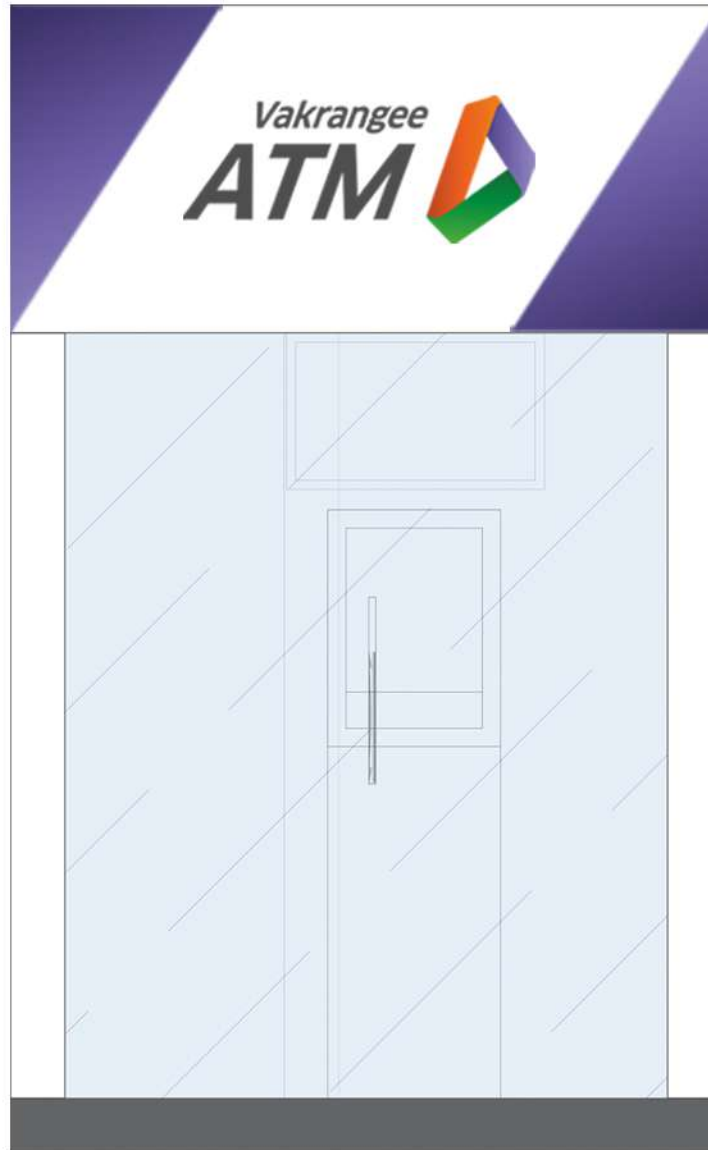

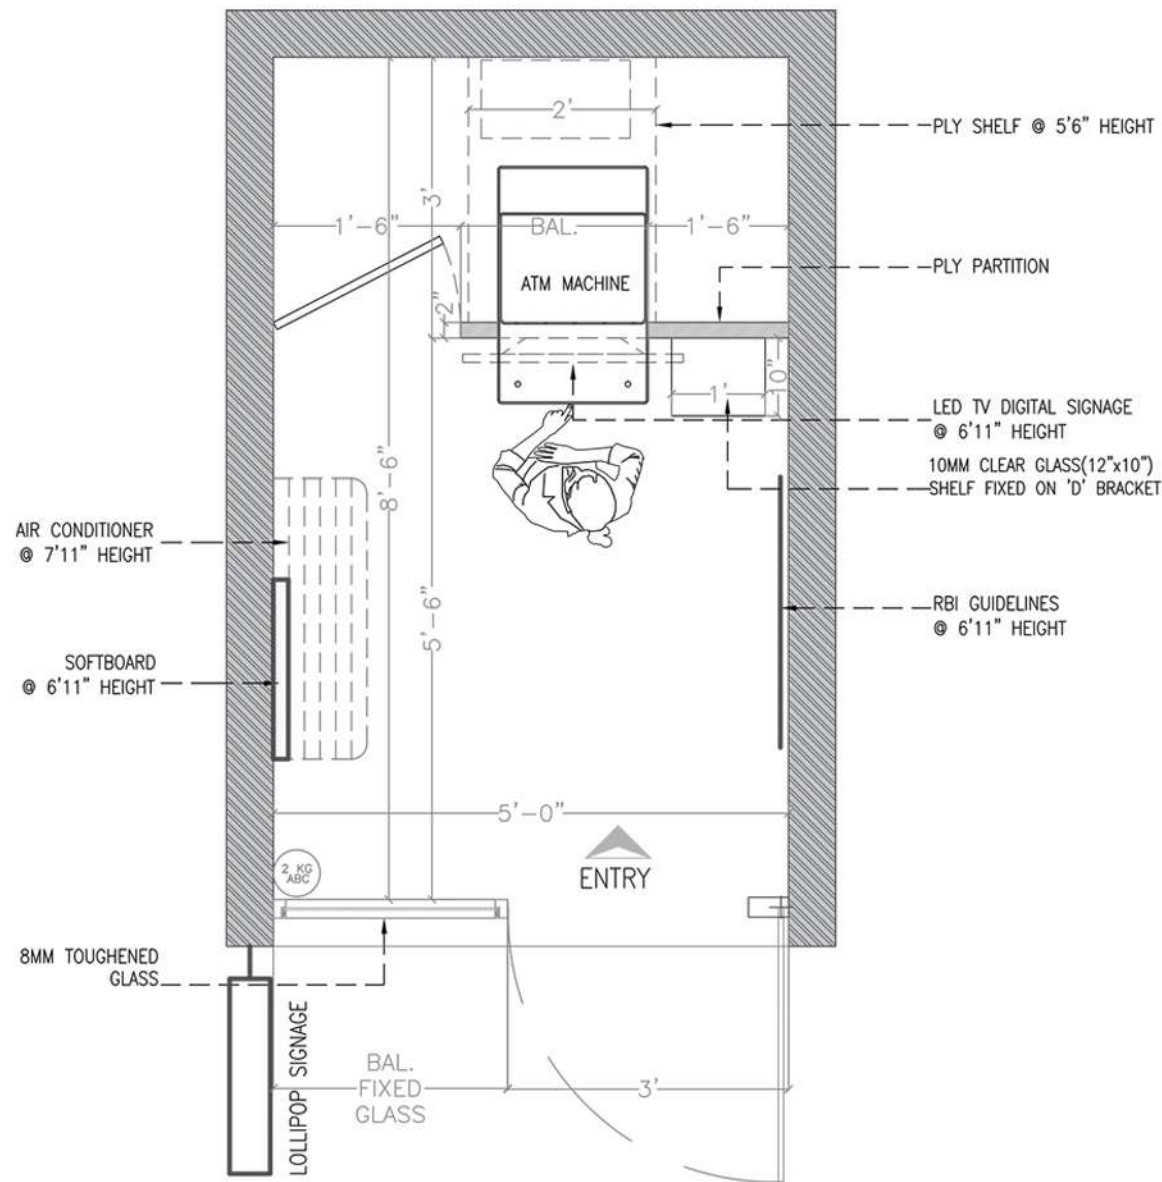

FIXED GLAZING SPECIFICATIONS


STRUCTURAL OPENING (UNFINISH TO UNFINISH)	SILL FROM FFL (IN MM)	LINTEL FROM FFL (IN MM)	WIDTH (IN MM)	HEIGHT (IN MM)	NOS.
WFGL 01	00	2150	AS PER SITE	AS PER SITE	1





DOOR SPECIFICATIONS

STRUCTURAL OPENING (UNFINISH TO UNFINISH)	WIDTH (IN MM)	HEIGHT (IN MM)
SERVICE AREA		
D1.01.01	900	2150

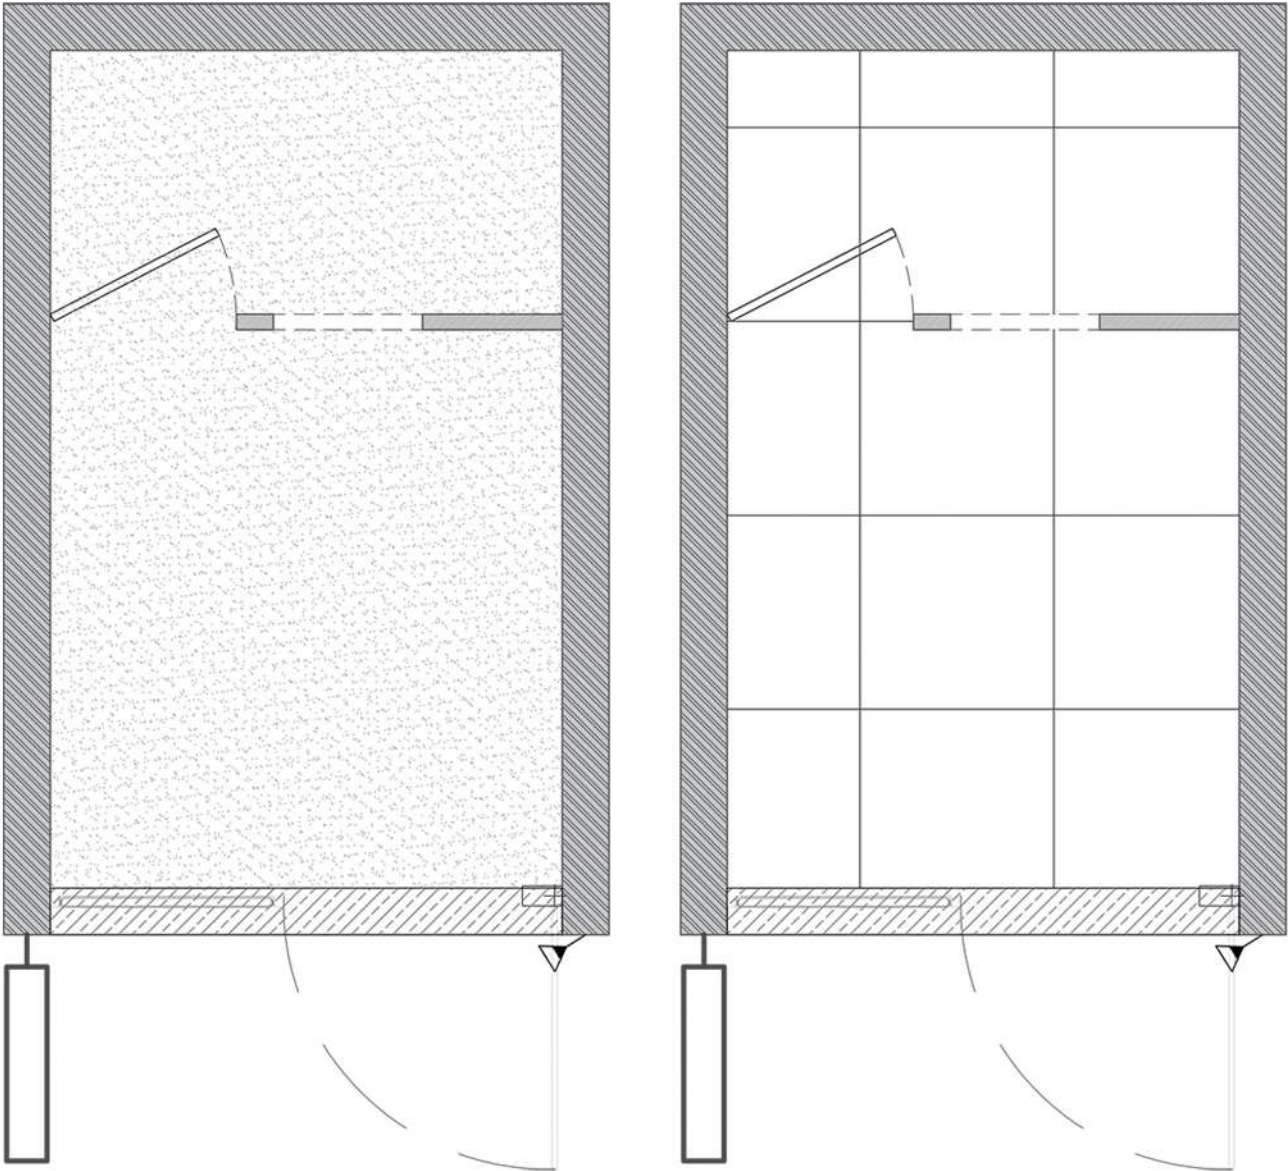
- DOOR HT. IS GIVEN CONSIDERING 50MM SCREED AND FLOOR TILE.
- ALL DOOR FINISHED HEIGHT TO BE 2100MM



Drawings | Rectangular vertical format - Flooring layout





LEGEND		
SYMBOL	SPECIFICATION	MAKE
	F01 ESCARA LIGHT GREY (600X600)	SOMANY CERAMICS
	F02 VINYL FLOORING- ROLL FORM GENTLY GREY (K822-001)	ARMSTORNG
	GN1 GRANITE	
	SK-01 75MM HIGH SKIRTING SAME AS FLOOR TILES (FOR VINYL FLOORING AND TILES FLOORING)	

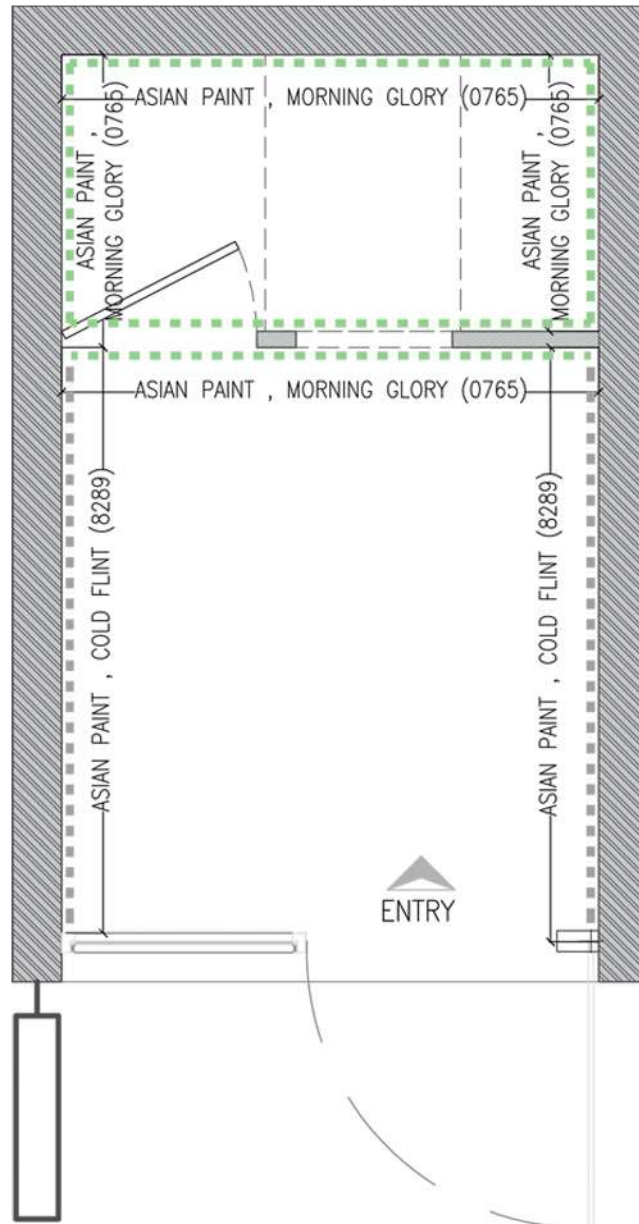

Drawings



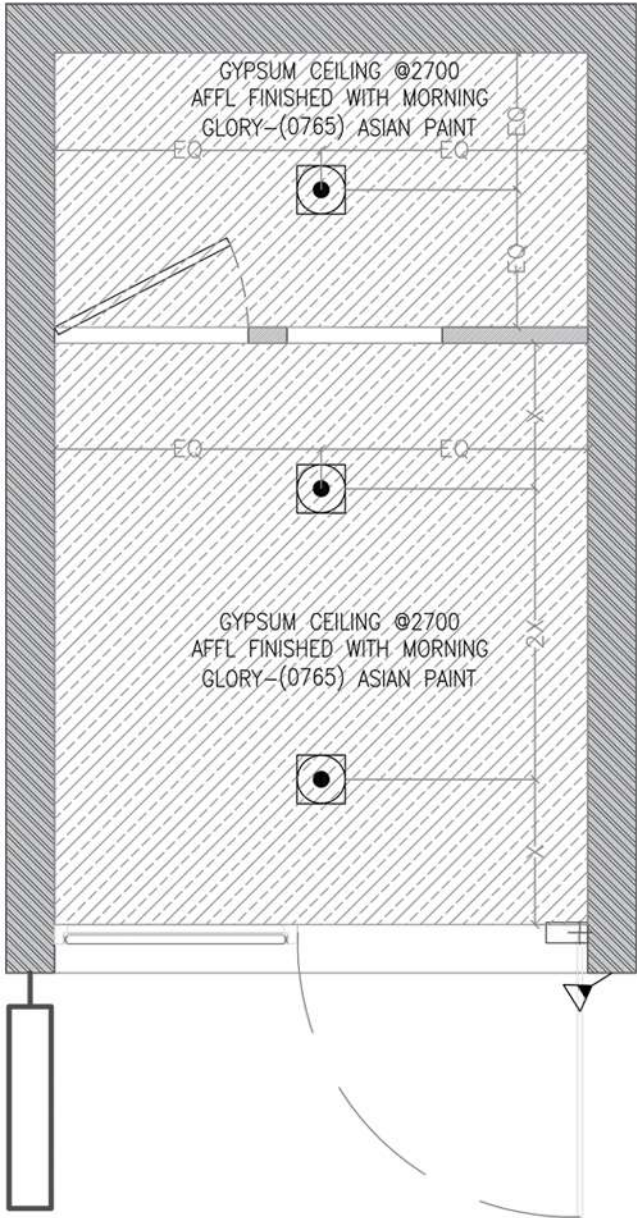
LEGEND OF FINISHES			
SR.NO	FINISHES CODE	DESCRIPTION	
PAINT			
1	PT-01 ■■■■■	ASIAN PAINT , MORNING GLORY (0765).	
2	PT-02 ■■■■■	ASIAN PAINT , COLD FLINT (8289).	



CEILING FINISHES LEGEND	
REF.	FINISHES
	GYPSUM CEILING @2700 AFFL FINISHED WITH MORNING GLORY-(0765) ASIAN PAINT

LIGHT FIXTURE LEGEND	
	150 W LED -BRIGHT WHITE -FOCUS LIGHT ABOVE EXTERNAL- MAIN SIGNAGE
	18 W RECESSED LED LIGHT 150X150


Drawings | Rectangular vertical format - RCP & Elec. power layout **CCTV Camera installation 2/2**

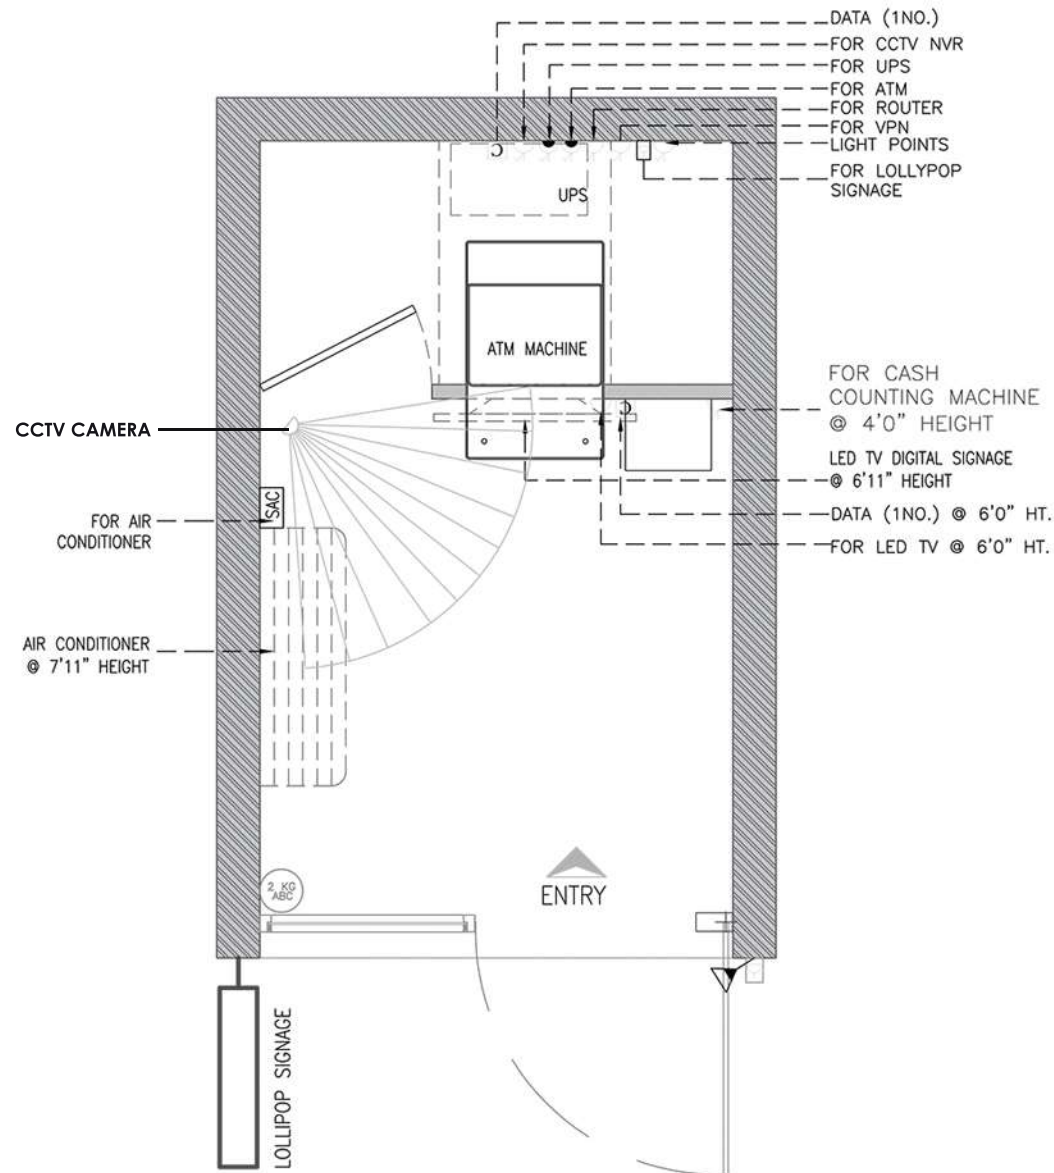

ELECTRICAL LEGEND:


	2/3 PIN 6A SWITCH SOCKET ON RAW POWER @ 4'0"
	3/3 PIN 16A SWITCH SOCKET ON RAW POWER
	3/3 PIN 6/16A SWITCH SOCKET ON UPS @ 4'0"
	2/3 PIN 16A SWITCH SOCKET EXTERNAL SIGNAGE @ 4'0"
	DATA OUTLET (CAT 6)
	32A AC SWITCH @ 2100m/6'11" FROM FFL AND AC AT 2400mm/7'11" FFL
	AC UNIT AT 7'11" FROM FFL
	SWITCH @ 1200m/4' FROM FFL-ANCHOR ROMA ROMA CLASSIC/ ANCHOR PENTA MODULAR WHITE PLATES
	2 kg ABC FIRE EXTINGUISHER AT 900mm/3' FROM FFL
	CCTV CAMERA @ CEILING HT LVL

Drawings | Rectangular vertical format - Signage layout

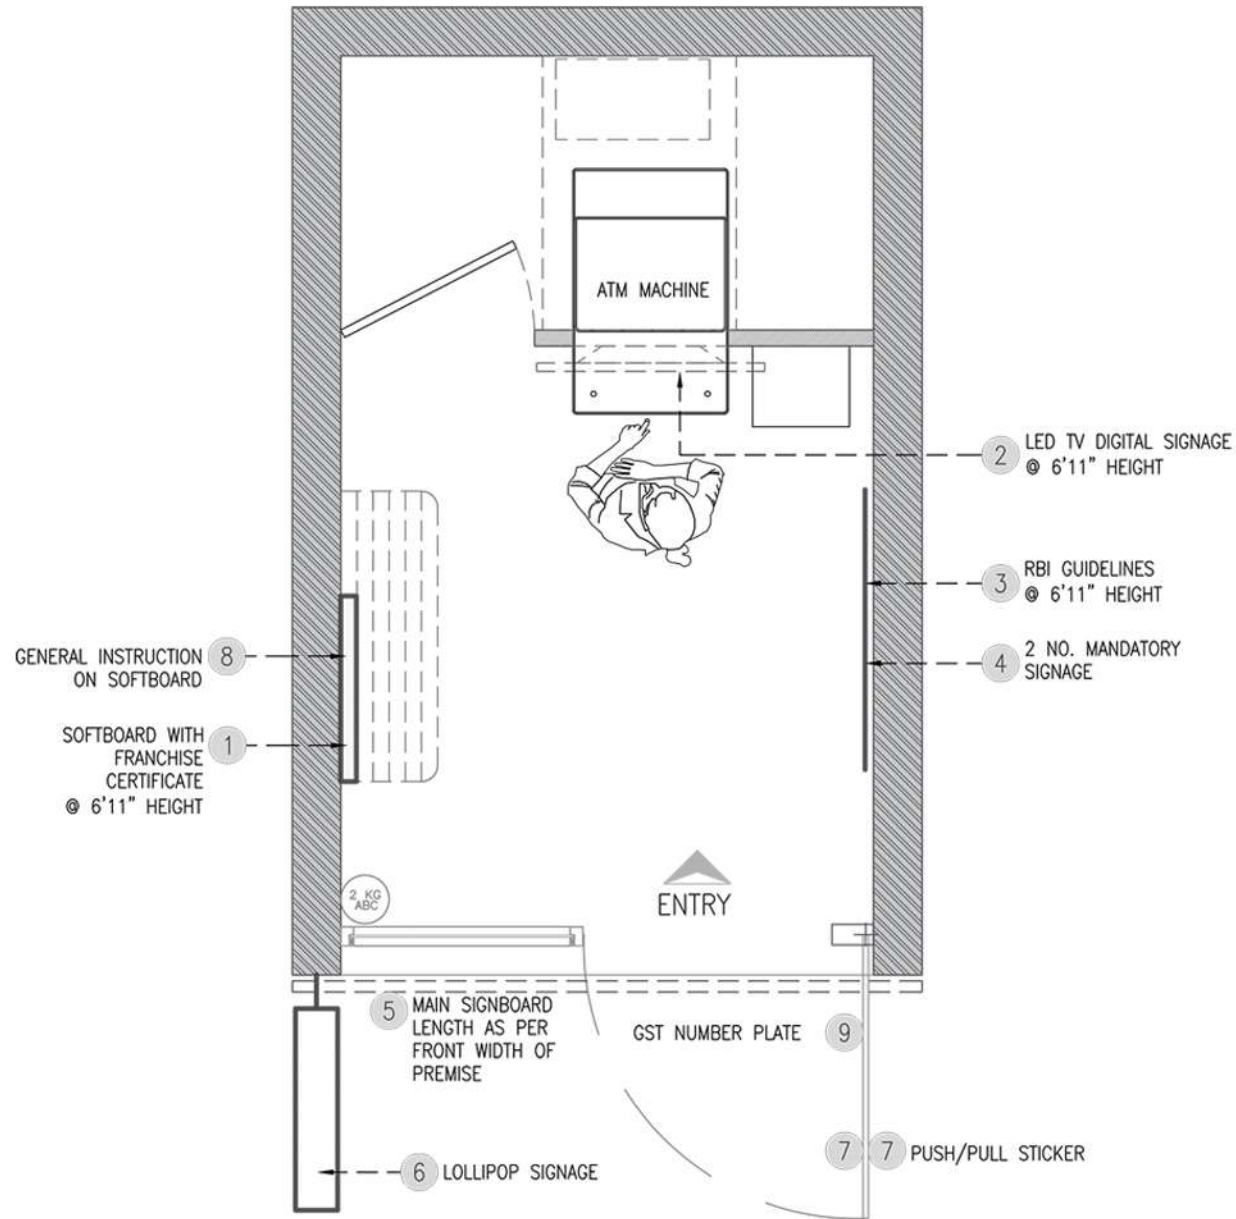


Note - Refer page number 46 for more details


Drawings | Rectangular vertical format - Internal elevations

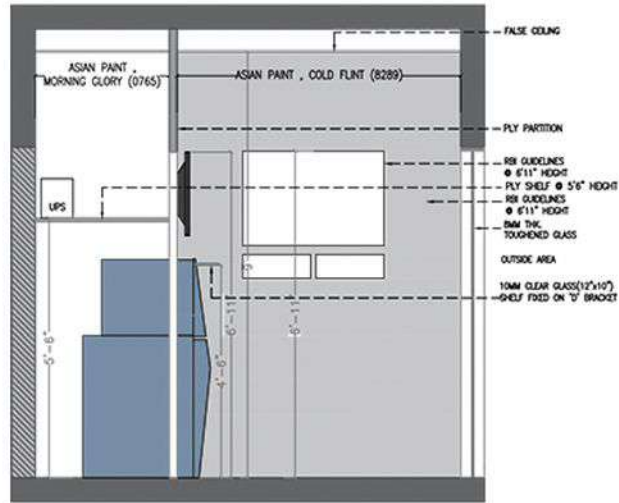


02
XIE-0101 1:50 INTERNAL ELEVATION - 02
GROUND FLOOR

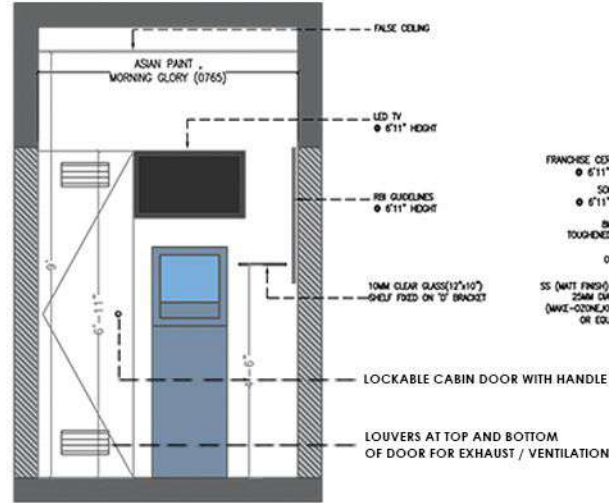


03
XIE-0101 1:50 INTERNAL ELEVATION - 03
GROUND FLOOR

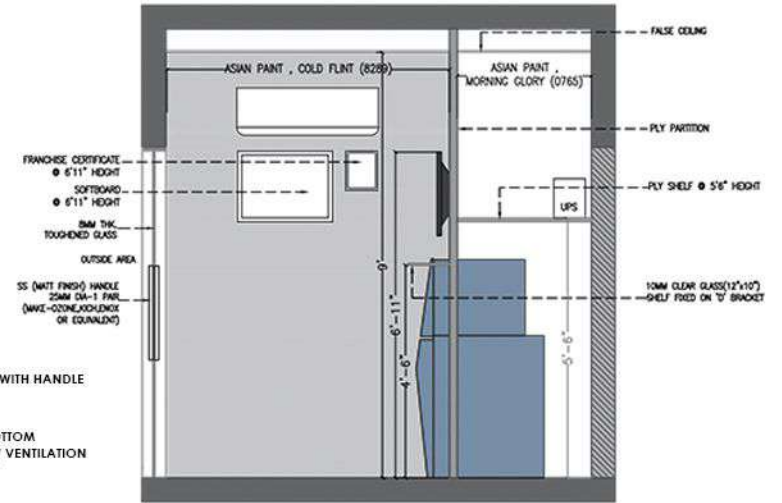

04
XIE-0101 1:50 INTERNAL ELEVATION - 04
GROUND FLOOR

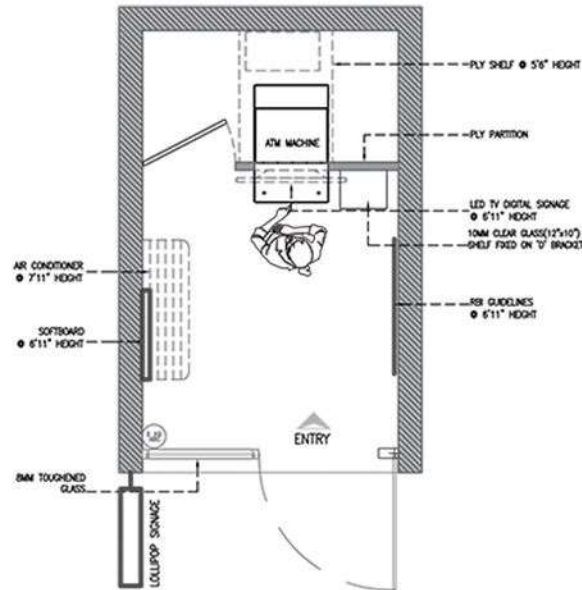

01
XIE-0101 1:20 GENERAL ARRANGEMENT PLAN
GROUND FLOOR

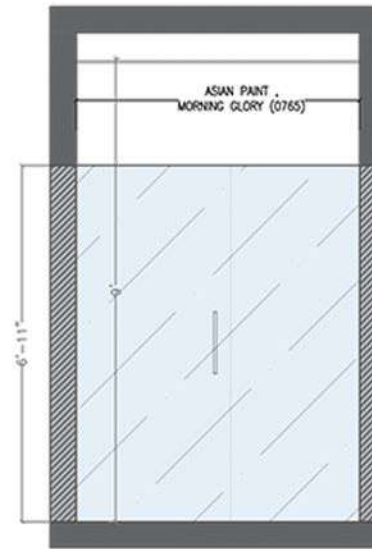

05
XIE-0101 1:50 INTERNAL ELEVATION - 05
GROUND FLOOR

Format Square

drawings

03.3

List of content



- General arrangement plan


- Top View
- Front Elveion

- Interior Lineout
- Flooring layout

- Wall finishes layout
- RCP & Elec. power layout

- Signage layout
- Internal elevations


Drawings | Square format - General arrangement plan

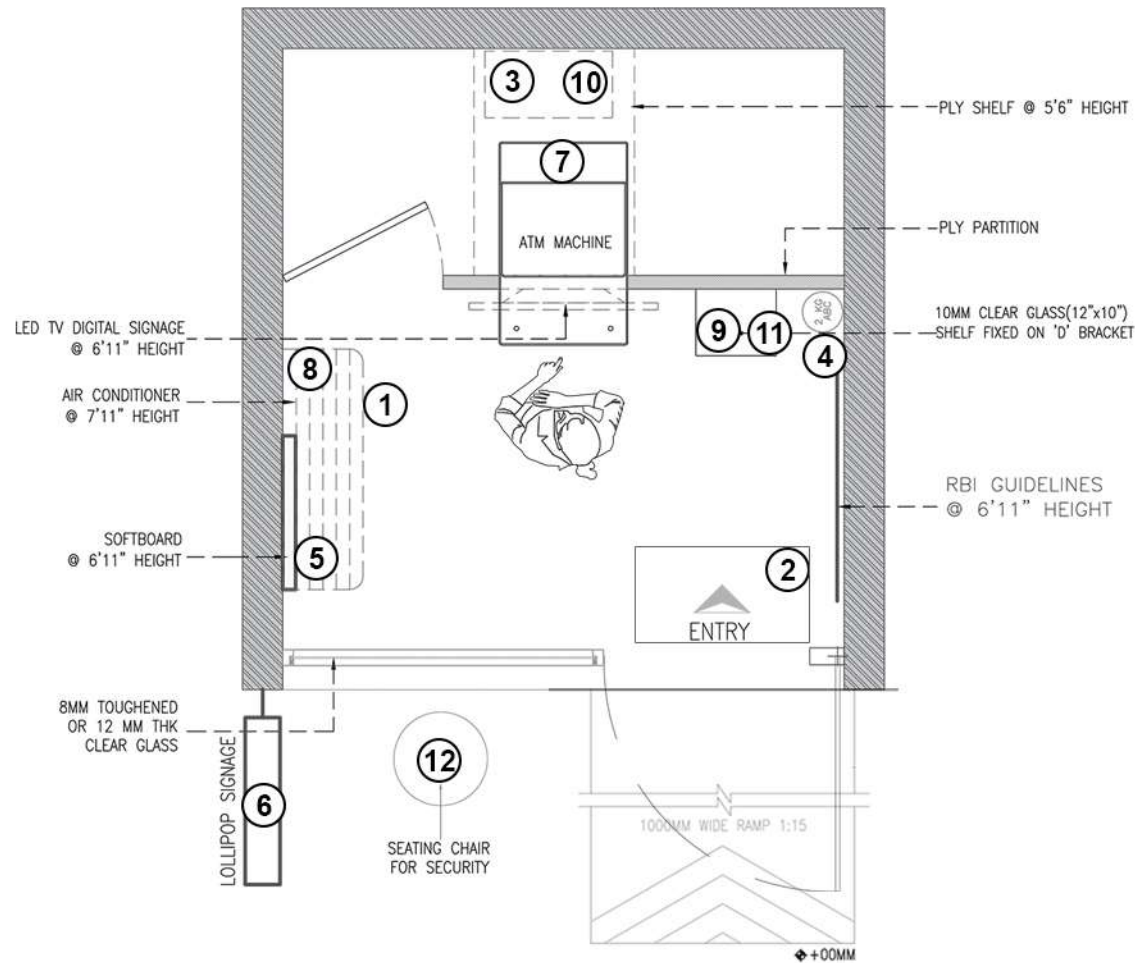


FURNITURE & EQUIPMENTS PLACEMENT (To be done by Franchisee)


Sr.No.	Items	Qty.
1	Air Conditioner	Minimum 0.5 Ton
2	Doormat	1
3	UPS (minimum 1KVA)	1
4	Fire Extinguisher	1
5	Soft Board	1
6	ATM Lollipop Signage	1
7	Digital Multimeter (For checking earthing value)	1
8	Franchisee Certificate Frame	1
9	Sanitizing Station	As per requirement
10	Earthing Point	0V to 3V
11	Cash Counting Machine	1
12	Chair or Stool for Security Person	1

Top View

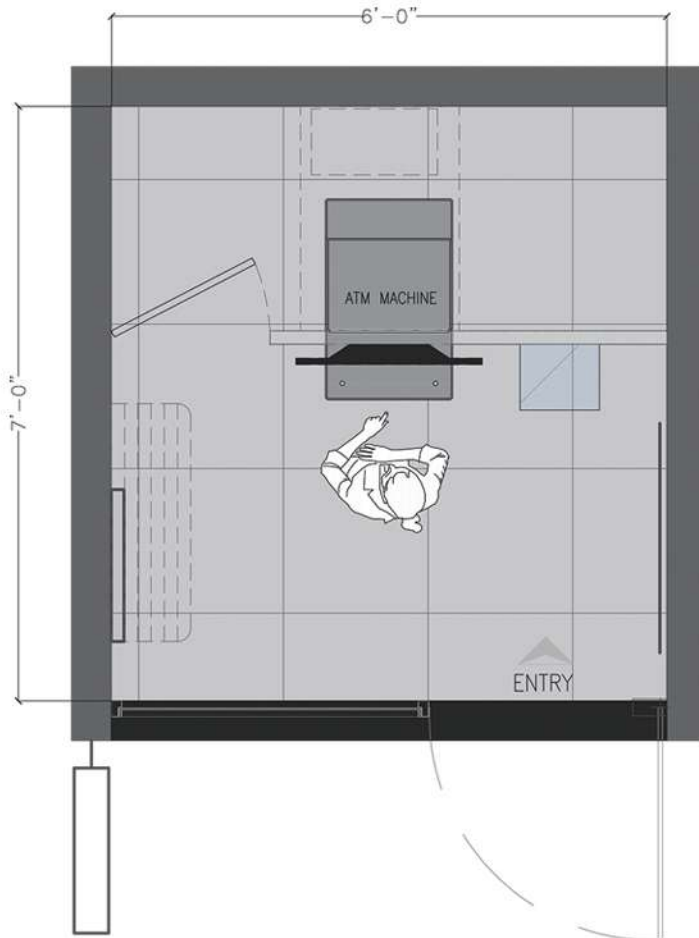


Isometric View

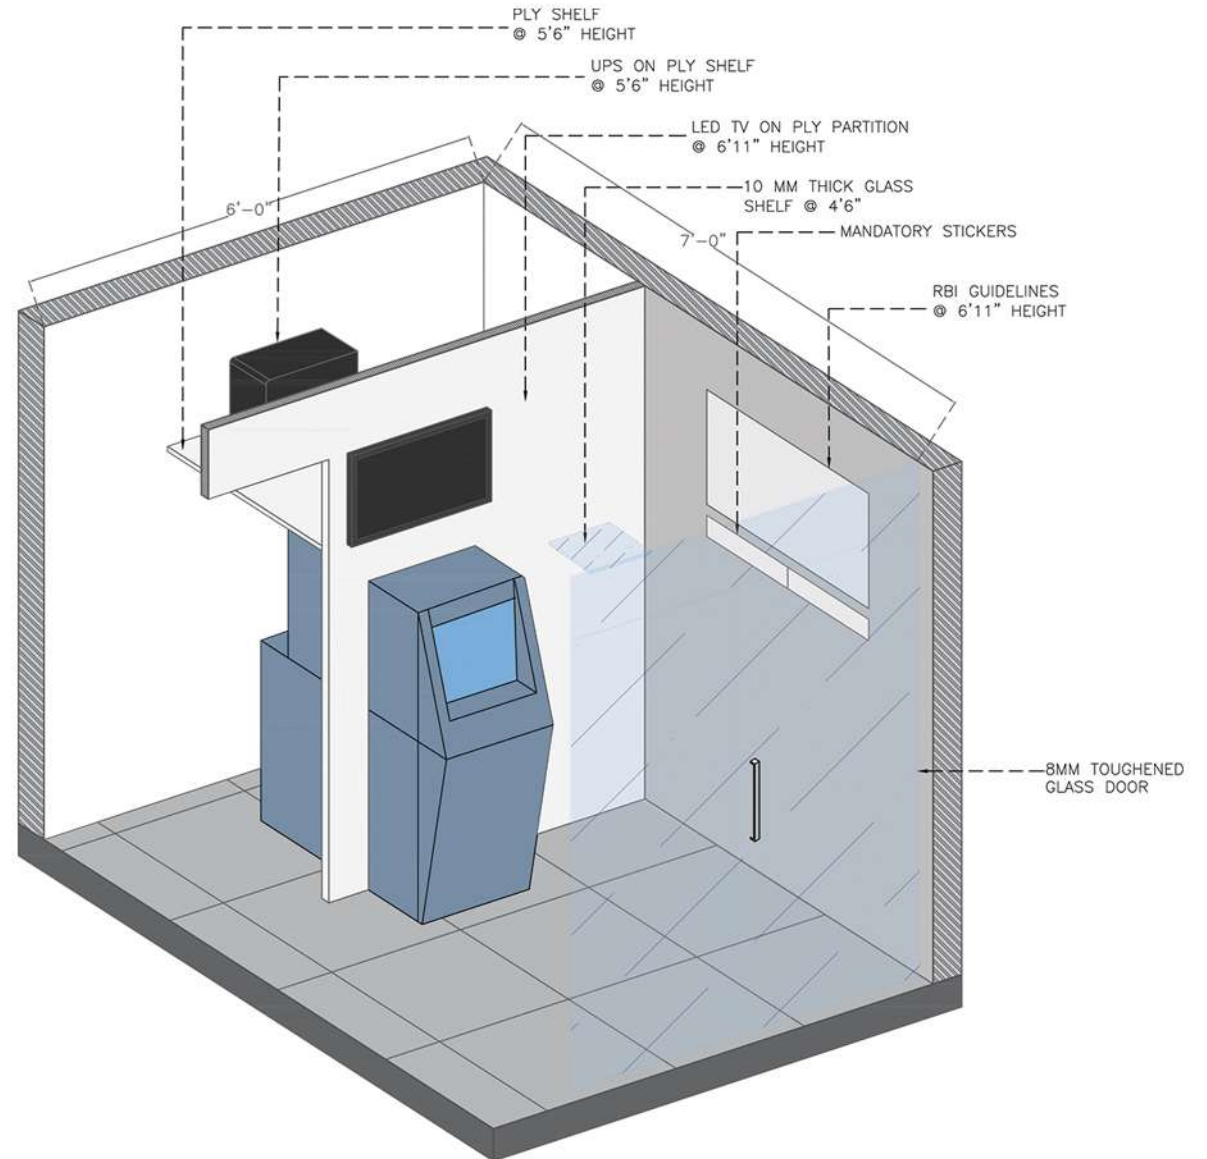

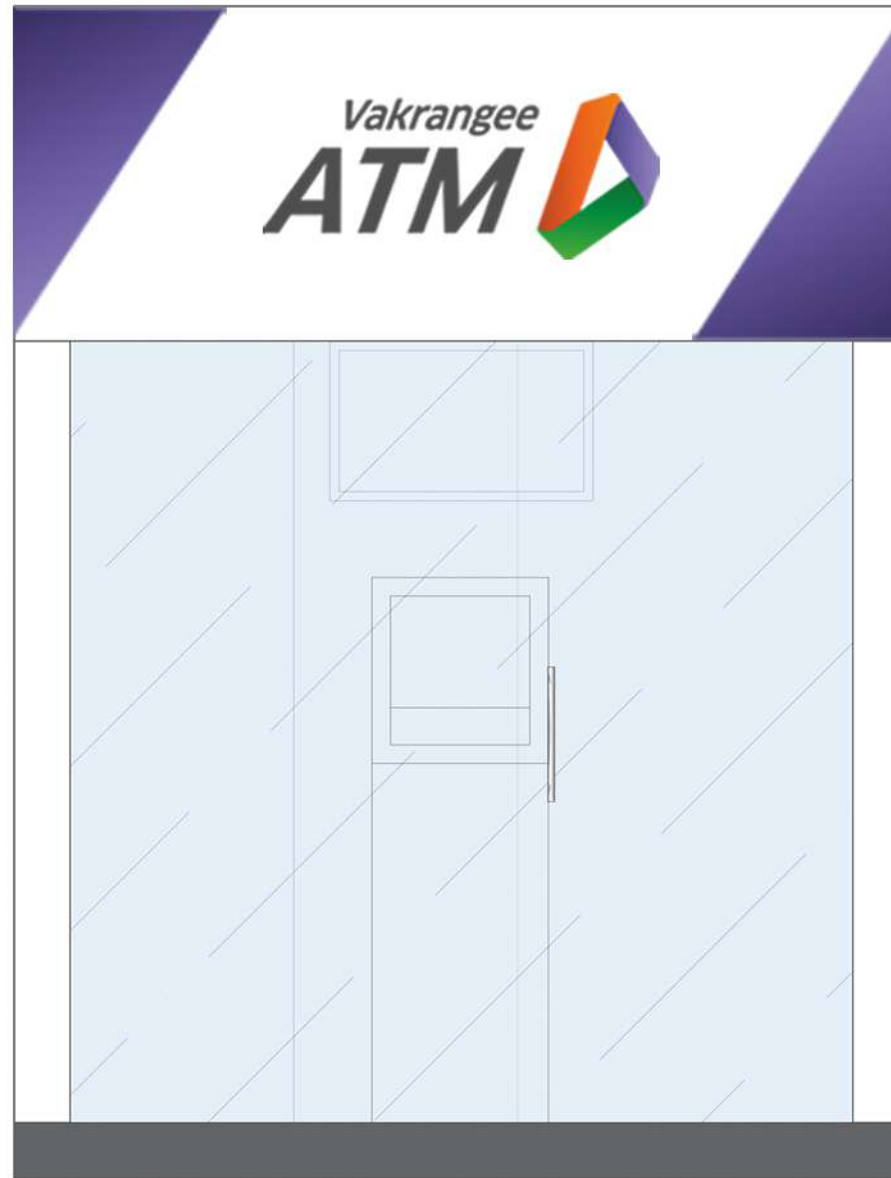

Drawings | Square format - Interior Lineout

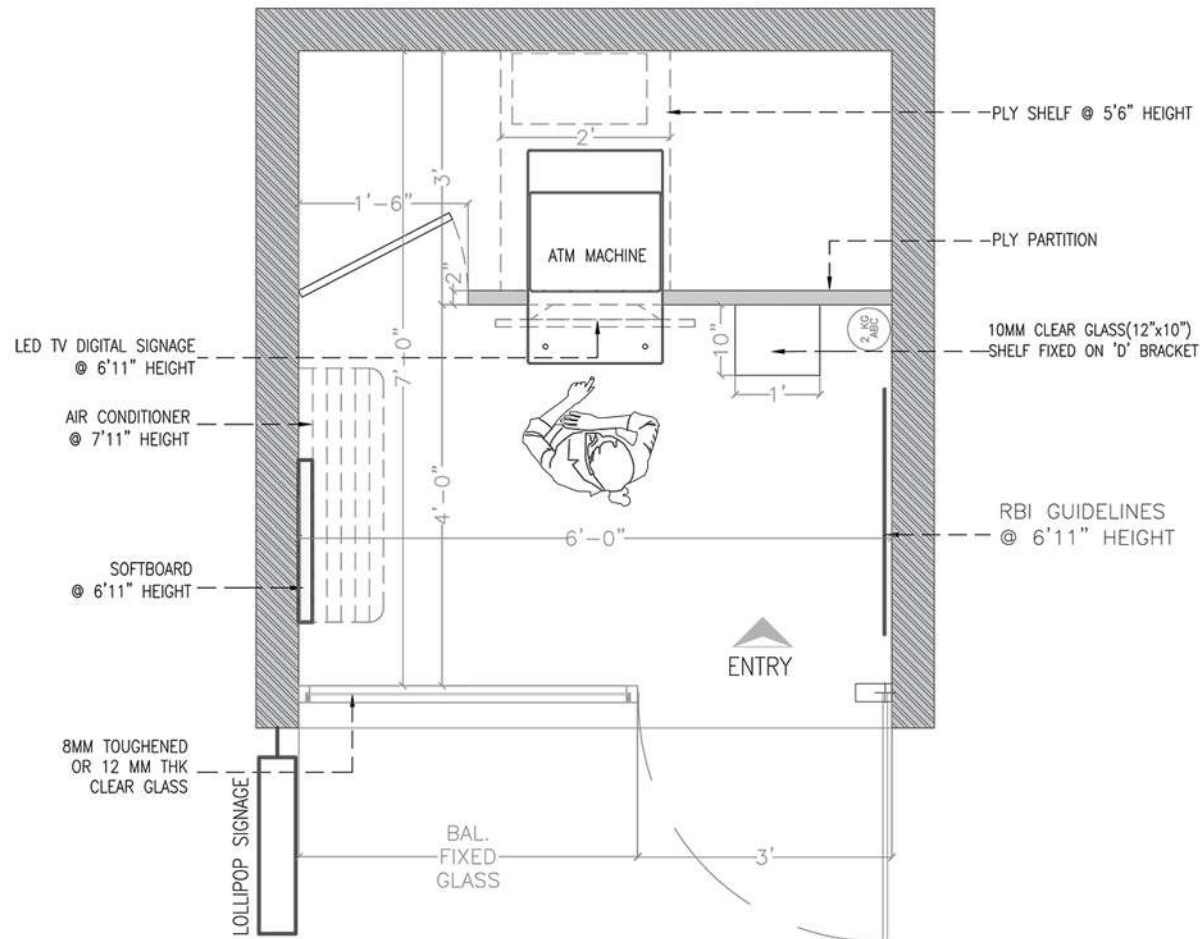

FIXED GLAZING SPECIFICATIONS



STRUCTURAL OPENING (UNFINISH TO UNFINISH)	SILL FROM FFL (IN MM)	LINTEL FROM FFL (IN MM)	WIDTH (IN MM)	HEIGHT (IN MM)	NOS.
WFGL 01	00	2150	AS PER SITE	AS PER SITE	1
WFGL 02	00	2150			1





DOOR SPECIFICATIONS

STRUCTURAL OPENING (UNFINISH TO UNFINISH)	WIDTH (IN MM)	HEIGHT (IN MM)
SERVICE AREA		
D1.01 .01	900	2150

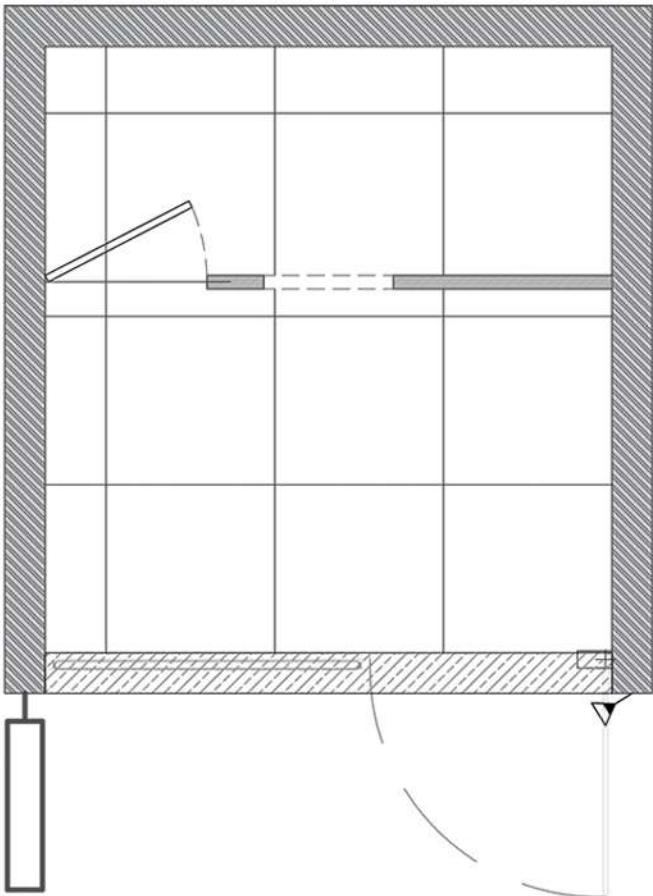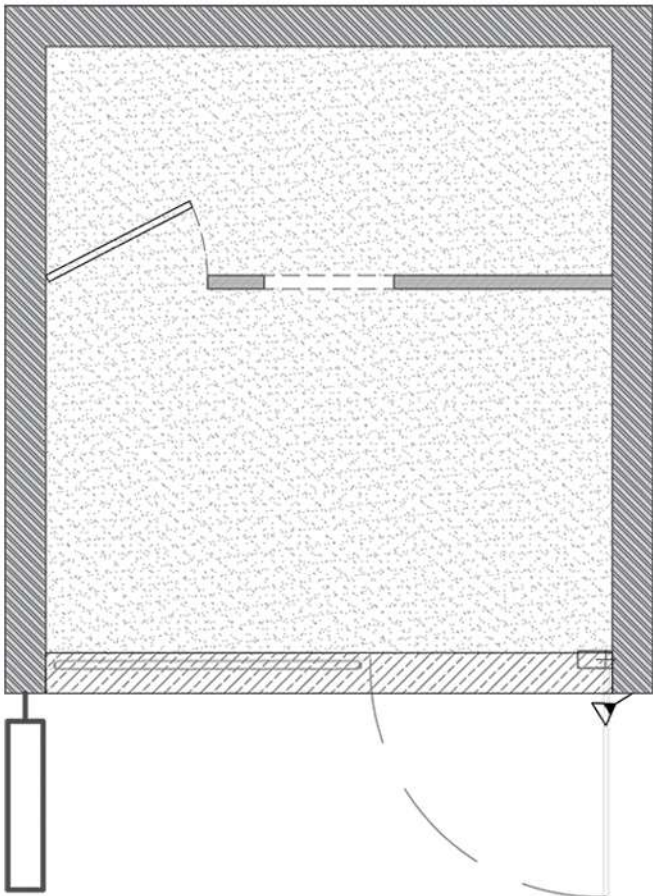
- DOOR HT. IS GIVEN CONSIDERING 50MM SCREED AND FLOOR TILE.
- ALL DOOR FINISHED HEIGHT TO BE 2100MM



Drawings | Square format - Flooring layout




LEGEND		
SYMBOL	SPECIFICATION	MAKE
	F01 ESCARA LIGHT GREY (600X600)	SOMANY CERAMICS
	F02 VINYL FLOORING-- ROLL FORM GENTLY GREY (K822-001)	ARMSTORNG
	GN1 GRANITE	
	SK-01 75MM HIGH SKIRTING SAME AS FLOOR TILES (FOR VINYL FLOORING AND TILES FLOORING)	

Drawings | Square format - Wall finishes layout

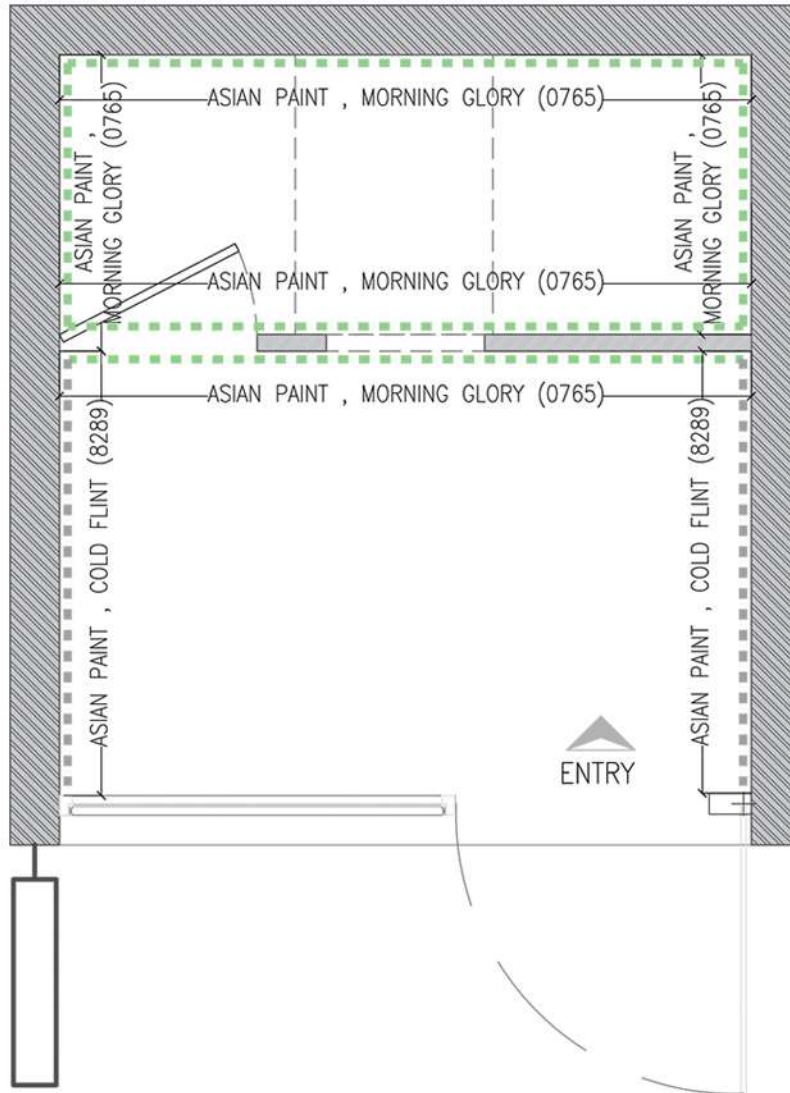


LEGEND OF FINISHES			
SR.NO	FINISHES CODE	DESCRIPTION	
PAINT			
1	PT-01 ■ ■ ■ ■ ■ ■ ■ ■	ASIAN PAINT , MORNING GLORY (0765).	
2	PT-02 ■ ■ ■ ■ ■ ■ ■ ■	ASIAN PAINT , COLD FLINT (8289).	

Drawings | Square format - RCP & Elec. power layout CCTV Camera installation

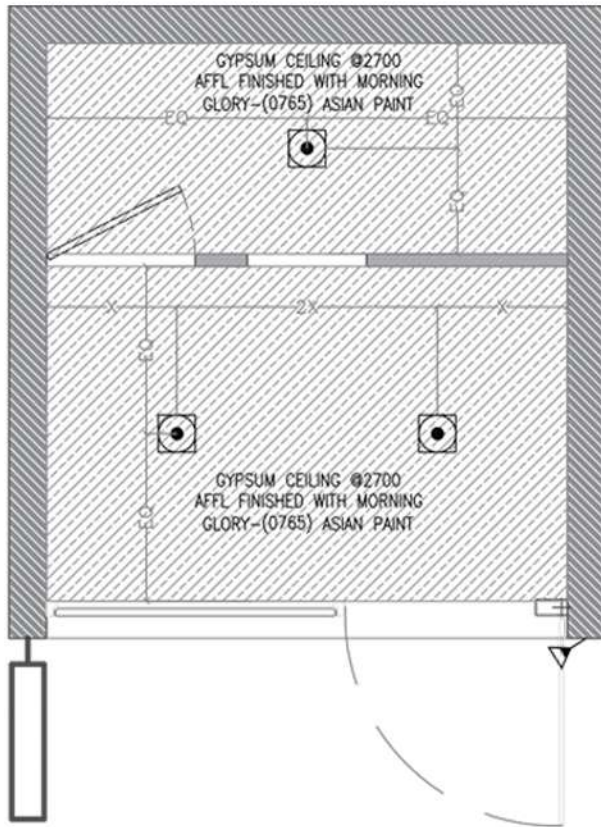

CEILING FINISHES LEGEND	
REF.	FINISHES
	GYPSUM CEILING @2700 AFFL FINISHED WITH MORNING GLORY-(0765) ASIAN PAINT


LIGHT FIXTURE LEGEND	
	150 W LED -BRIGHT WHITE -FOCUS LIGHT ABOVE EXTERNAL- MAIN SIGNAGE
	18 W RECESSED LED LIGHT 150X150

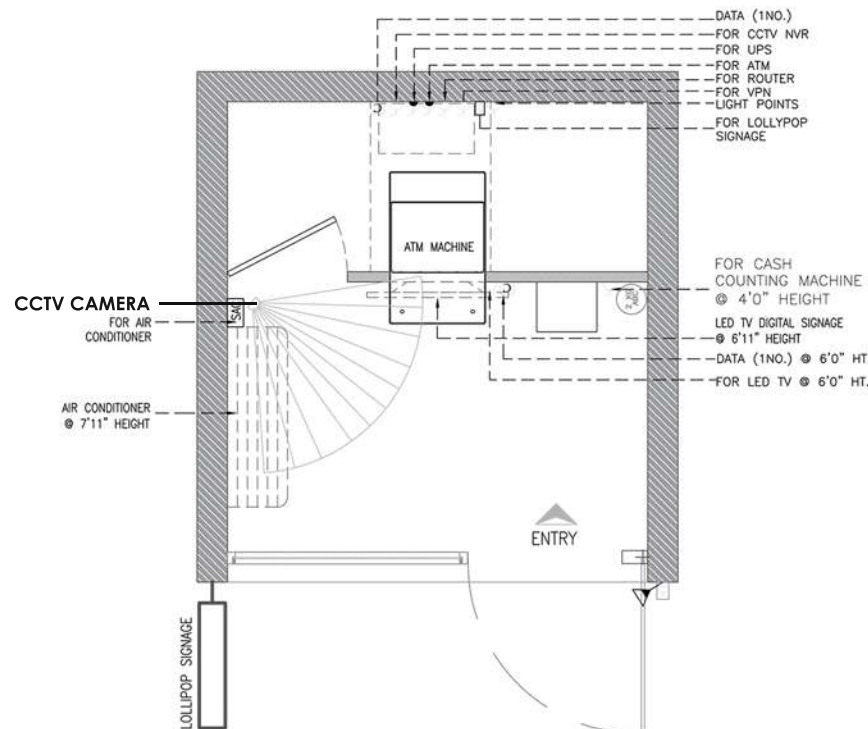

ELECTRICAL LEGEND:


	2/3 PIN 6A SWITCH SOCKET ON RAW POWER @ 4'0"
	3/3 PIN 16A SWITCH SOCKET ON RAW POWER
	3/3 PIN 6/16A SWITCH SOCKET ON UPS @ 4'0"
	2/3 PIN 16A SWITCH SOCKET EXTERNAL SIGNAGE @ 4'0"
	DATA OUTLET (CAT 6)
	32A AC SWITCH @ 2100m/6'11" FROM FFL AND AC AT 2400mm/7'11" FFL
	AC UNIT AT 7'11" FROM FFL
	SWITCH @ 1200m/4' FROM FFL-ANCHOR ROMA ROMA CLASSIC/ ANCHOR PENTA MODULAR WHITE PLATES
	2 kg ABC FIRE EXTINGUISHER AT 900mm/3' FROM FFL
	CCTV CAMERA @ CEILING HT LVL

Drawings | Square format - Signage layout

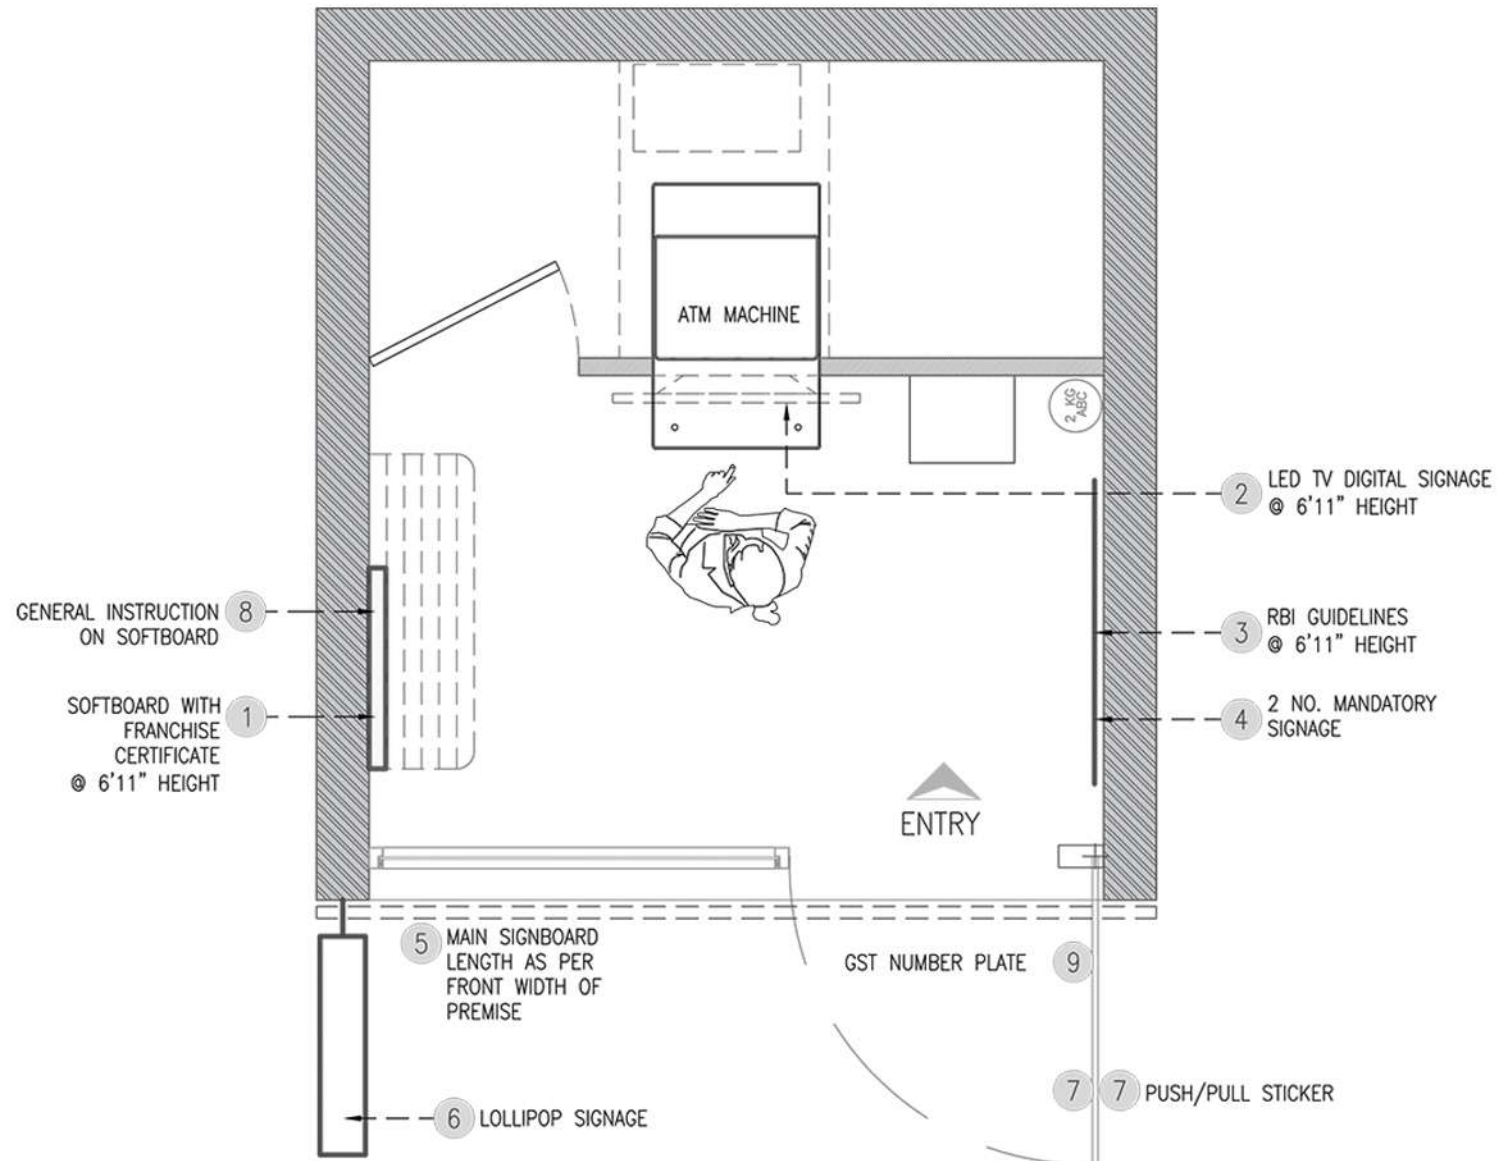


Note - Refer page number 46 for more details


Drawings | Square format - Internal elevations

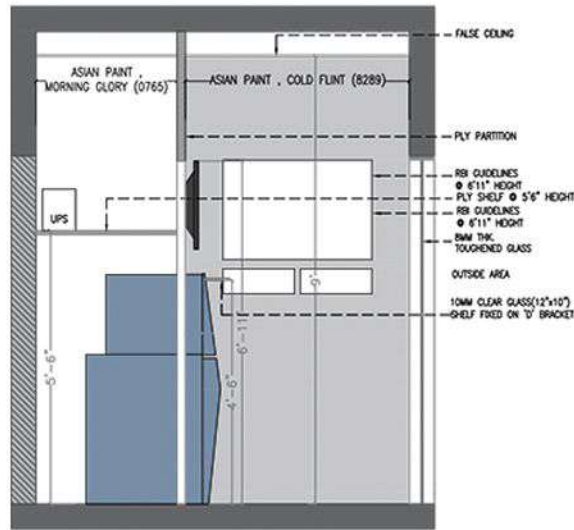


04 1:50 INTERNAL ELEVATION-04
XIE-0101

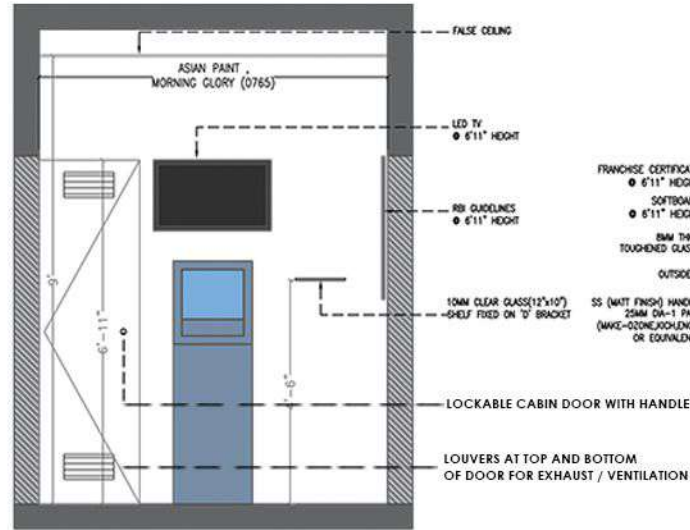


02 1:50 INTERNAL ELEVATION-02
XIE-0101

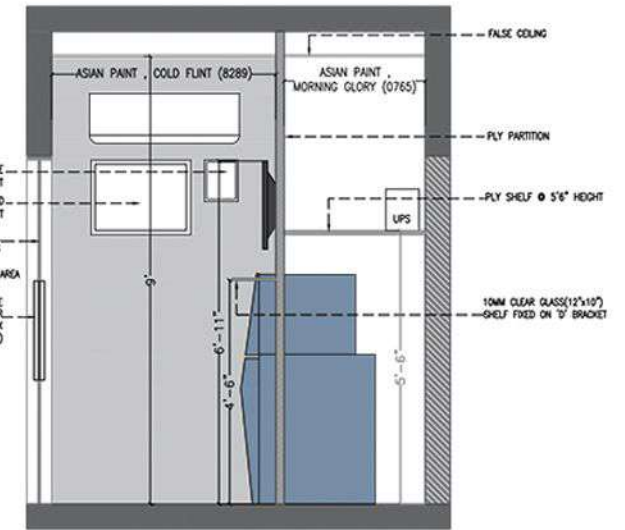

03 1:50 INTERNAL ELEVATION-03
XIE-0101

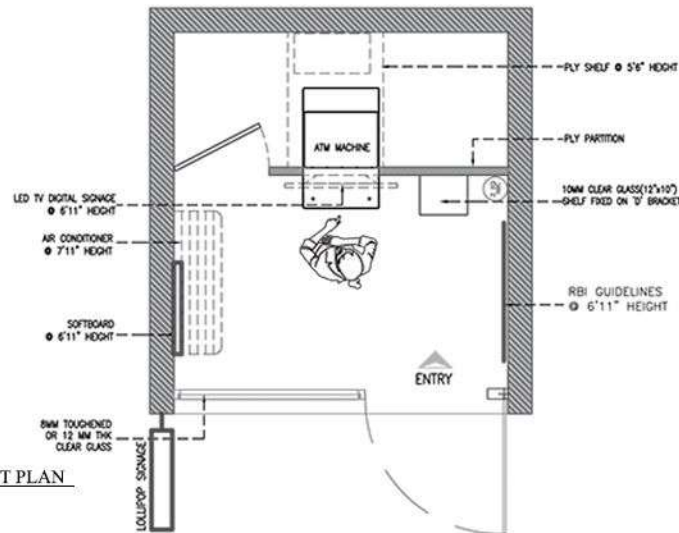

01 1:20 GENERAL ARRANGEMENT PLAN
XIE-0101

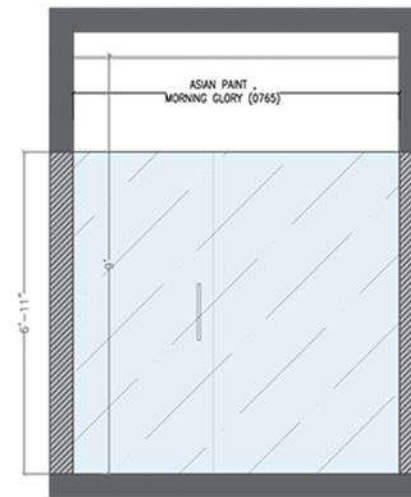

05 1:50 INTERNAL ELEVATION-05
XIE-0101

Typical DETAILS

drawings

03.4


- External elevations
- Door detail
- RAMP
- Placement of Equipments
- ATM Cabin Details
- ATM Earthing Diagram
- CCTV Camera Layout

Drawings | Typical details - External elevations

Vakrangee will provide the Flex Artwork



1:20 FRONT FACADE
EXTERNAL ELEVATION

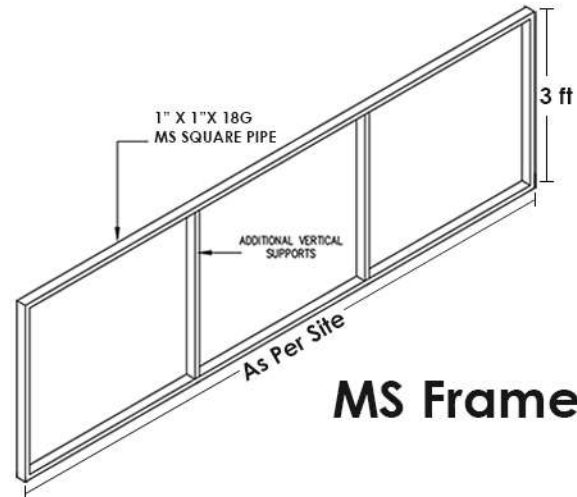


MS Frame

Main Signboard Frame - To be made by Franchisee
MS Square pipe (1"X1"X18 gauge)
Height - 3 ft (Standard)
Length - To be made as per the Flex Artwork supplied by Vakrangee

Main Signage Specifications

- **Flex to be printed and installed by Franchisee**
- Flex Media - StarFlex - Avery dennison - LG Flex quality - Front lit flex with Grey or Black back - minimum 14 oz.
- Printing technology - HP latex - Third Generation Lamination - Gloss

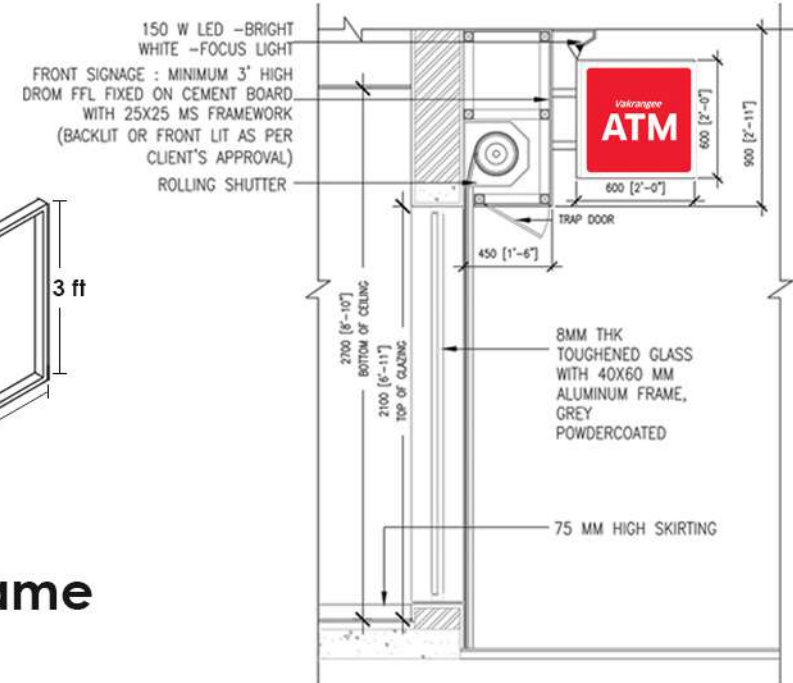




LOLLYPOP SIGNAGE -

OPTION 1
DOUBLE SIDED WALL MOUNTED FLANGE
SIZE - 2ft x 2ft x 5 inch(depth)


MATERIAL SPECS:
WHITE COLOUR ACRYLIC MOLDED FLANGE WITH ALUMINUM FRAME.
TO BE FIXED WITH M. S BRACKETS ON WALL WITH FASTENERS.
VINYL - STAR/3M/LG VINYL
PRINTING - 3RD GENERATION HP LATEX PRINTING OR PLOTTER CUT VINYL
LIGHT - LED STRIP LIGHTING SYSTEM

OPTION 2
GLOW SIGNBOARD WITH 1"X1" MS SQUARE PIPE BOX FRAME WITH ALUMINUM L ANGLE ON BORDER FOR EDGE TO EDGE LIGHTING WITH LED STRIP / TUBELIGHT.
PRINTING - BACKLIT STARFLEX ON HP LATEX PRINTER WITH BACK TO BACK FLEX PRINTING WITH 3 YEAR WARRANTY

Drawings | Typical details - Door 1/2

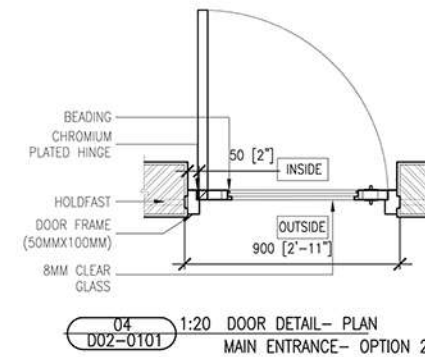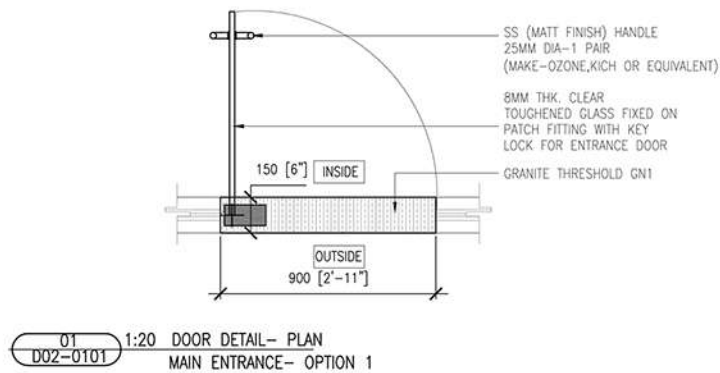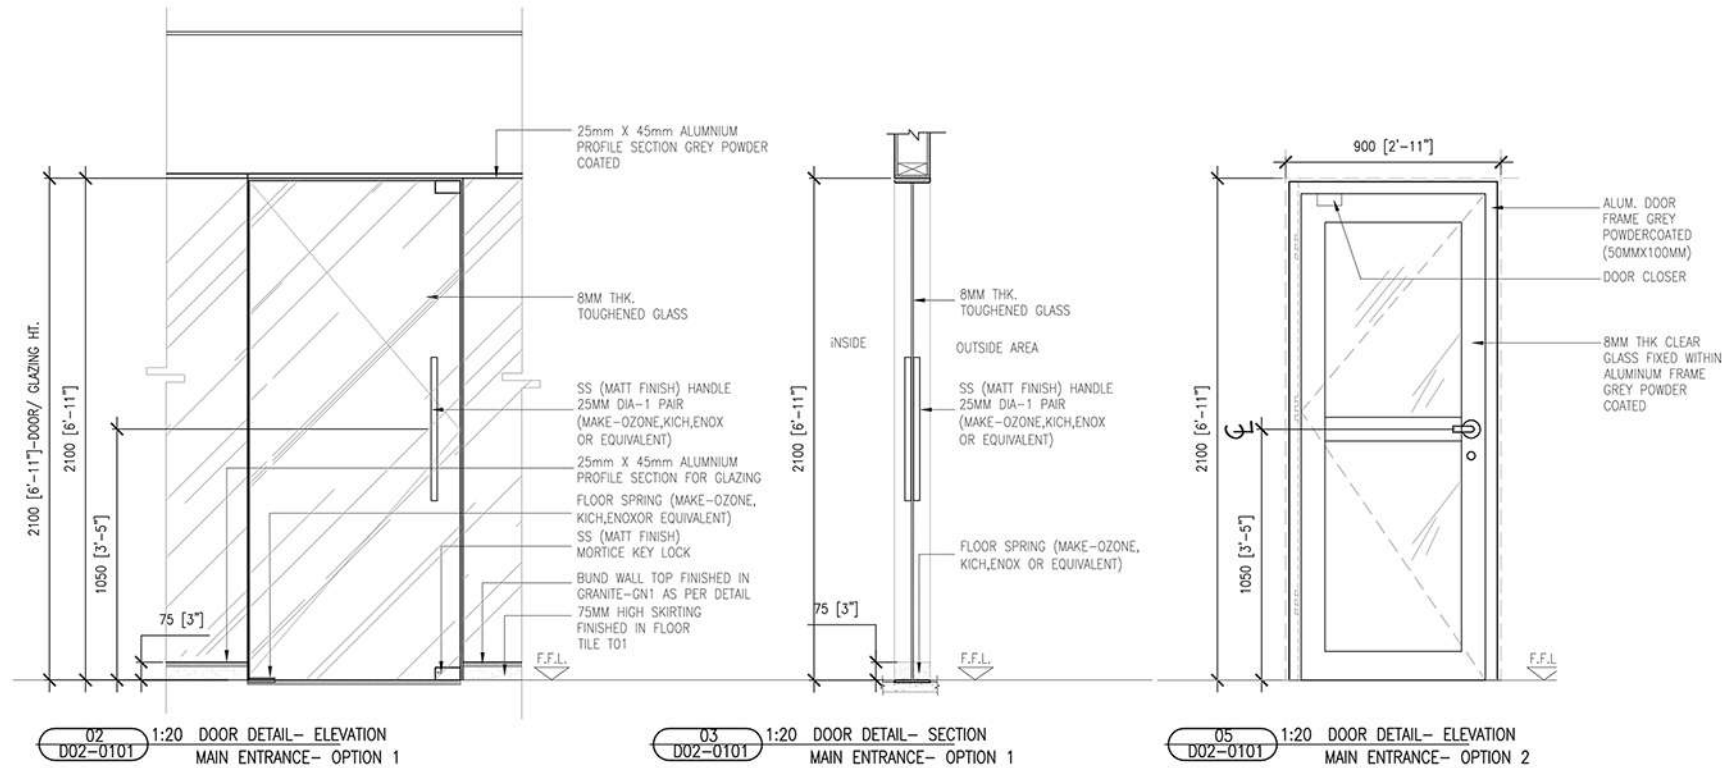



Drawings | Typical details - Door 2/2

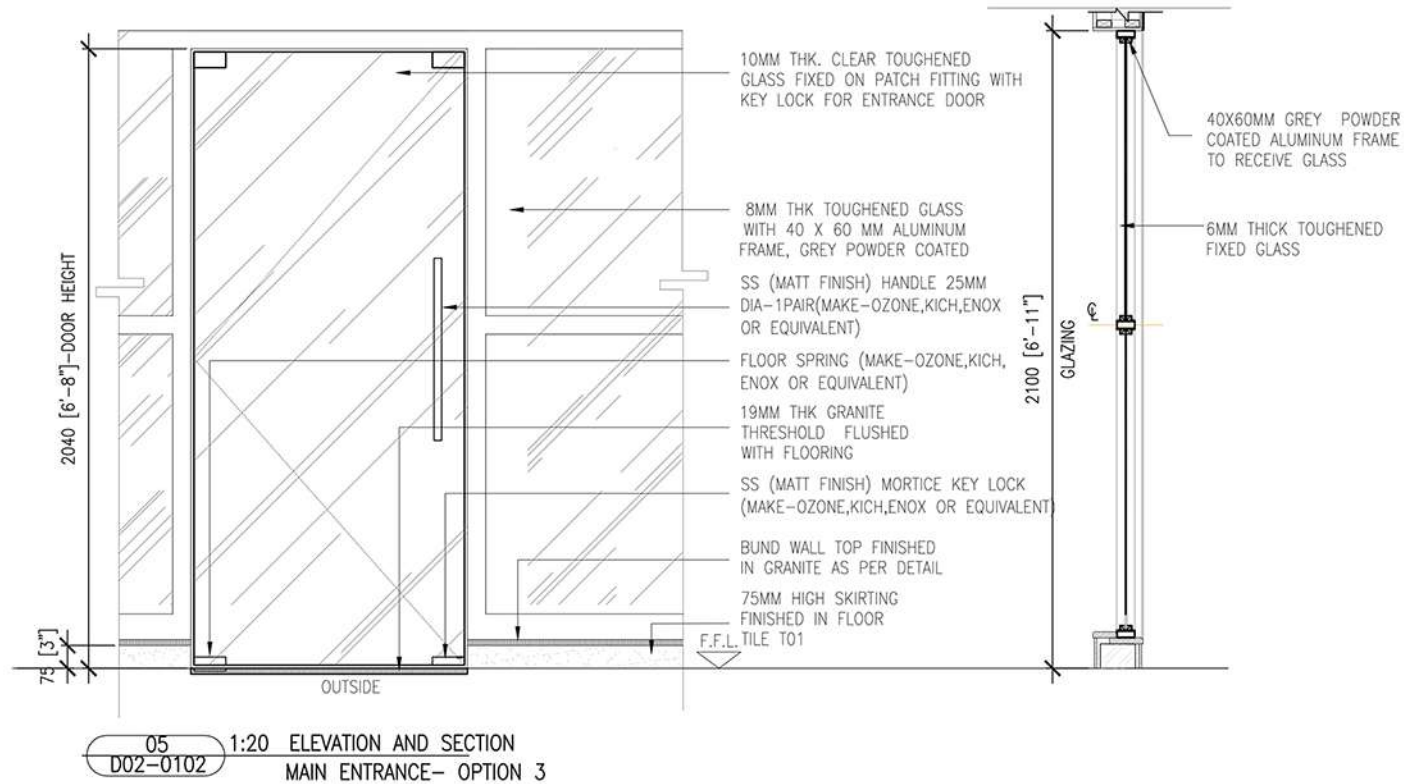


NOTE:

- TOUGHENED GLASS IS RECOMMENDED FOR SAFETY. IF 8 MM TOUGHENED GLASS IS NOT AVAILABLE, FRANCHISEE TO USE 12 MM CLEAR GLASS.
- IF GREY POWDER COATING IS NOT AVAILABLE, FRANCHISEE TO USE NATURAL ALUMINUM FINISH.

Drawings | Typical details - Ramp

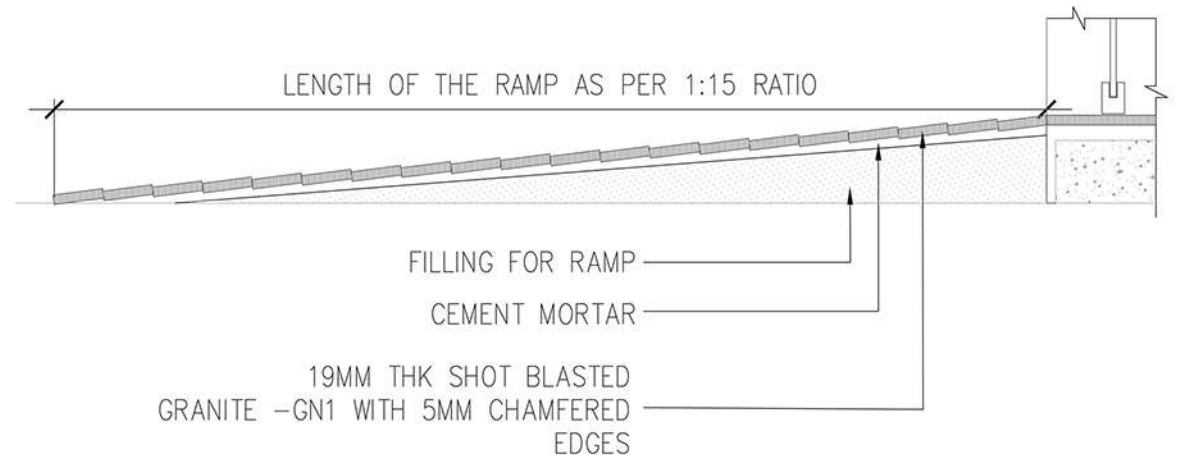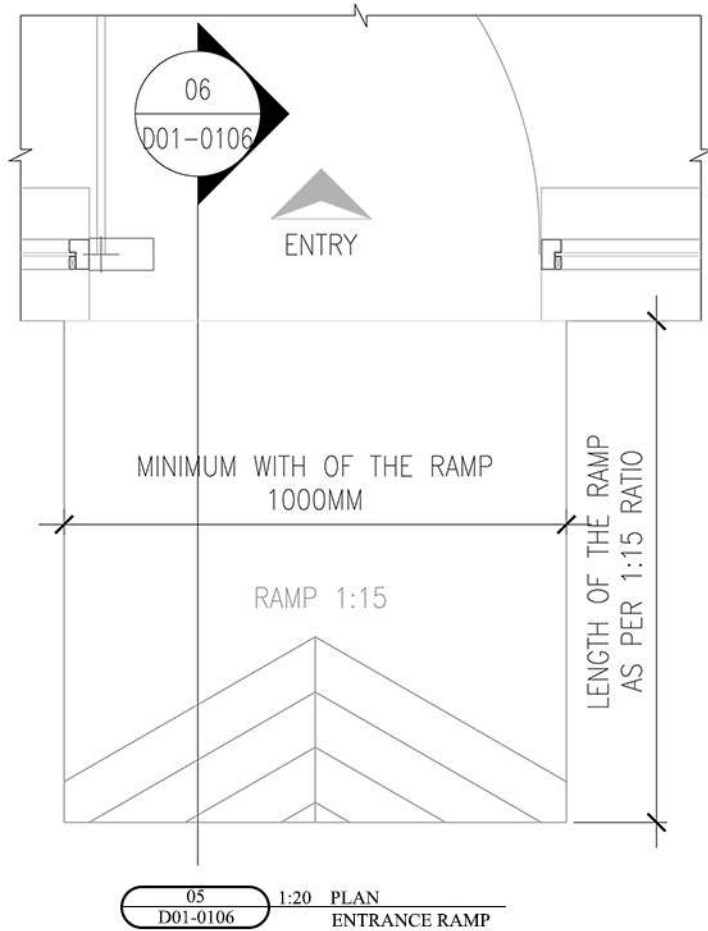






06
D01-0106 1:20 SECTION - OPTION 1
ENTRANCE RAMP

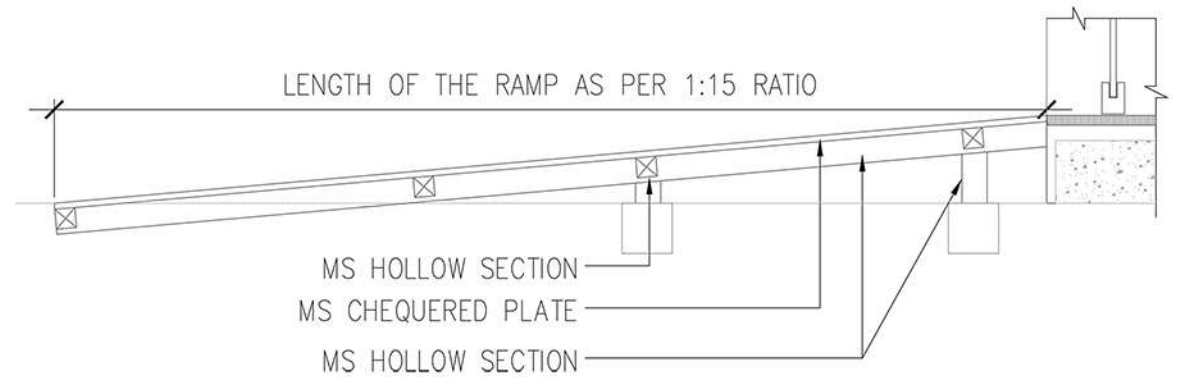


06
D01-0104 1:20 SECTION - OPTION 2
ENTRANCE RAMP

NOTE : Provision of RAMP is preferred to facilitate easy access to ATM by person with disability / Senior Citizen.

Drawings | Typical details - ATM Cabin Details

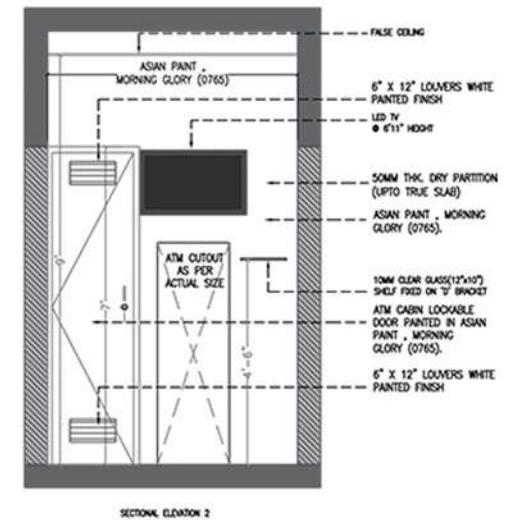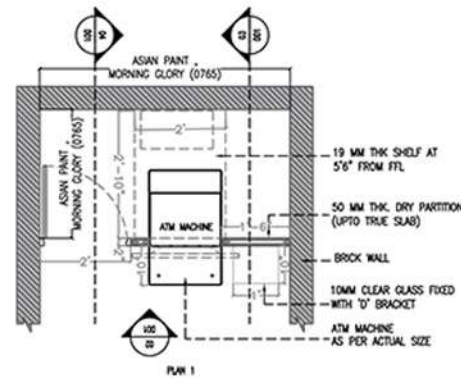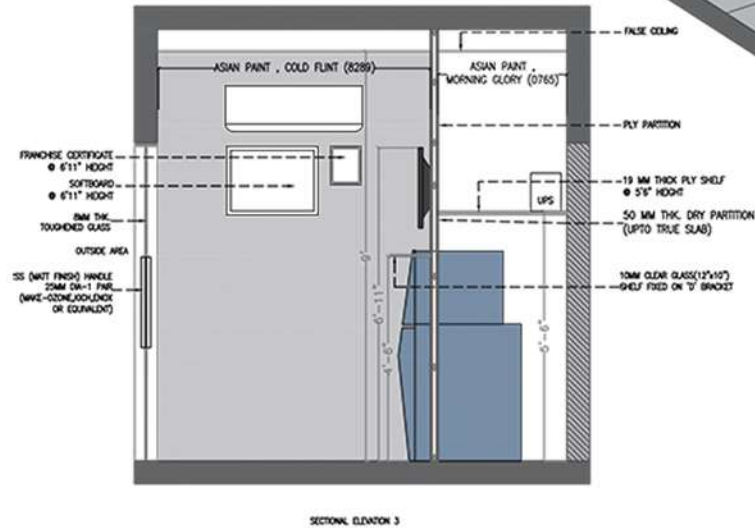
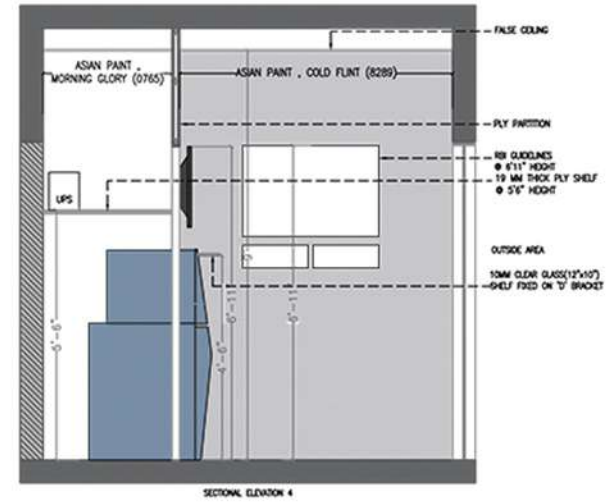
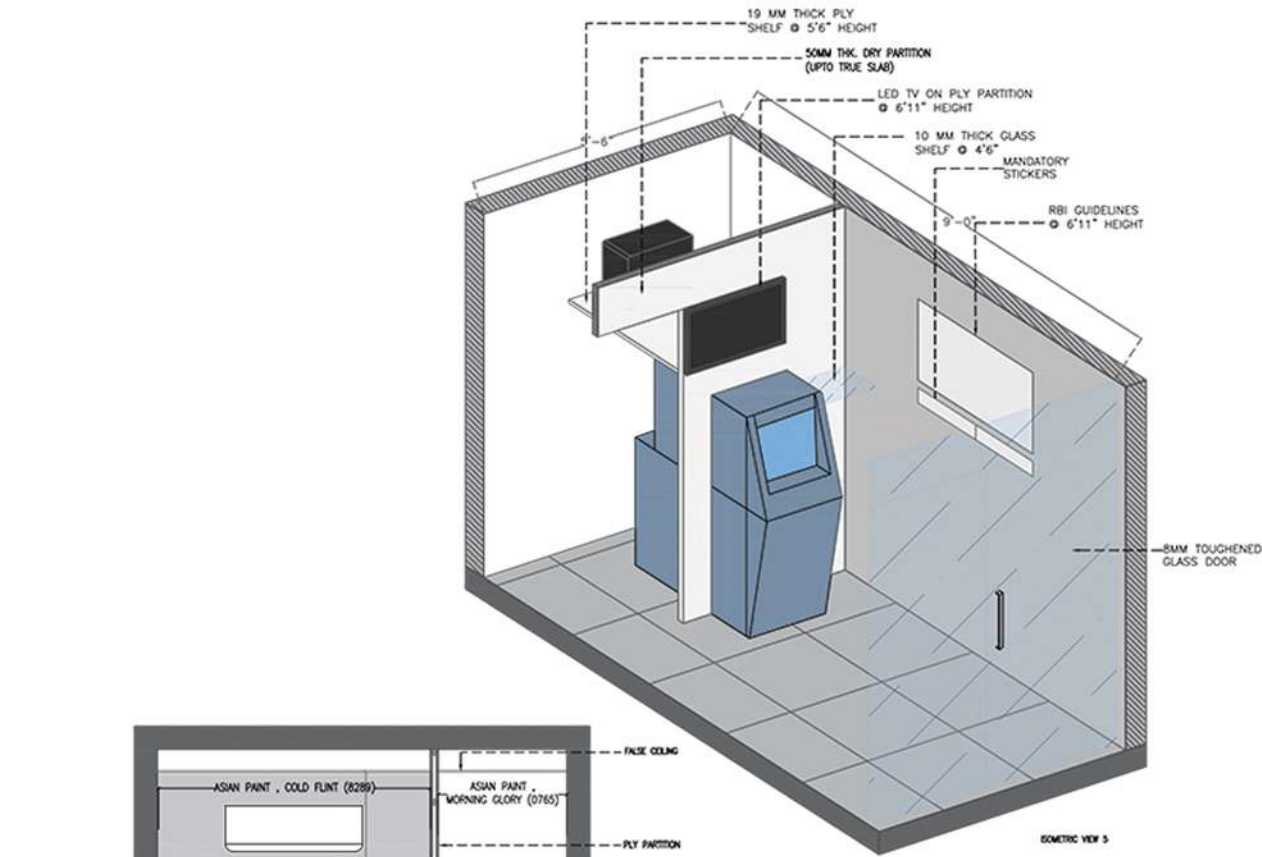


Drawings | Typical details - ATM Earthing Diagram

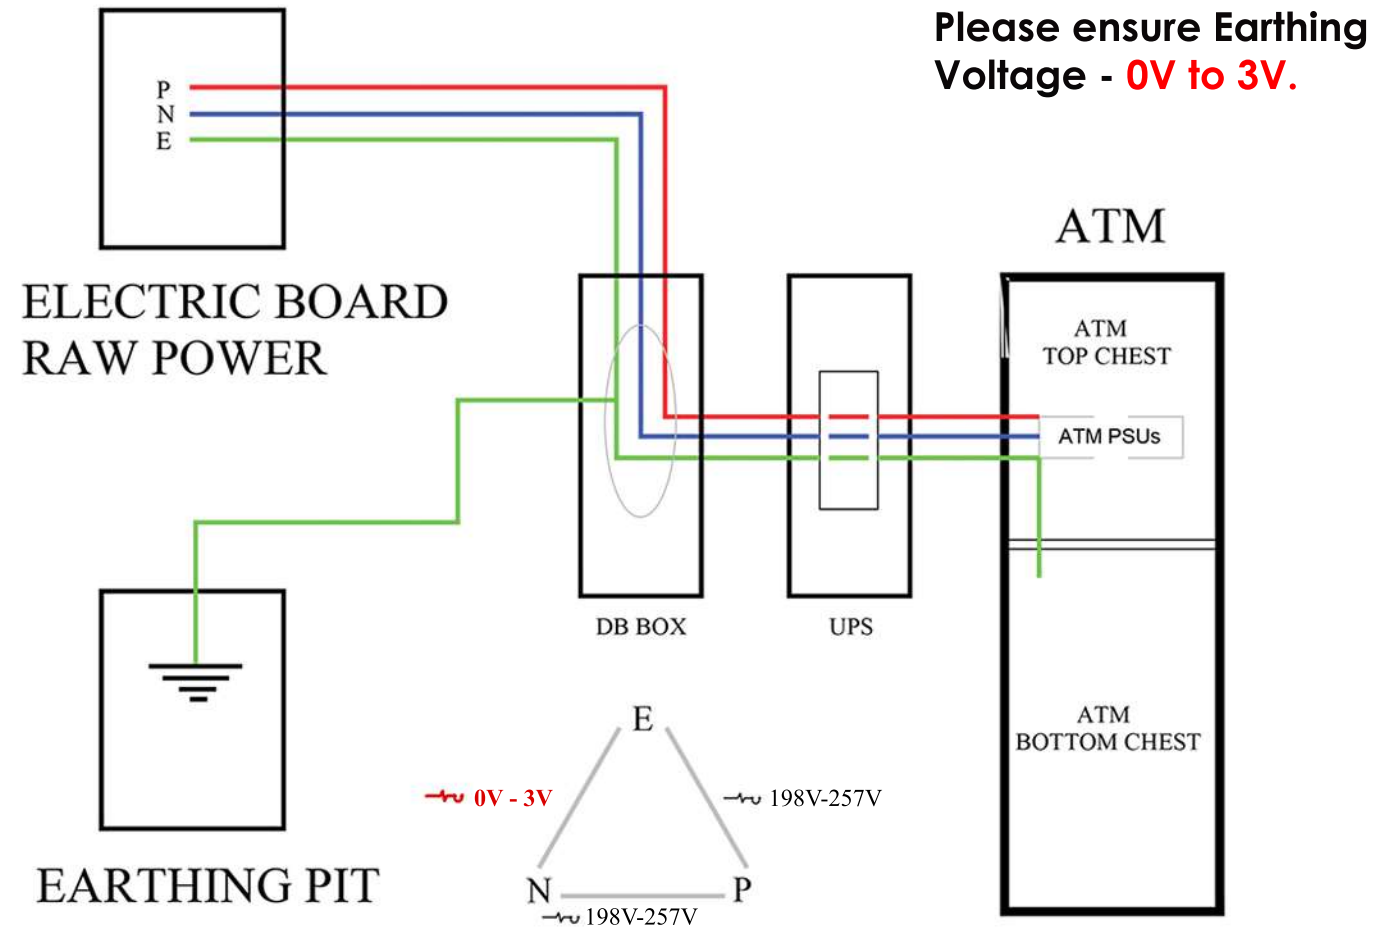




1 ATM ELECTRICAL & EARTHING
Scale: 1:50

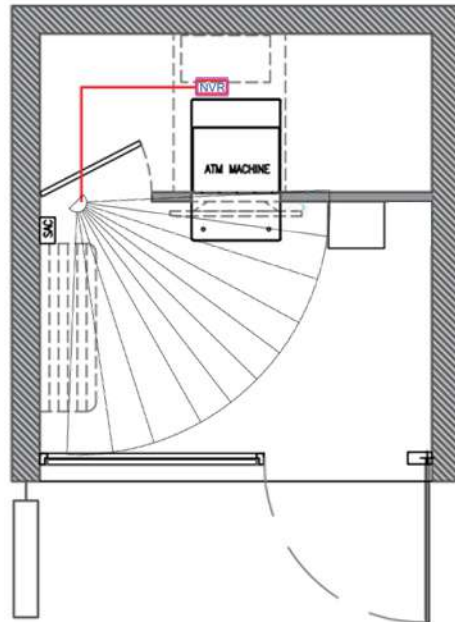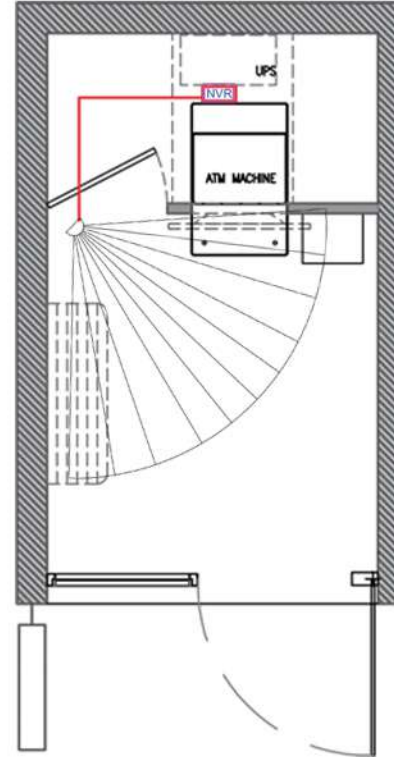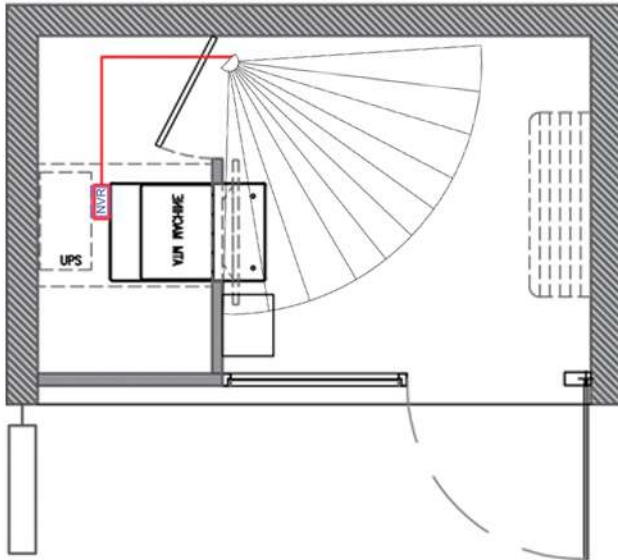Drawings | Typical details - CCTV Camera Layout




LEGEND:

	NVR
	CAT- 6 WIRING FOR CCTV
	CCTV CAMERA @ CEILING HT LVL

Note :

- Please keep extra cable length of 2mtr at the CCTV camera location for smooth installation.
- The position of the CCTV camera must ensure coverage of the ATM loading and cash dispense operations
- The CCTV system shall have a backup of 90 days.
- The camera should be placed in such a way that it does not capture the pin being entered by the customer


Drawings | Typical details - Placement of Equipments

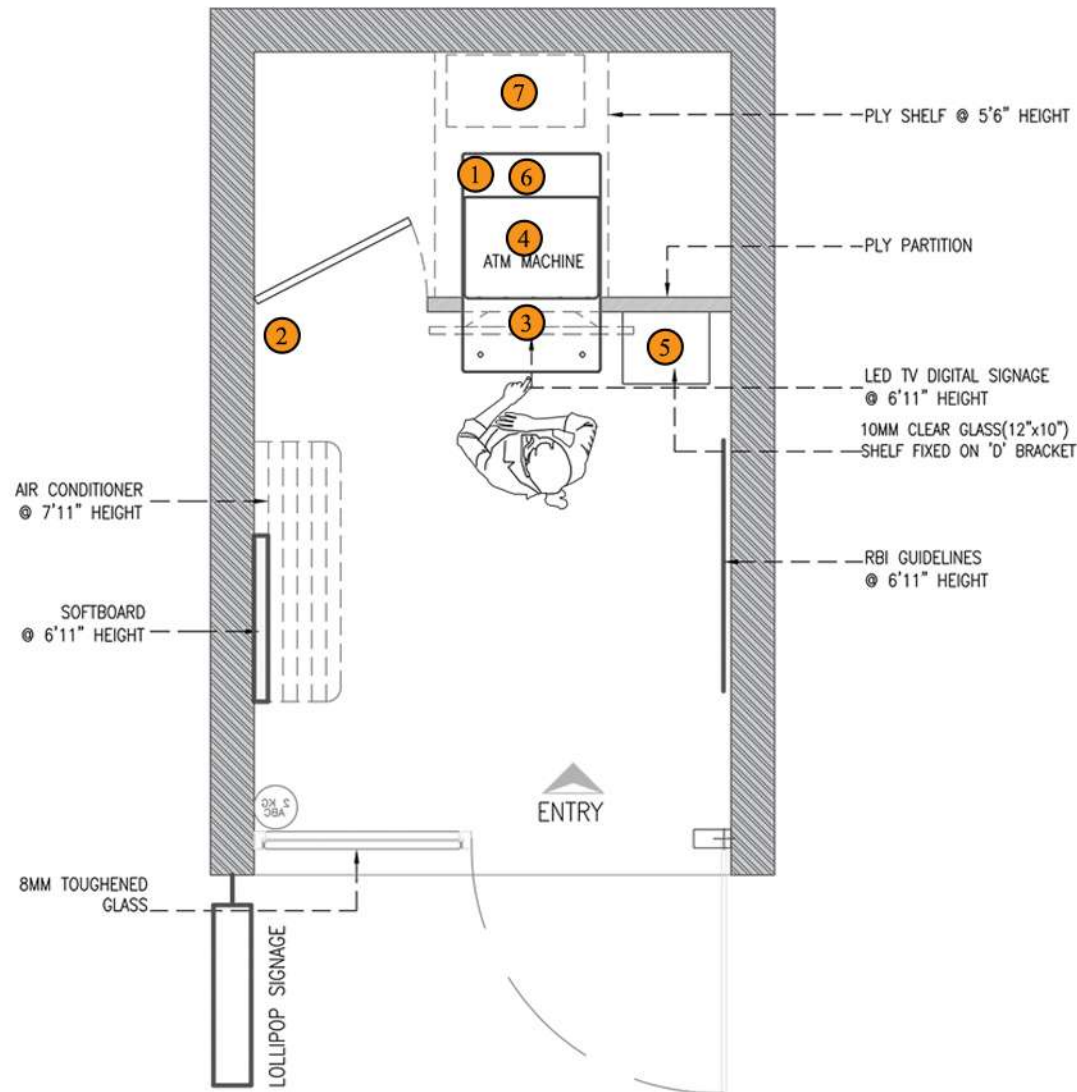

1 - NVR FOR CCTV



2- CCTV CAMERA



3 - DIGITAL SIGNAGE



4 - ATM MACHINE



5 - CURRENCY COUNTER
- FAKE NOTE DETECTOR

EQUIPMENT TO BE PURCHASED BY FRANCHISEE



6 - DIGITAL MULTIMETER




7 - 1 KVA UPS
WITH BATTERIES

Marketing elements
and signage

04

Marketing element and signage

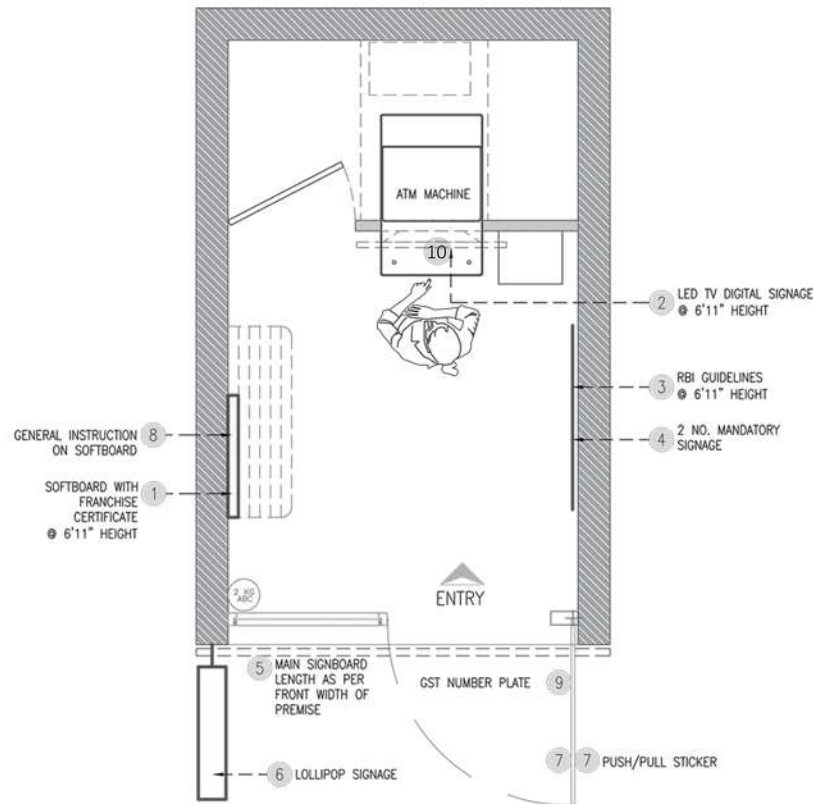

10 - ATM Screen



05 - Main Signage @ lintel level - length as per site.



07 - Push and pull sign - 5"x 5"



09 - GST Name plate - 11.693"x8.268 Vinyl sun board



02 - LED Digital Signage



4 - 2 Nos. of Mandatory Signages - 16"x5"



06 - Lollipop Signage 600x600mm



01 - Franchisee Certificate 210x297mm. Certificate Artwork will be provided by Vakrangee. Black Photo frame to be procured by Franchisee.



For Kendra without Ramp use Artwork 7-A



For Kendra with Ramp use Artwork 7-B

03 - RBI Guidelines 943x535mm printed on vinyl and pasted on 3 mm thick sunboard




08 - Covid-19 Do's and Don'ts - 16.535"x11.693 Vinyl sun board


Design Guidelines for Shop - in - Shop ATM Installation

05


Drawings | ATM Cabin - General arrangement plan

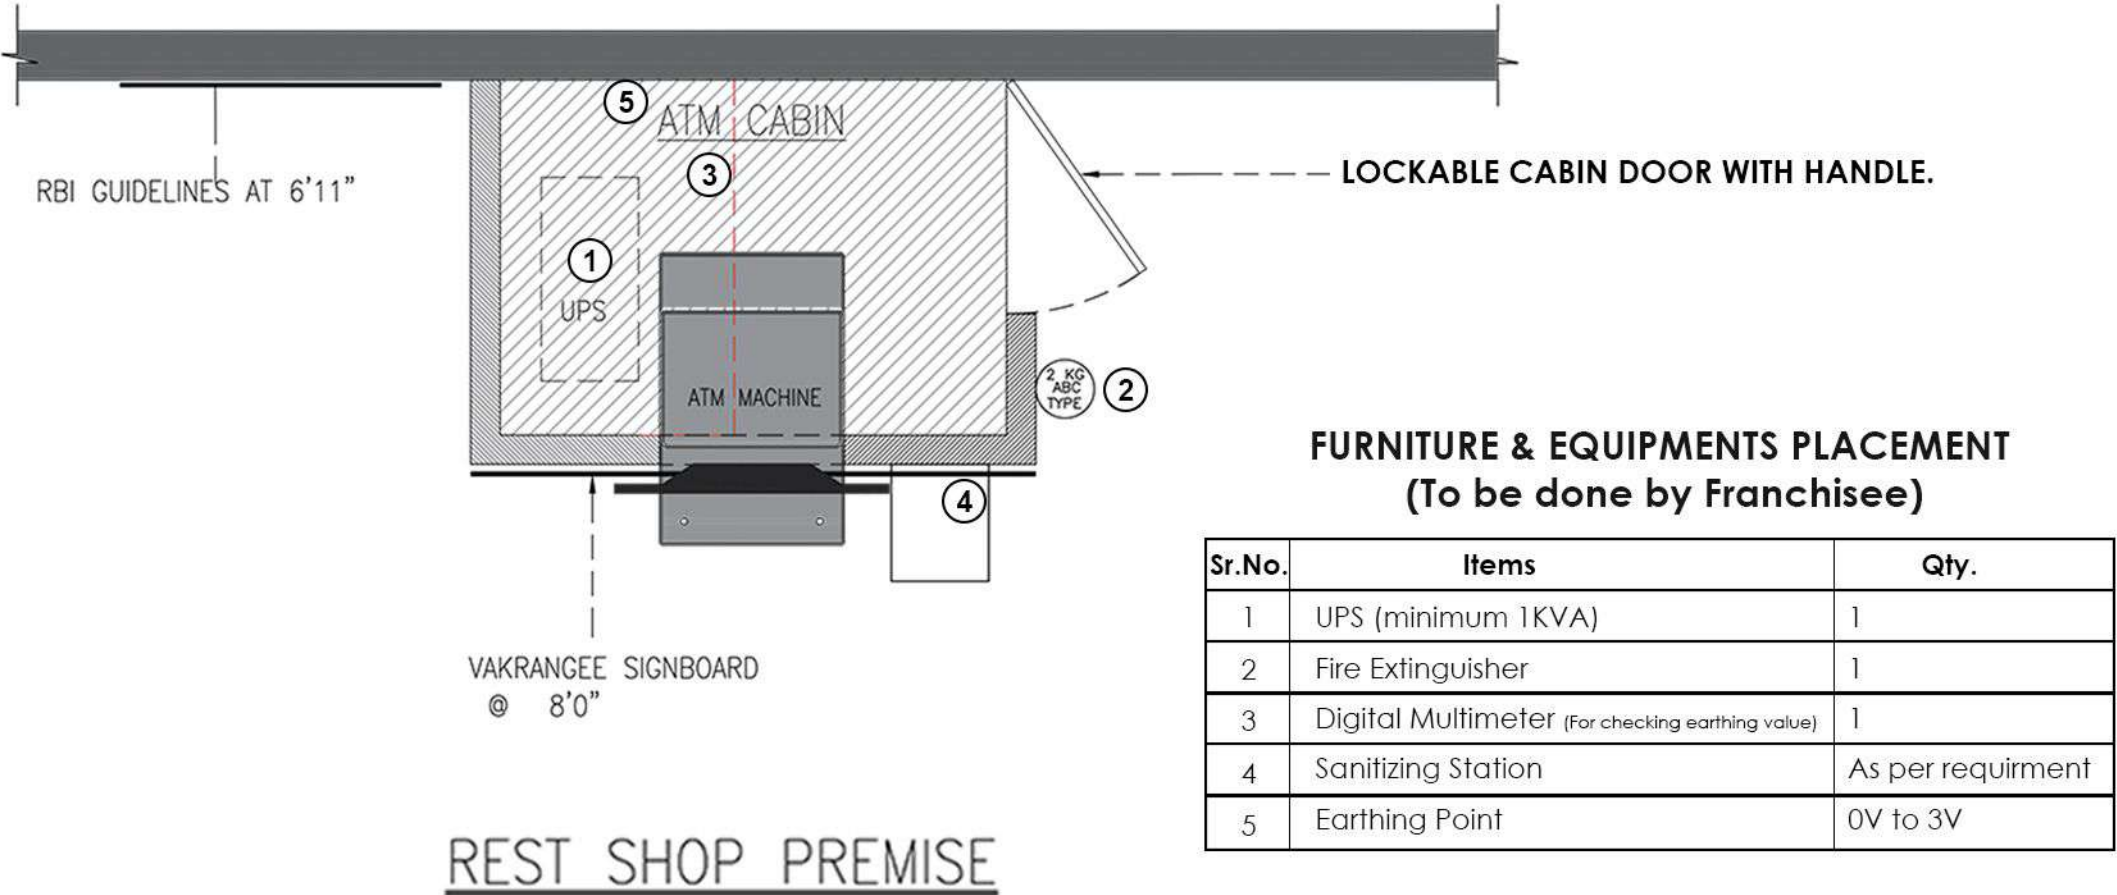


Drawings | ATM Cabin - Top View and Isometric view

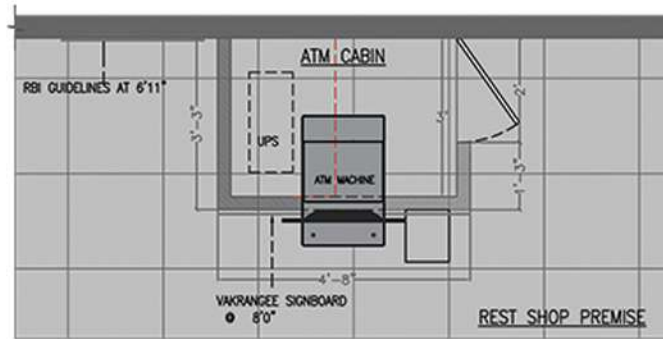

TOP VIEW

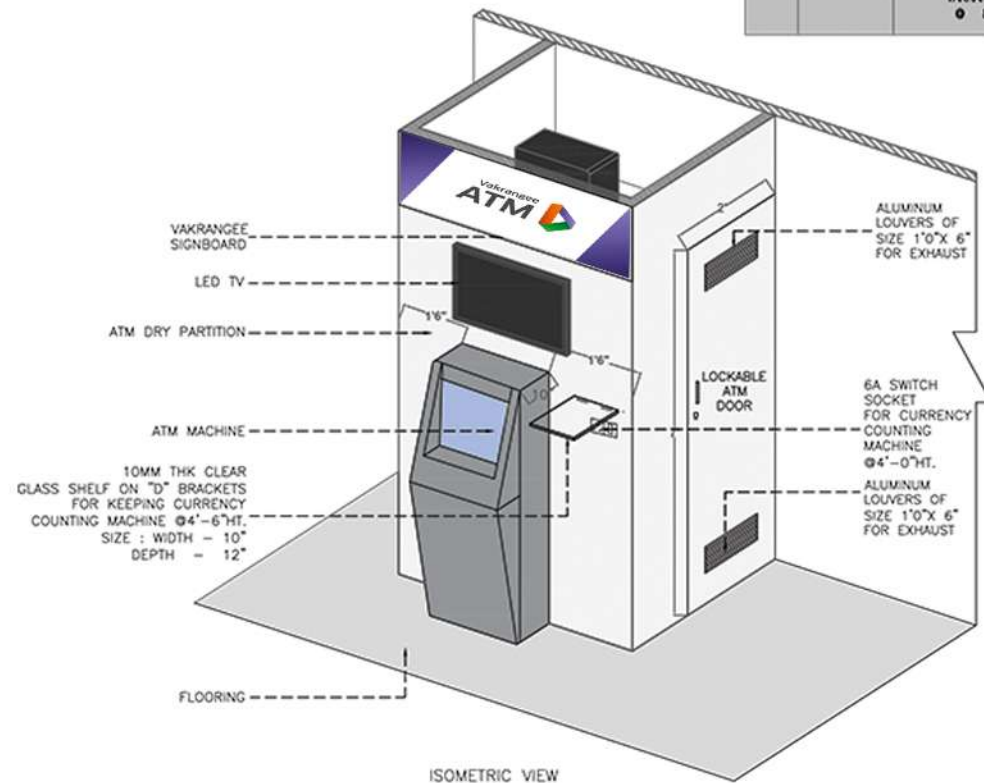


ISOMETRIC VIEW

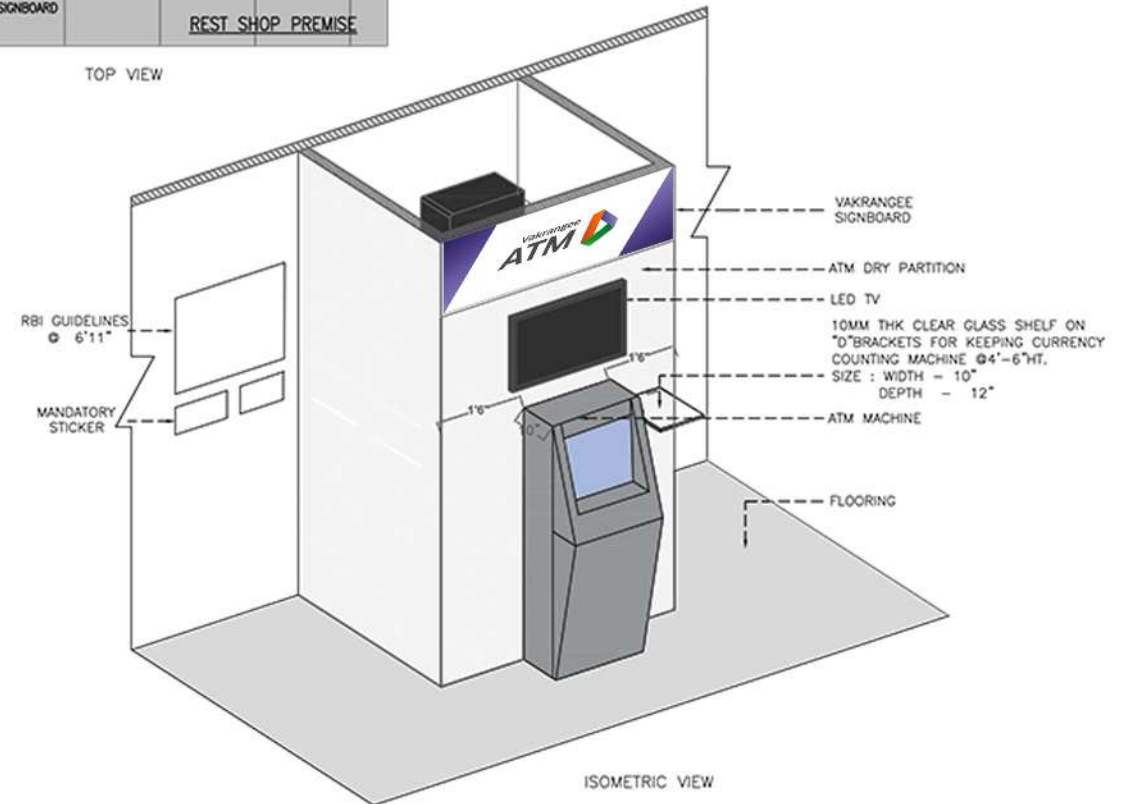

ISOMETRIC VIEW

Drawings | ATM Cabin - Furniture and Finishing Details


ATM CABIN TOP VIEW

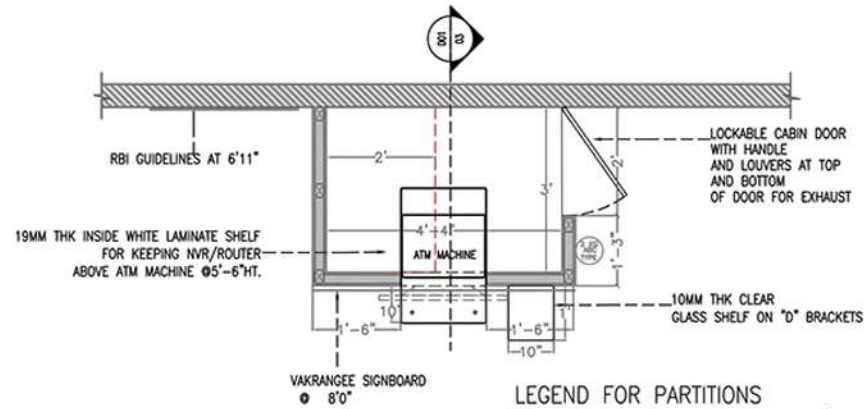

LEGEND FOR PARTITIONS


	EXISTING WALL
	50 TO 65MM THK. DRY PARTITION(UPTO TRUE SLAB)

ATM PARTITION FINISHES LAYOUT

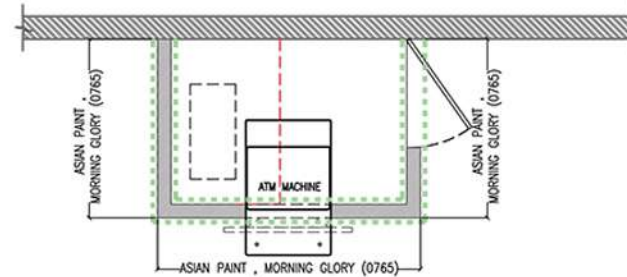


LEGEND OF FINISHES

SR.NO	FINISHES CODE	DESCRIPTION
1	PT-01	ASIAN PAINT , MORNING GLORY (0765).

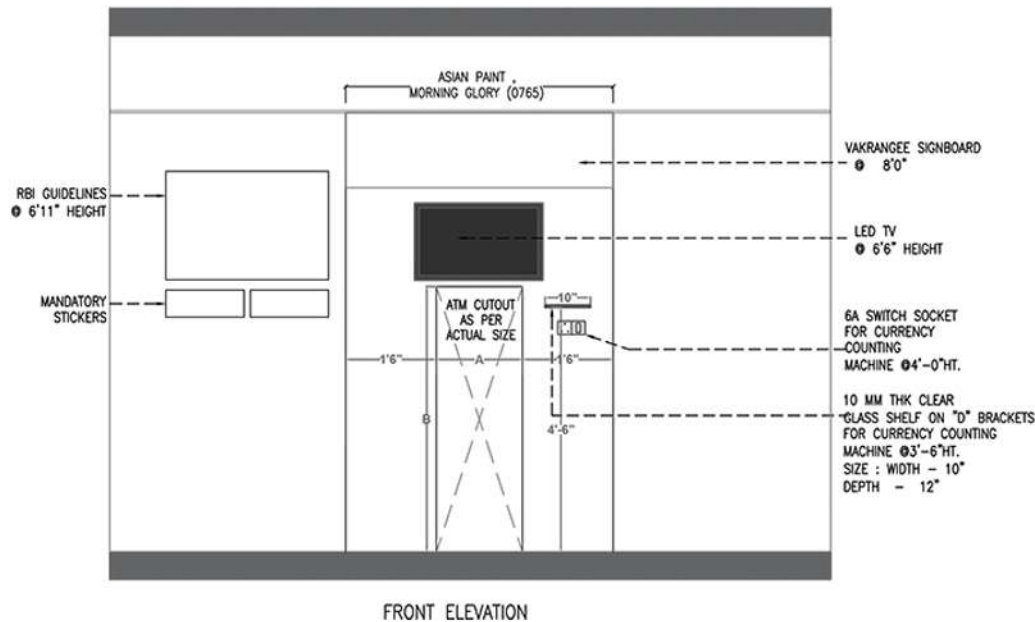


FRONT ELEVATION

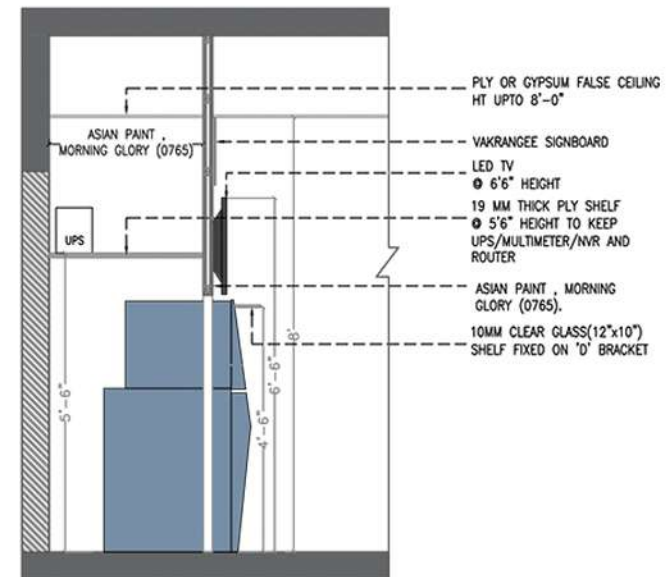

SECTIONAL ELEVATION 4

Drawings | ATM Cabin - Electrical Layout and CCTV Camera installation

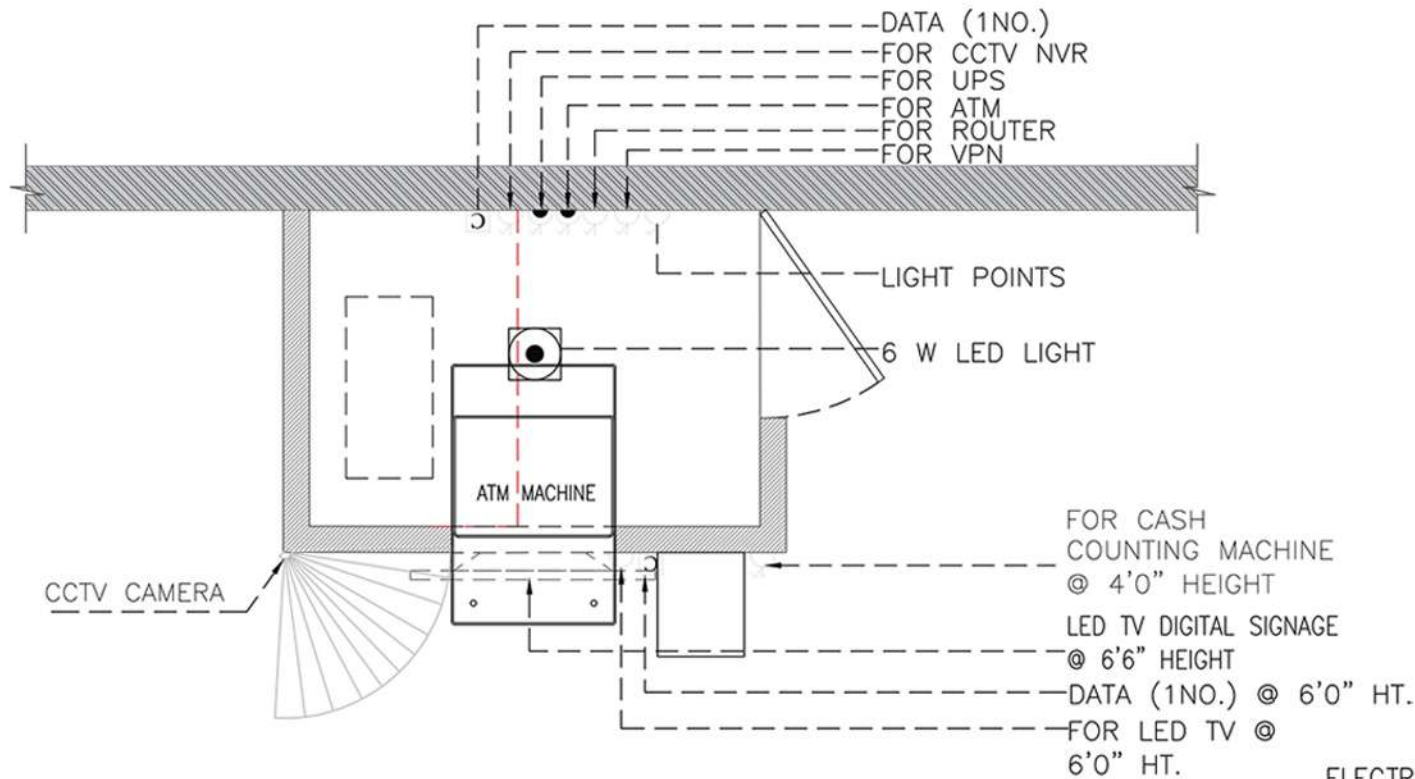

**Please ensure Earthing
Voltage - 0V to 3V.**

NOTE -

- Option A - CCTV Camera location will be on ATM partition at 8 feet Height
- Option B - CCTV Camera location will be at ceiling Height of max. 10 feet.
- Please ensure that cash counting process should be carried out in such a way that it is covered in the CCTV recording.


ATM EARTHING VIDEO LINK -

https://vkms.vakrangee.in/Downloads/D_?_=Earthing%20Video.zip

ELECTRICAL LEGEND:

	2/3 PIN 6A SWITCH SOCKET ON RAW POWER @ 4'0"
	3/3 PIN 6/16A SWITCH SOCKET ON UPS @ 4'0"
	DATA OUTLET (CAT 6)
	SWITCH @ 1200m/4' FROM FFL-ANCHOR ROMA ROMA CLASSIC/ ANCHOR PENTA MODULAR WHITE PLATES
	2 kg ABC FIRE EXTINGUISHER AT 900mm/3' FROM FFL
	CCTV CAMERA @ CEILING HT LVL

Drawings | ATM Cabin - Signage Layout

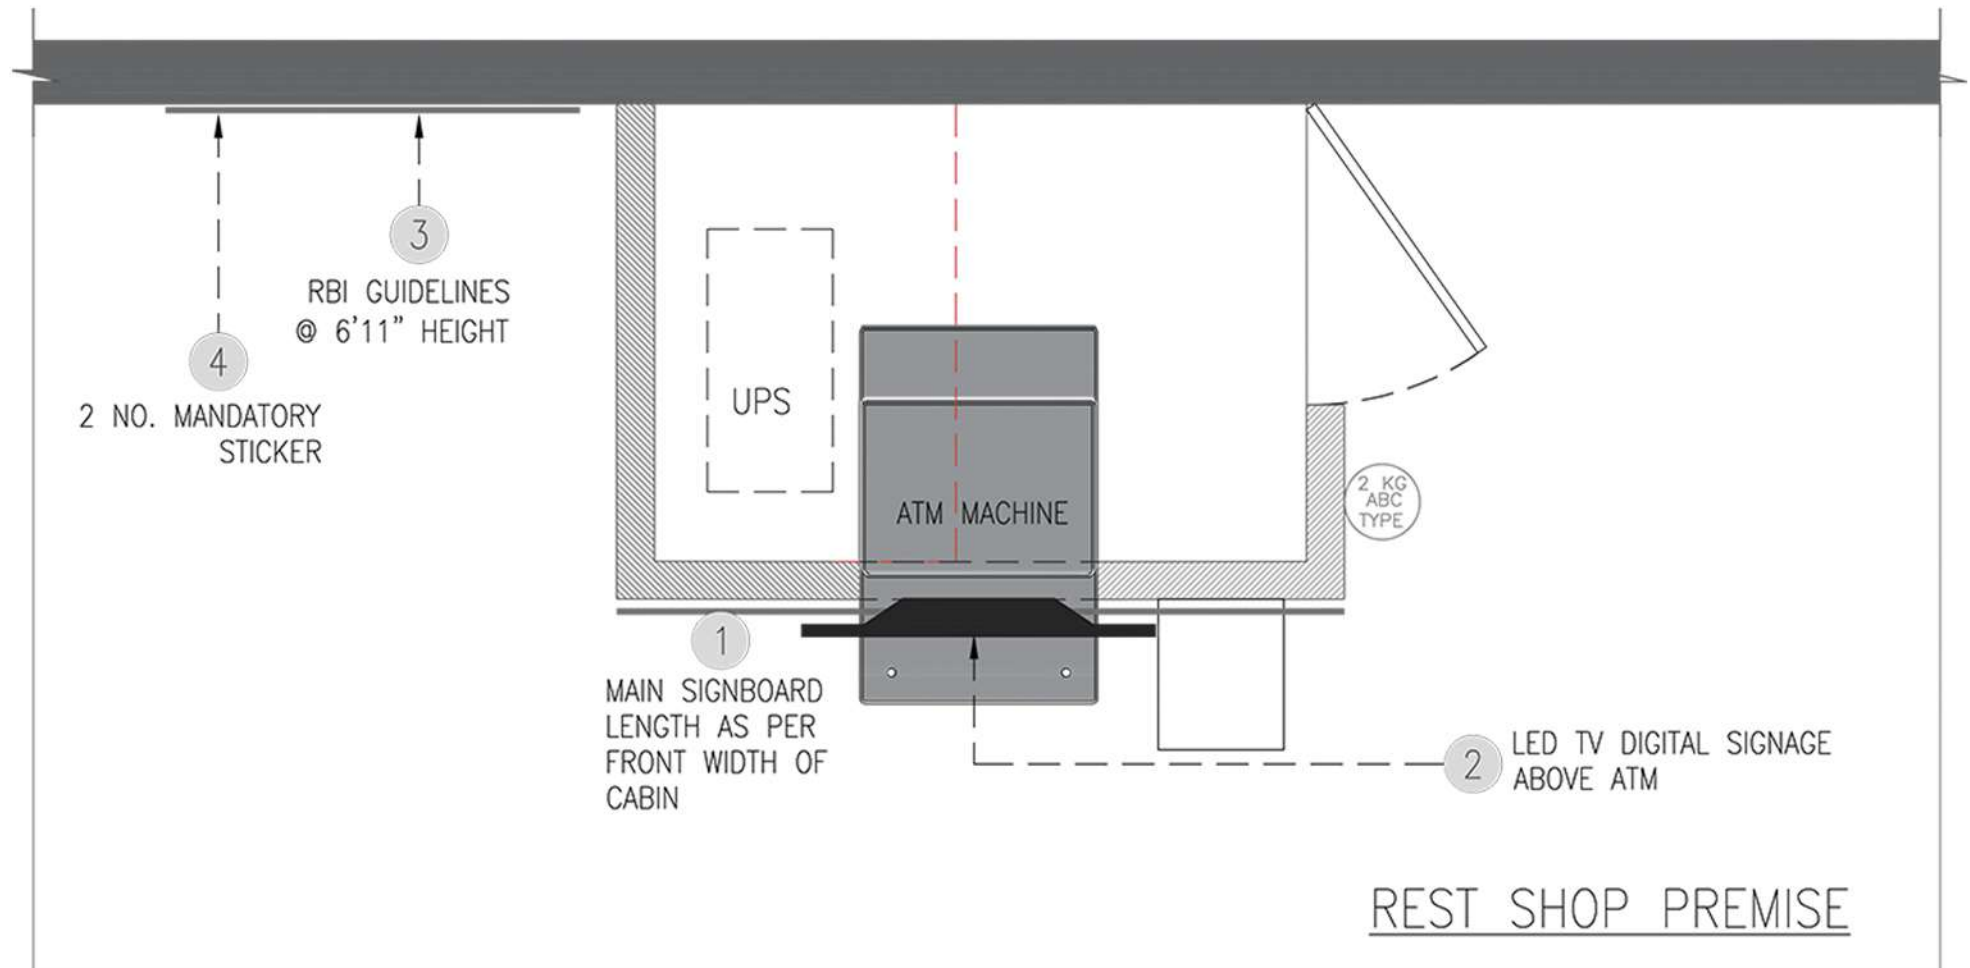


Important Instructions

Sr.No	ITEMS/ELEMENTS	DESCRIPTIONS
1	Ceiling - White Colour	First Option Preferred - (2 ft X 2 ft) Grid ceiling Second Option - gypsum ceiling Third Option - Concrete Slab ceiling
2	Main Entrance Glass Partition	First Option Preferred - Clear Glass - Toughened 8mm thick (Preferred) Second Option - Clear Glass - Non Toughened 12mm thick
		Aluminium Frame for Glass Partition Option 1 - Dark Grey, Black or white Option 2 - Natural Aluminium finish
		Main Entrance Glass Door Width should be minimum 3 ft. Entrance glass door to open outside of kendra (Preferred)
3	Electrical wiring	To be concealed (underground) - only switch board to be visible Open wiring / casing - Not allowed
4	ATM - AC Voltage Parameters and Earthing	P - N = 230v to 250v N - E = 0 to 3v Please refer Page no - 42 for Earthing Diagram P - E = 230v to 250v
5	CCTV Cable Data Cable	CAT 6 CABLE - Provide approx 1 meter extra length for CCTV
6	Rolling Shutter	Finished with white synthetic enamel paint
7	ATM Lollipop	Mandatory. Franchisee's can opt for additional locations apart from as shown in Design Manual Page no. 37.
8	UPS	<ul style="list-style-type: none"> • Minimum 1 KVA - To be procured by the Franchisee. with 30 minute power backup ; higher power backup set is preferable. • NVR, Router and ATM to be connected on UPS power. • ATM should always remain on. Incase the ATM needs to be switched off for any special reason, the ATM shutdown process should be followed strictly..
9	Digital Multimeter	To be procured by the Franchisee to record the Earthing Voltage. Earthing Measurement Video Link is provided on Page no. 12, 23, 33
10	RBI Guideline Poster	For Kendra without RAMP use Artwork (3-A) in Page no. 46, For Kendra with RAMP use Artwork (3-B) in Page no. 46,
11	RAMP	For Construction of RAMP, refer Page no. 40 in Design manual
12	Cash counting Machine	'Please ensure that cash counting process should be carried out in such a way that it is covered in the CCTV recording' Post cash counting process, machine can be kept in the ATM cabin above shelf
13	ATM Cabin Door	Please ensure proper door locking arrangements. Page no. 14,25,35 and 48.
14	Exhaust Fan / Air Conditioner	To maintain correct room temperature. Please provide either Air conditioning or exhaust fan

Covid - 19 Guidelines

06

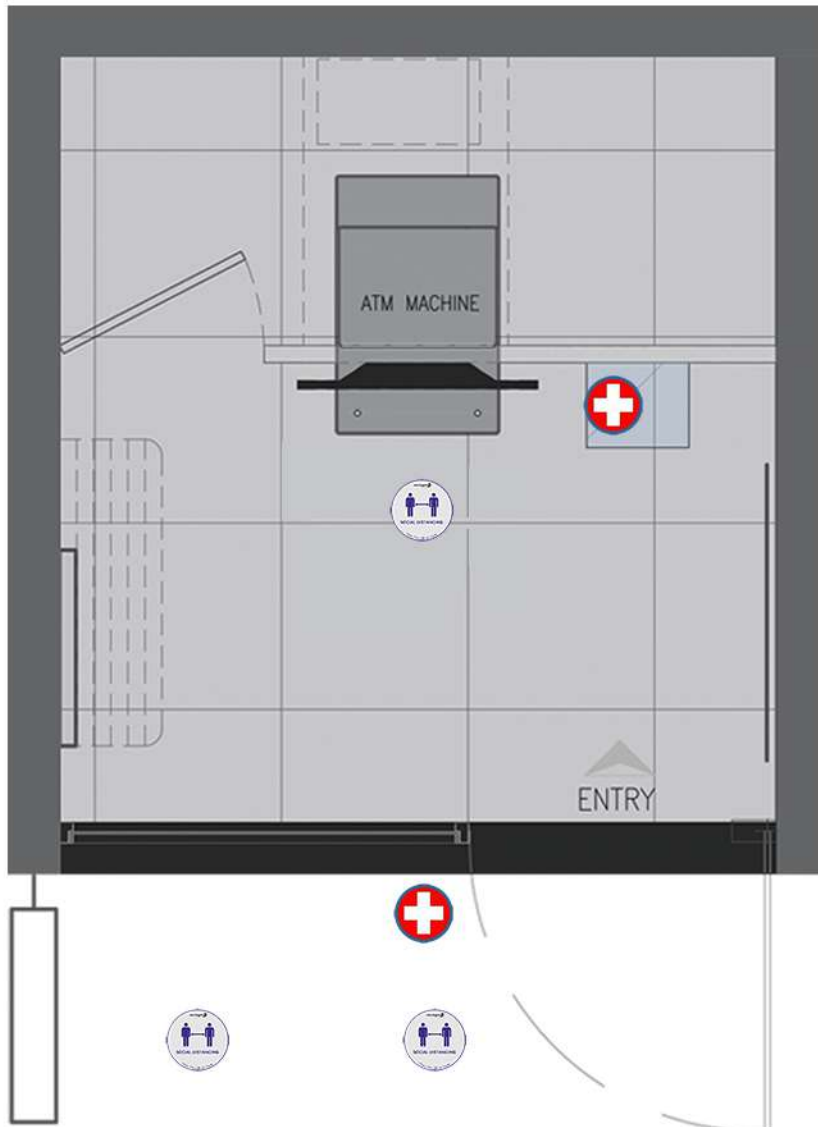

SANITIZING STATION

1. Outside of Entrance Door
2. Near ATM

Is hand sanitizer effective against COVID-19 ?

Ans. The best way to prevent the spread of infections and decrease the risk of getting sick is by washing your hands with plain soap and water, advises the

Ministry of Health and Family Welfare (MoHFW).

Washing hands Often with soap and water for at least 20 seconds is essential, especially after going to the bathroom; before eating; and after coughing, sneezing, or blowing one's nose. If soap and water are not available, **MoHFW** recommends consumers use an alcohol-based hand sanitizer that contains at least 70% alcohol



SOCIAL DISTANCING

- Please Keep minimum 6 Feet distance.
- Do not shake hands with anyone
- Avoid touching door handles.
- Always wear mask
- Observe discipline

Case study



Maintenance Guidelines - For Kendra Interior and Branding Elements.

Franchisees are advised to follow the Maintenance Guidelines for ensuring intended life of the elements and also to keep them in good order and conditions

1. Main Sign Board:

- 1-Once in a month Clean with Mild Soap water using soft cloth.
- 2- In case of Bird shit or any other issue clean immediately with mild soap and water.

2. Vinyl / Sunboard Posters:

- 1- Once in Fortnight clean with mild soap water using soft cloth. Do not use brush or coarse material.
- 2- If corners are lifted up or become loose then use feviquick or any instant adhesives to fix it immediately.

3. Floor Mat/Vitrified Tiles:

Weekly cleaning using mild soap water or as and when required.

4. Wall Paint:

Monthly cleaning with soft wet cloth in case of Distemper or Oil paint.

5. Door Glass

Clean Glass regularly using glass cleaning liquid.

6. LED lights:

Regular cleaning with soft wet cloth.

7. Door Mat:

Regular cleaning by dipping in 1% Sodium Hypochlorite.

Advisable:

- 1- Disinfect daily whole Kendra using approved disinfectants.
- 2- Do regular pest control of Kendra.

For any Technical queries regarding Design Manual Please Contact		
Name	Contact No.	Email id
Mr. Nishant Jadhav	7045996119	nishant.jadhav@vakrangee.in
Mr. Dhaval Joshi	8879047379	dhavalj@vakrangee.in
Mr. Jitendra Pawar	8291635061	jitendra.pawar@vakrangee.in

Vakrangee Limited
Vakrangee Corporate House, Plot No.93, Road No.16,
MIDC Marol, Andheri (East), Mumbai - 400 093.
Telephone No. +91 22 67765100
www.vakrangee.in

Thank You

| www.vakrangee.in |

Copyright : This document is copyright and its contents confidential. It cannot be reproduced and given to the third parties without the written consent of Vakrangee Ltd.