



VAKRANGEE ONLY ATM
Version 01 | 2023


Content

What is a Vakrangee ATM	03
Drawings	04-45
Placement of Equipments	46
Marketing element and Signage	47
Design Guideline for Shop - in - Shop ATM Installation	49
Covid - 19 Guidelines	55
Maintenance Guidelines	57

What is Vakrangee ATM

Minimum carpet area for a Vakrangee ATM : Minimum 30 sq.ft

Minimum components : ATM

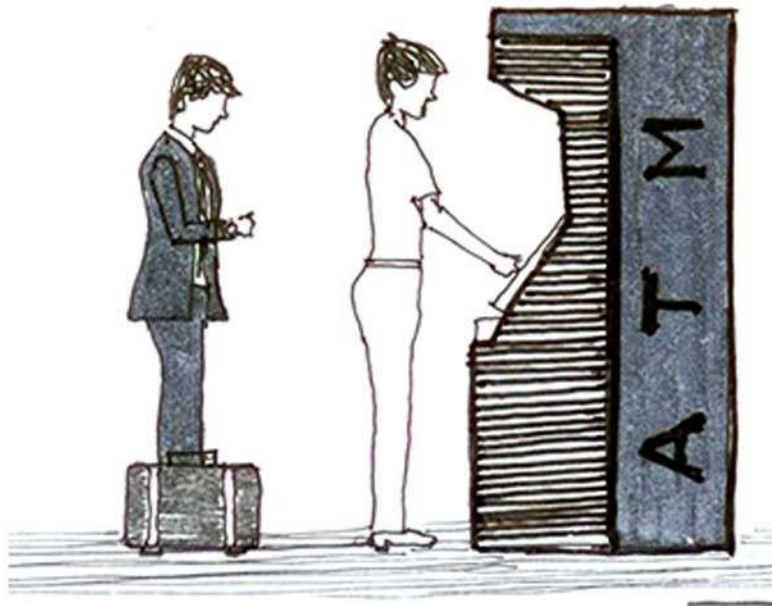

ATM

- Cash withdrawal
- Balance enquiry, Pin change, Mini statement.
- Value added services – Aadhar seeding, statement request, card to card fund transfer, cheque book request, mobile banking registration

drawings

03

Format Rectangular Vertical

drawings

List of content

- General arrangement plan

- Top View
- Front Elveion

- Interior Lineout
- Flooring layout

- Wall finishes layout
- RCP & Elec. power layout

- Signage layout
- Internal elevations


Renders | Rectangular Vertical format – Top View



Renders | Rectangular Vertical format – Front View





Drawings | Rectangular vertical format - General arrangement plan

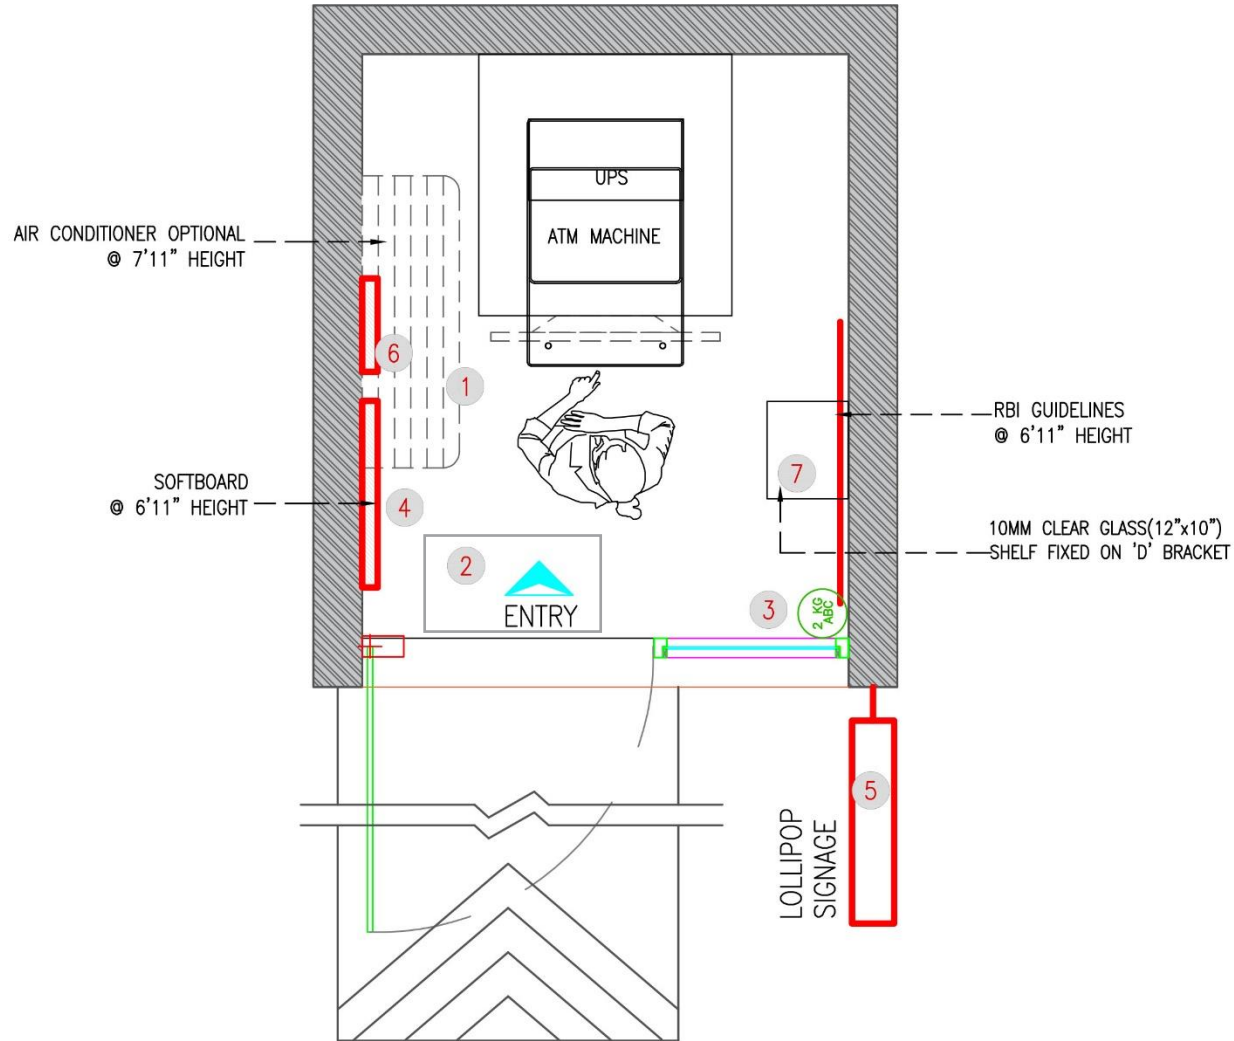


FURNITURE PLACEMENT (TO BE DONE BY FRANCHISEE)


Sr. No.	Items.	Qty.
1	Air Conditioner / Fan	Optional
2	Doormat	1
3	Fire Extinguisher	1
4	Soft Board A2 Size	1
5	ATM Lollipop Signage	1
6	Franchisee Certificate	1
7	Sanitizing station	As Per Requirement

Renders | Rectangular vertical format - Top View and Isometric View

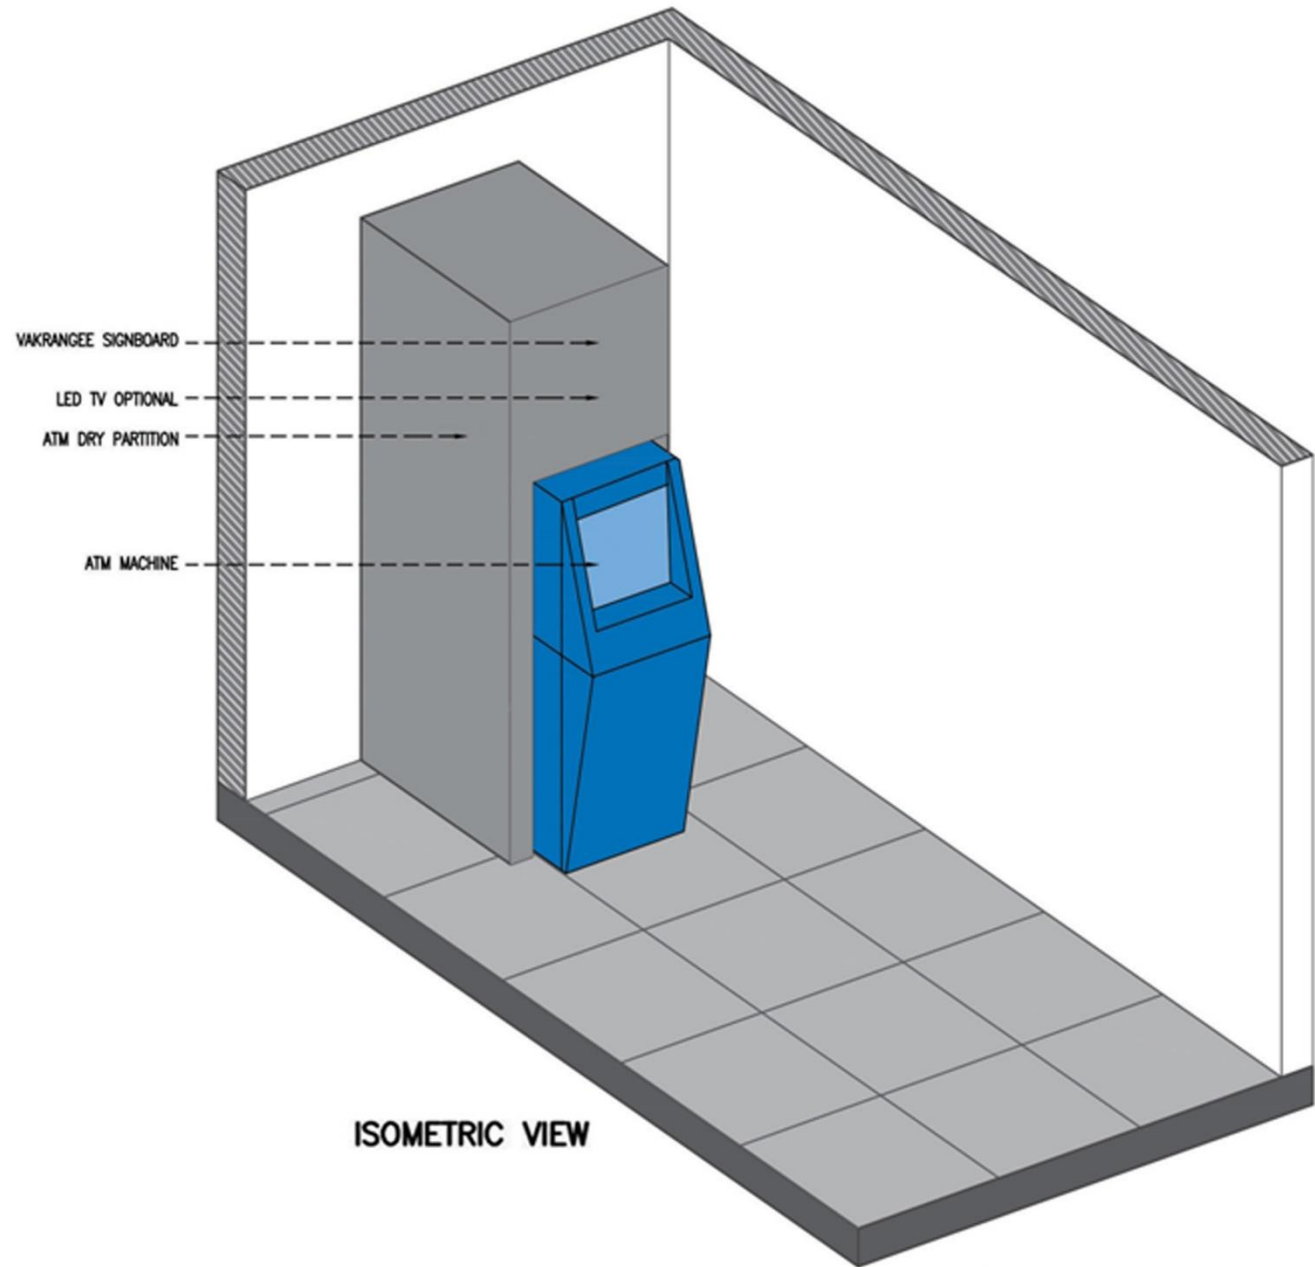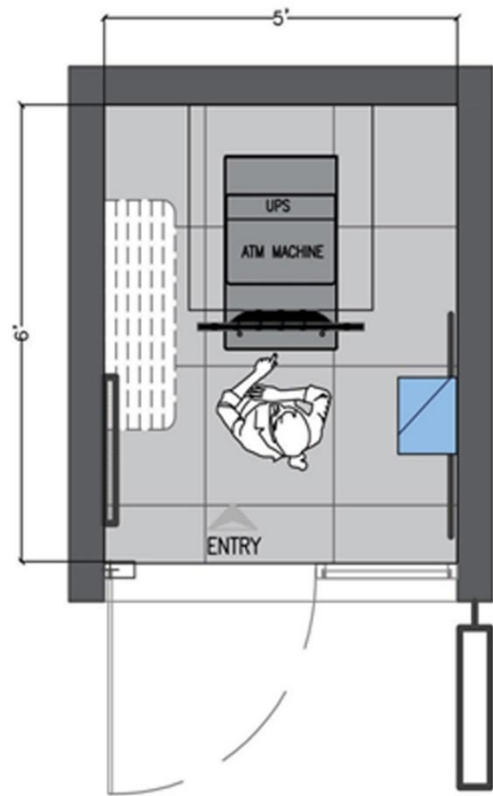

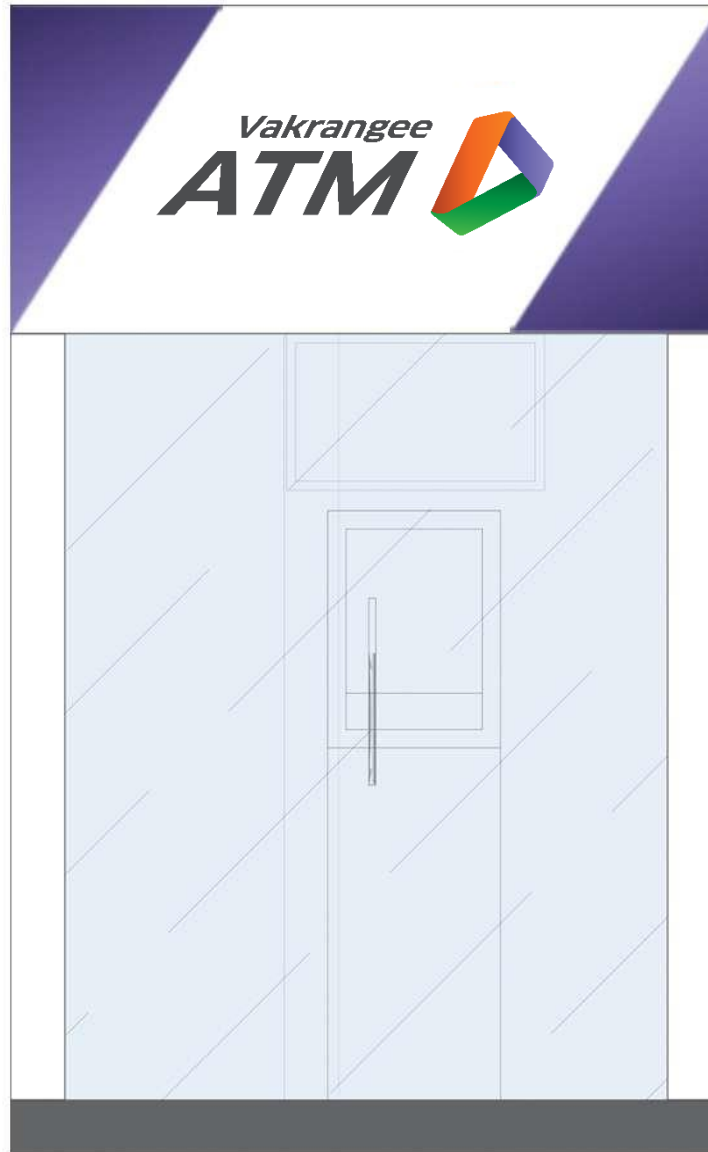

Drawings | Rectangular vertical format - Interior Lineout

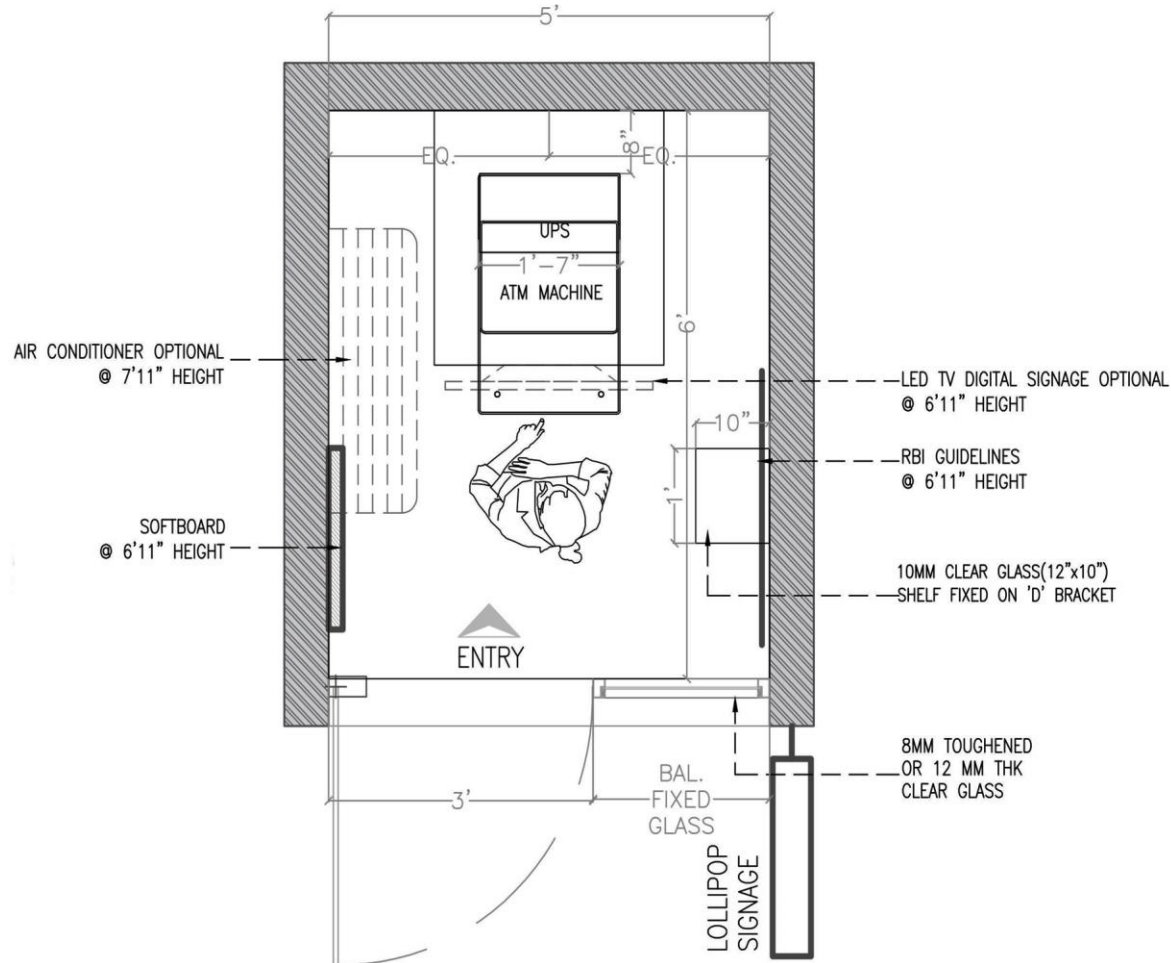

FIXED GLAZING SPECIFICATIONS


STRUCTURAL OPENING (UNFINISH TO UNFINISH)	SILL FROM FFL (IN MM)	LINTEL FROM FFL (IN MM)	WIDTH (IN MM)	HEIGHT (IN MM)	NOS.
WFGL 01	00	2150	AS PER SITE	AS PER SITE	1





DOOR SPECIFICATIONS

STRUCTURAL OPENING (UNFINISH TO UNFINISH)	WIDTH (IN MM)	HEIGHT (IN MM)
SERVICE AREA		
D1.01.01	900	2150

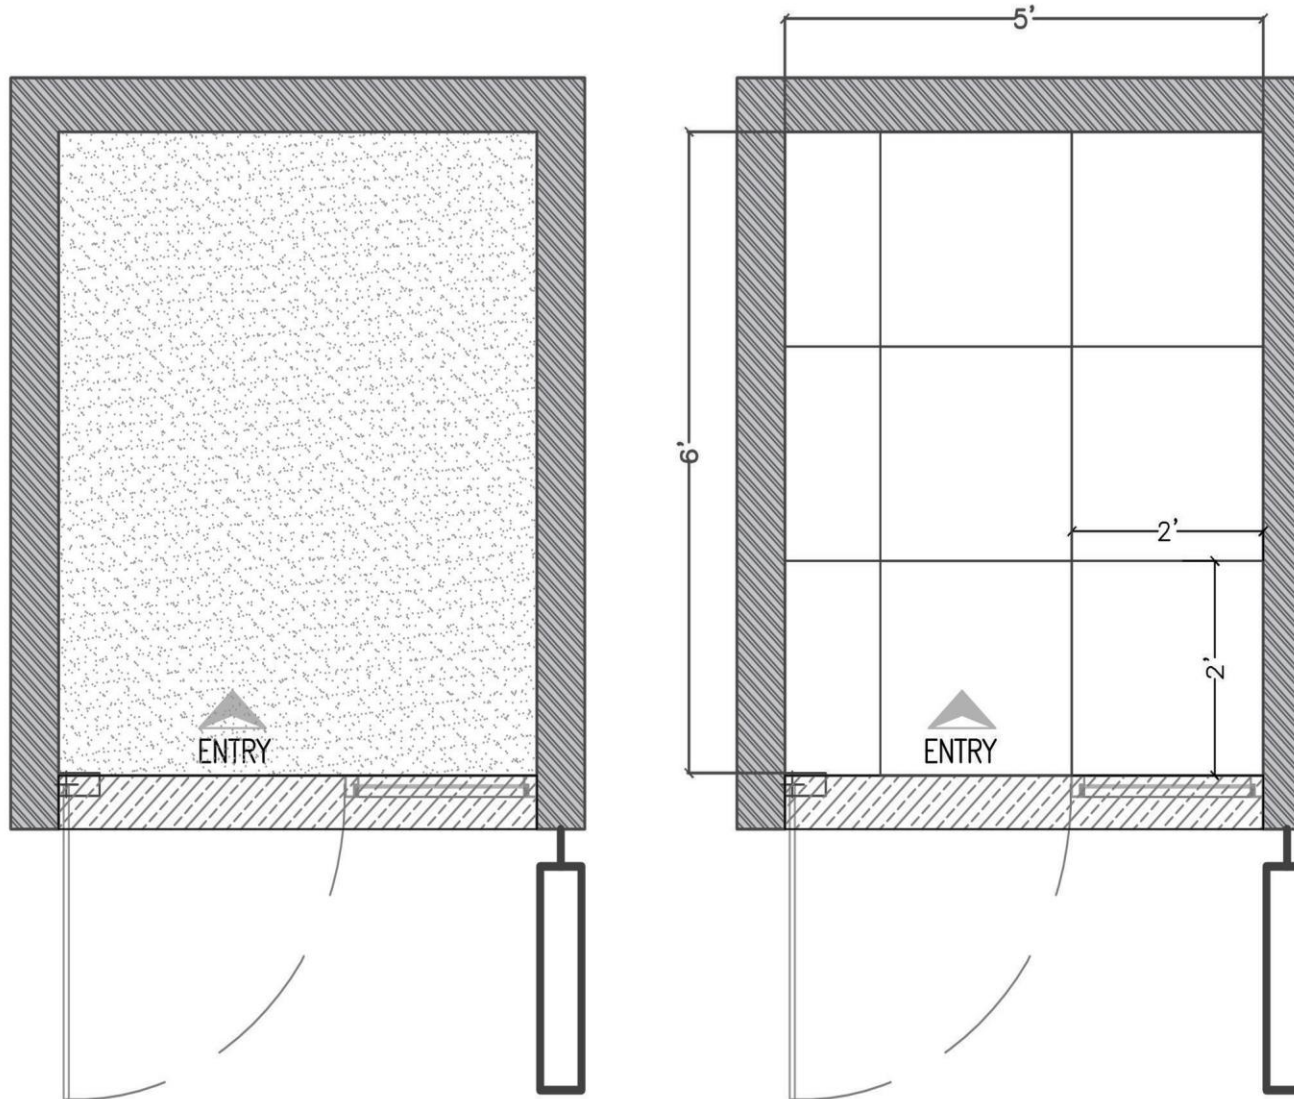
- DOOR HT. IS GIVEN CONSIDERING 50MM SCREED AND FLOOR TILE.
- ALL DOOR FINISHED HEIGHT TO BE 2100MM



Drawings | Rectangular vertical format - Flooring layout





LEGEND		
SYMBOL	SPECIFICATION	MAKE
	F01 ESCARA LIGHT GREY (600X600)	SOMANY CERAMICS
	F02 VINYL FLOORING- ROLL FORM GENTLY GREY (K822-001)	ARMSTORNG
	GN1 GRANITE	
	SK-01 75MM HIGH SKIRTING SAME AS FLOOR TILES (FOR VINYL FLOORING AND TILES FLOORING)	

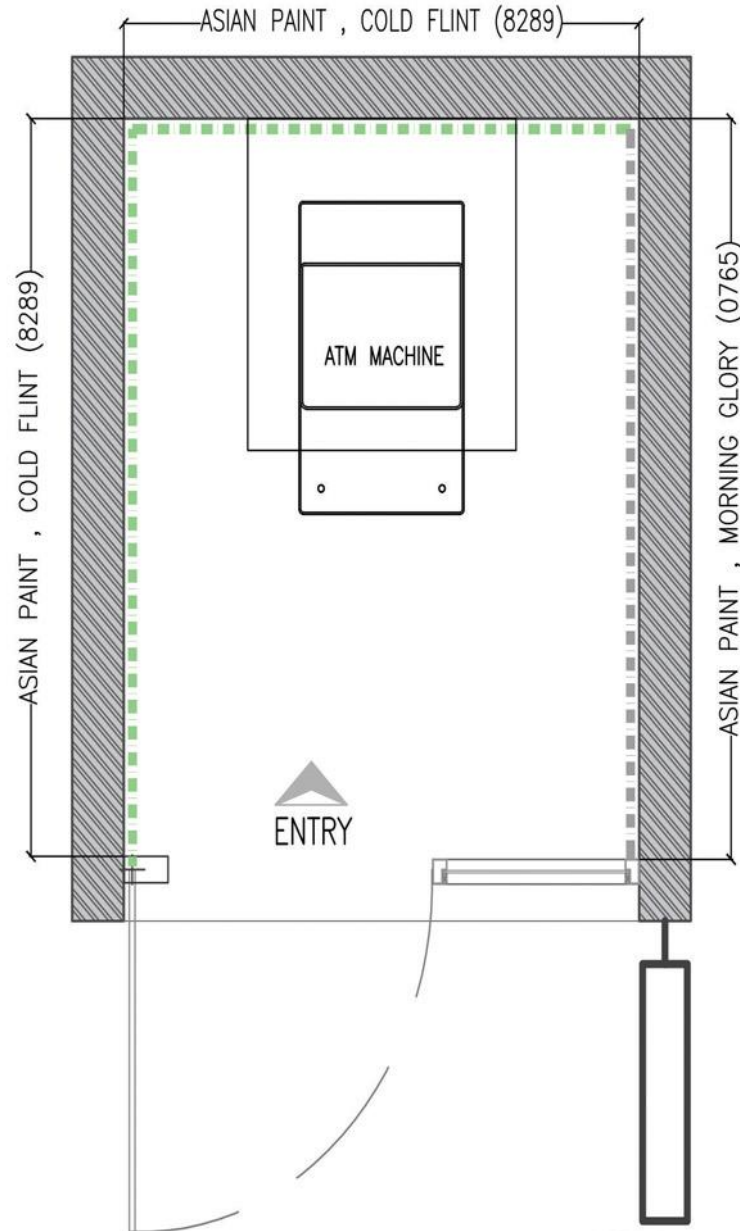

Drawings | Rectangular vertical format - Wall finishes layout

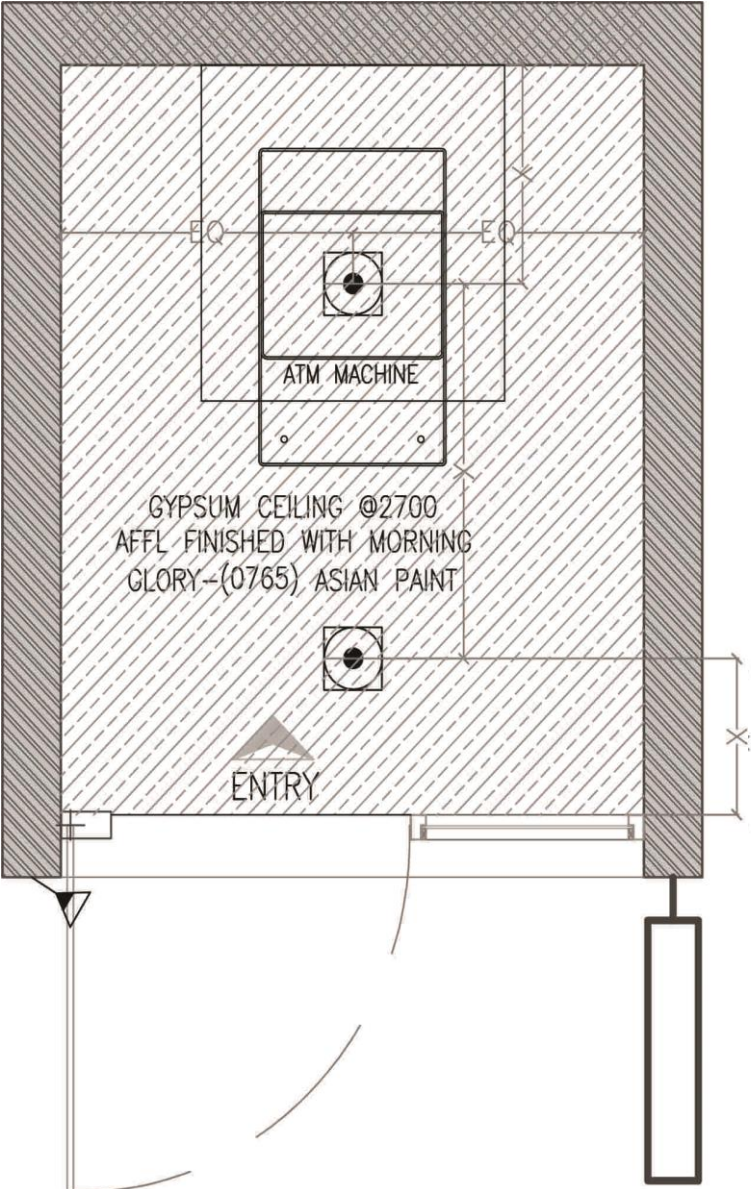


LEGEND OF FINISHES			
SR.NO	FINISHES CODE	DESCRIPTION	
PAINT			
1	PT-01 ■■■■■	ASIAN PAINT , MORNING GLORY (0765).	
2	PT-02 ■■■■■	ASIAN PAINT , COLD FLINT (8289).	



CEILING FINISHES LEGEND	
REF.	FINISHES
	GYPSUM CEILING @2700 AFFL FINISHED WITH MORNING GLORY--(0765) ASIAN PAINT

LIGHT FIXTURE LEGEND	
	150 W LED -BRIGHT WHITE -FOCUS LIGHT ABOVE EXTERNAL- MAIN SIGNAGE
	18 W RECESSED LED LIGHT 150X150

Drawings | Rectangular vertical format – RCP and Elec. power layout – CCTV Camera Installation 2/2

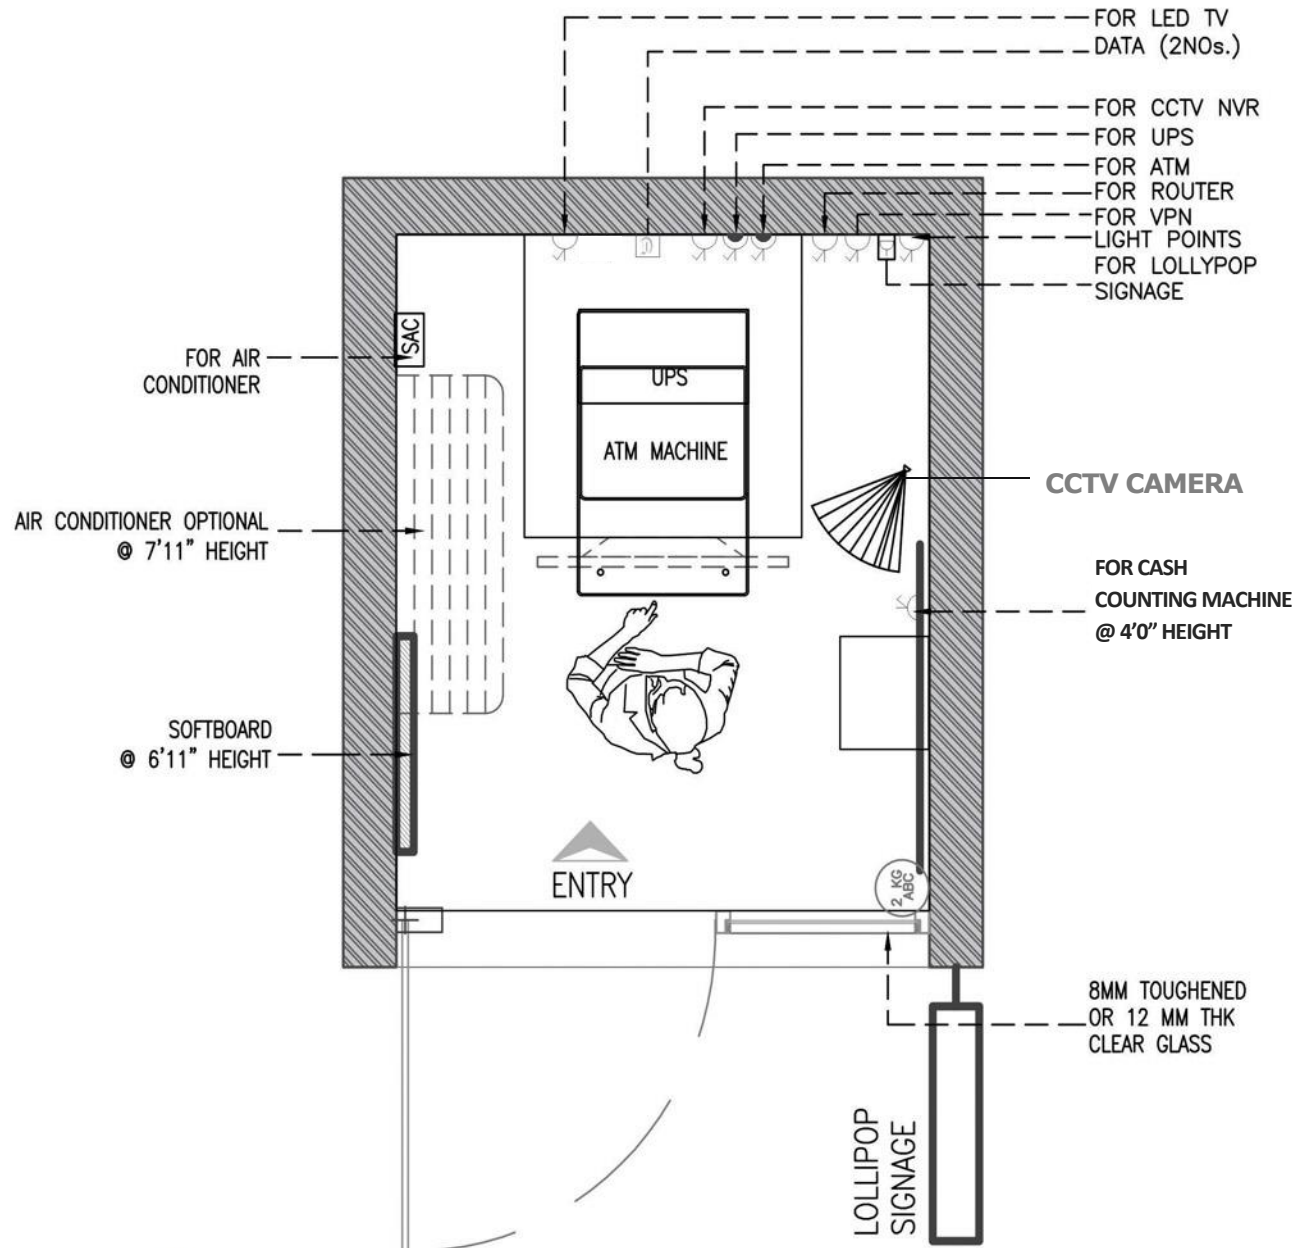


ELECTRICAL LEGEND:

	2/3 PIN 6A SWITCH SOCKET ON RAW POWER
	3/3 PIN 16A SWITCH SOCKET ON RAW POWER
	3/3 PIN 6/16A SWITCH SOCKET ON UPS
	2/3 PIN 16A SWITCH SOCKET EXTERNAL SIGNAGE
	DATA OUTLET (CAT 6)
	32A AC SWITCH @ 2100m/7' FROM FFL AND AC AT 2400mm/8' FFL
	AC UNIT AT 2400mm/8' FROM FFL
	SWITCH @ 1200m/4' FROM FFL-ANCHOR ROMA ROMA CLASSIC/ ANCHOR PENTA MODULAR WHITE PLATES
	2 kg ABC FIRE EXTINGUISHER AT 900mm/3' FROM FFL
	CCTV CAMERA @ CEILING HT LVL


Note - For Ramp Constructions Specification - Refer page number 42.

Drawings | Rectangular vertical format - Signage layout

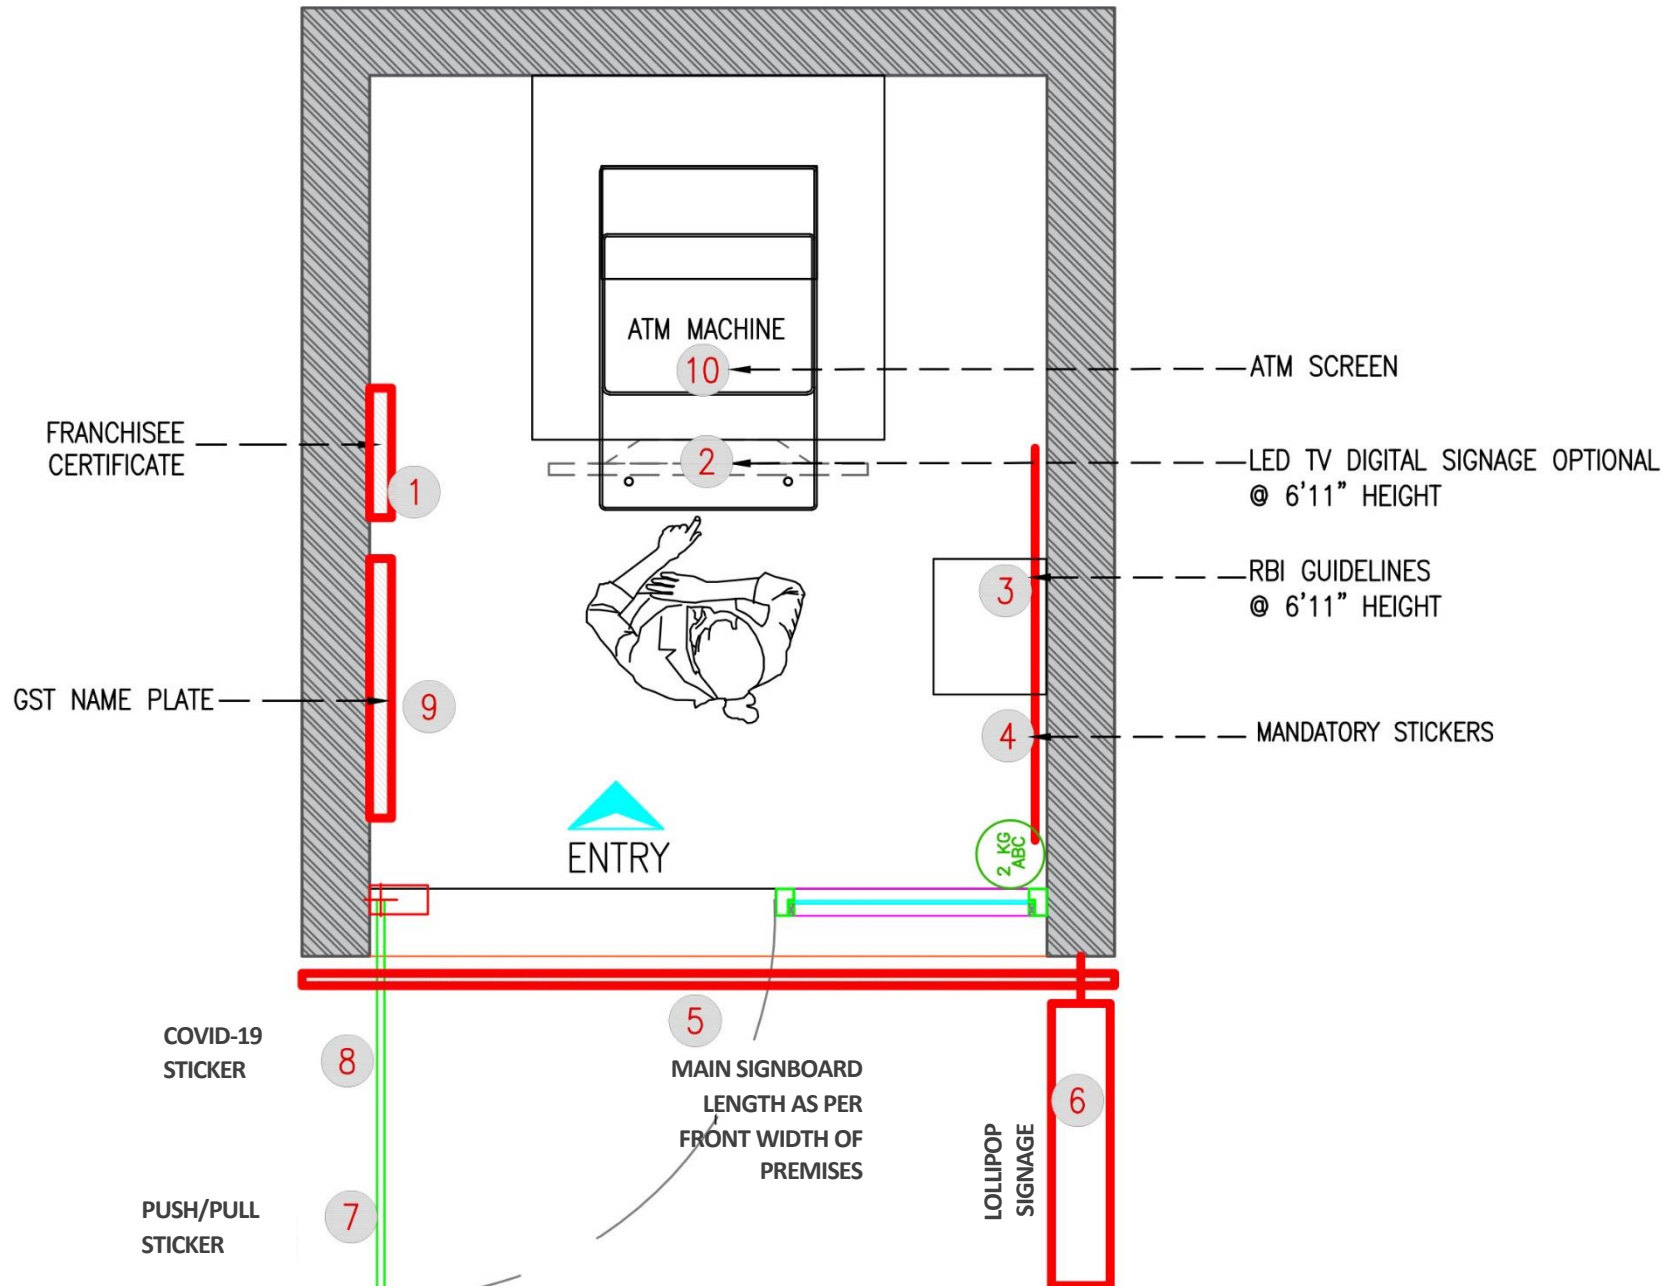


Note - Refer page number 48 for more details

Drawings | Rectangular vertical format - Internal elevations

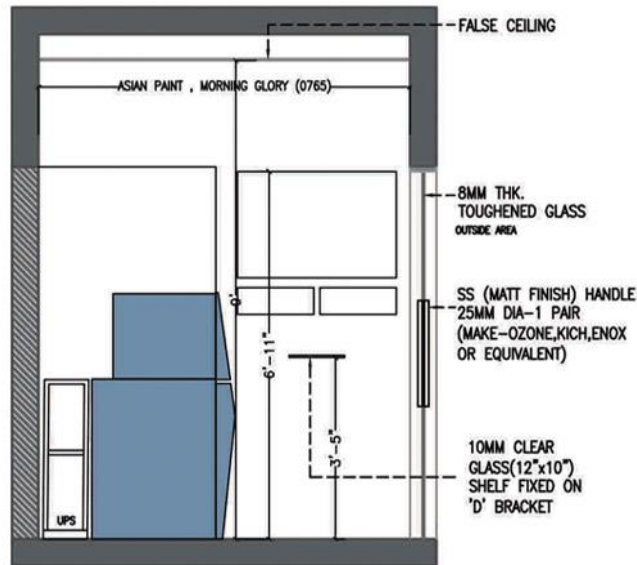


02
XIE-0101 1:50 INTERNAL ELEVATION - 02
GROUND FLOOR

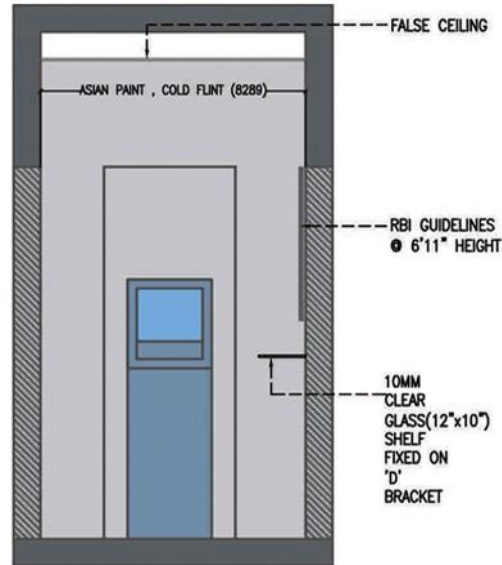


03
XIE-0101 1:50 INTERNAL ELEVATION - 03
GROUND FLOOR



04
XIE-0101 1:50 INTERNAL ELEVATION - 04
GROUND FLOOR

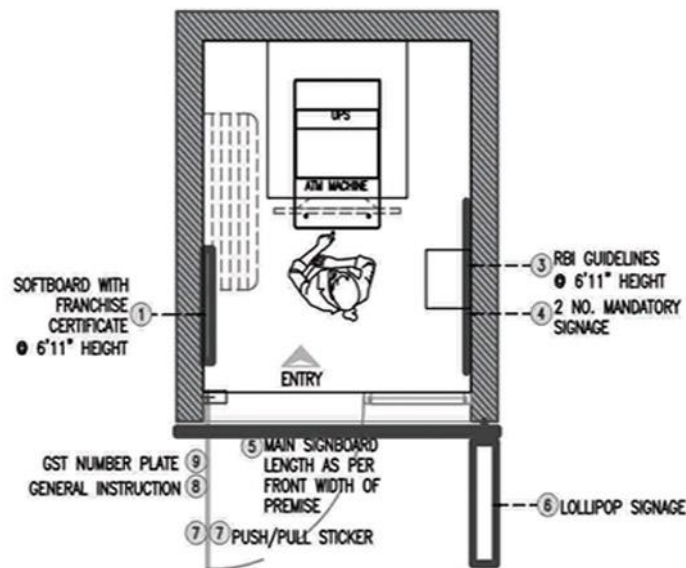

01
XIE-0101 1:20 GENERAL ARRANGEMENT PLAN
GROUND FLOOR

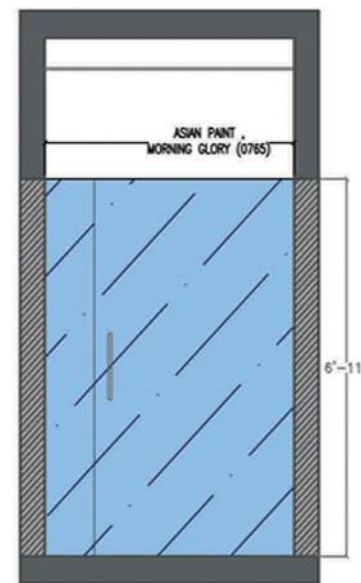

05
XIE-0101 1:50 INTERNAL ELEVATION - 05
GROUND FLOOR

Format Rectangular Horizontal

drawings

List of content

- General arrangement plan


- Top View
- Front Elveion

- Interior Lineout
- Flooring layout

- Wall finishes layout
- RCP & Elec. power layout

- Signage layout
- Internal elevations


Drawings | Rectangular horizontal format - General arrangement plan

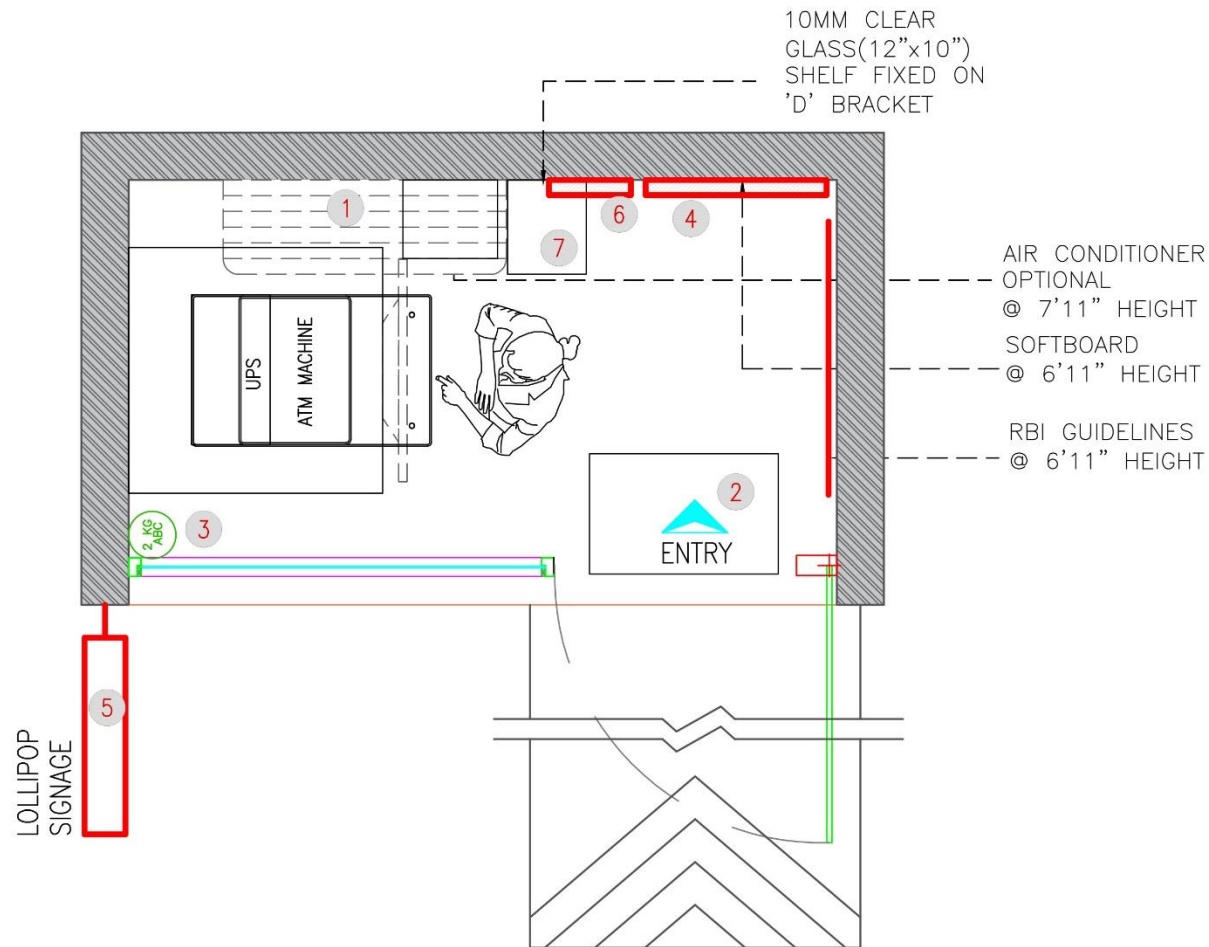


FURNITURE PLACEMENT (TO BE DONE BY FRANCHISEE)


Sr. No.	Items.	Qty.
1	Air Conditioner / Fan	Optional
2	Doormat	1
3	Fire Extinguisher	1
4	Soft Board A2 Size	1
5	ATM Lollipop Signage	1
6	Franchisee Certificate	1
7	Sanitizing station	As Per Requirement

Top View

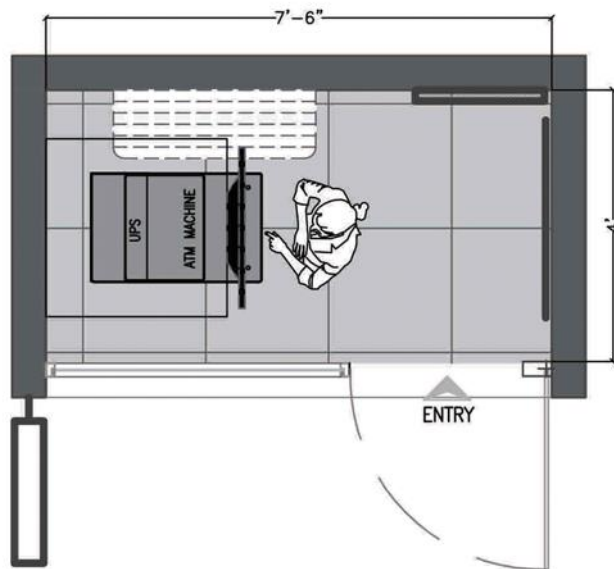


Isometric View

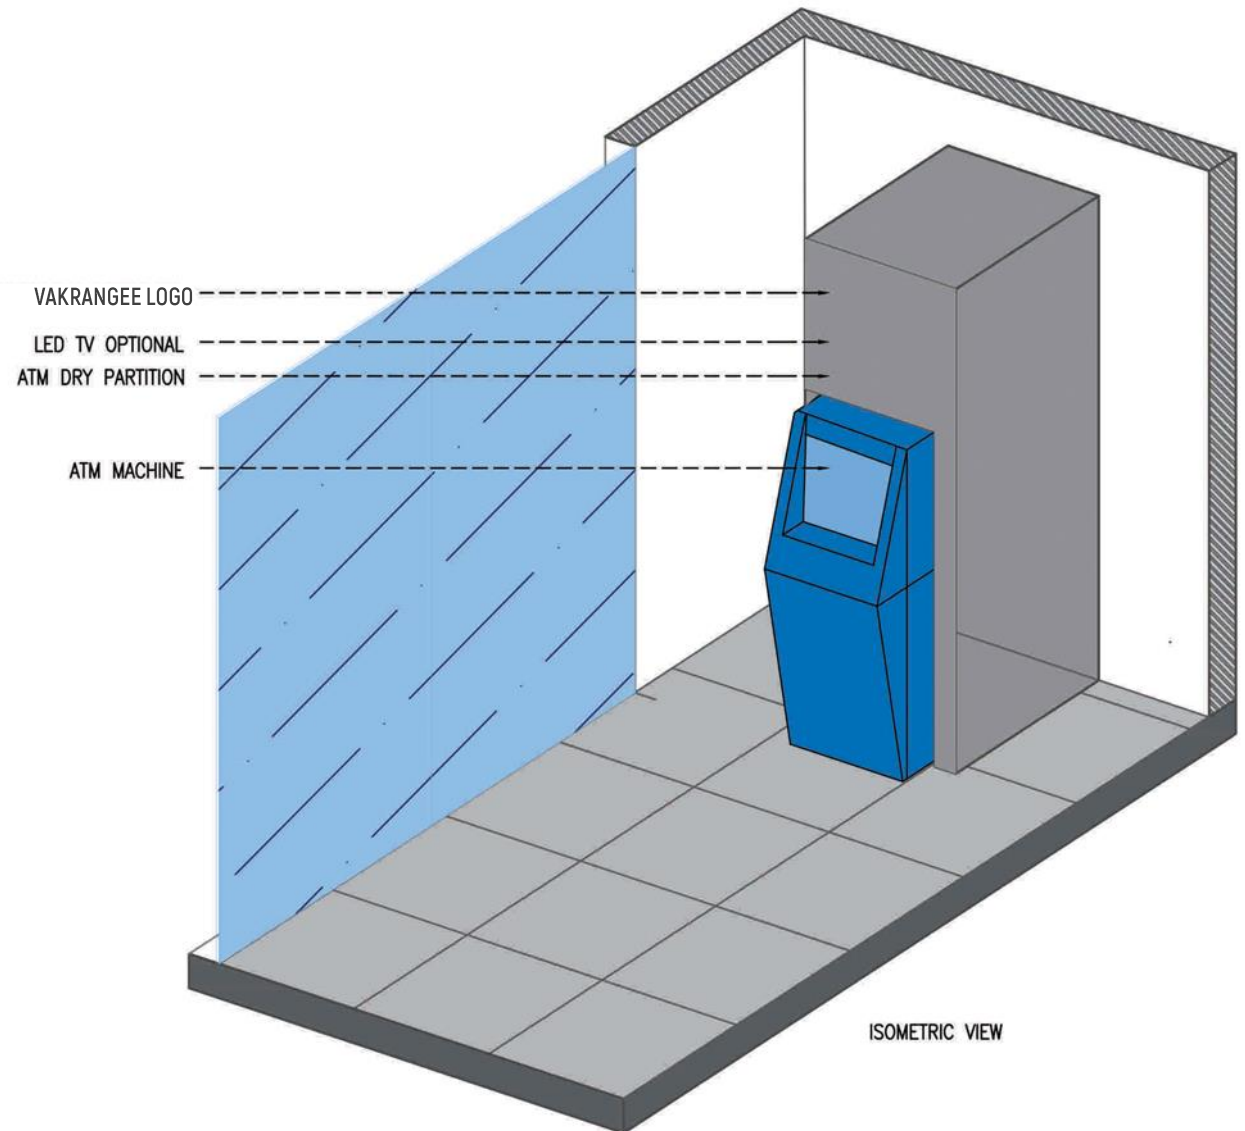

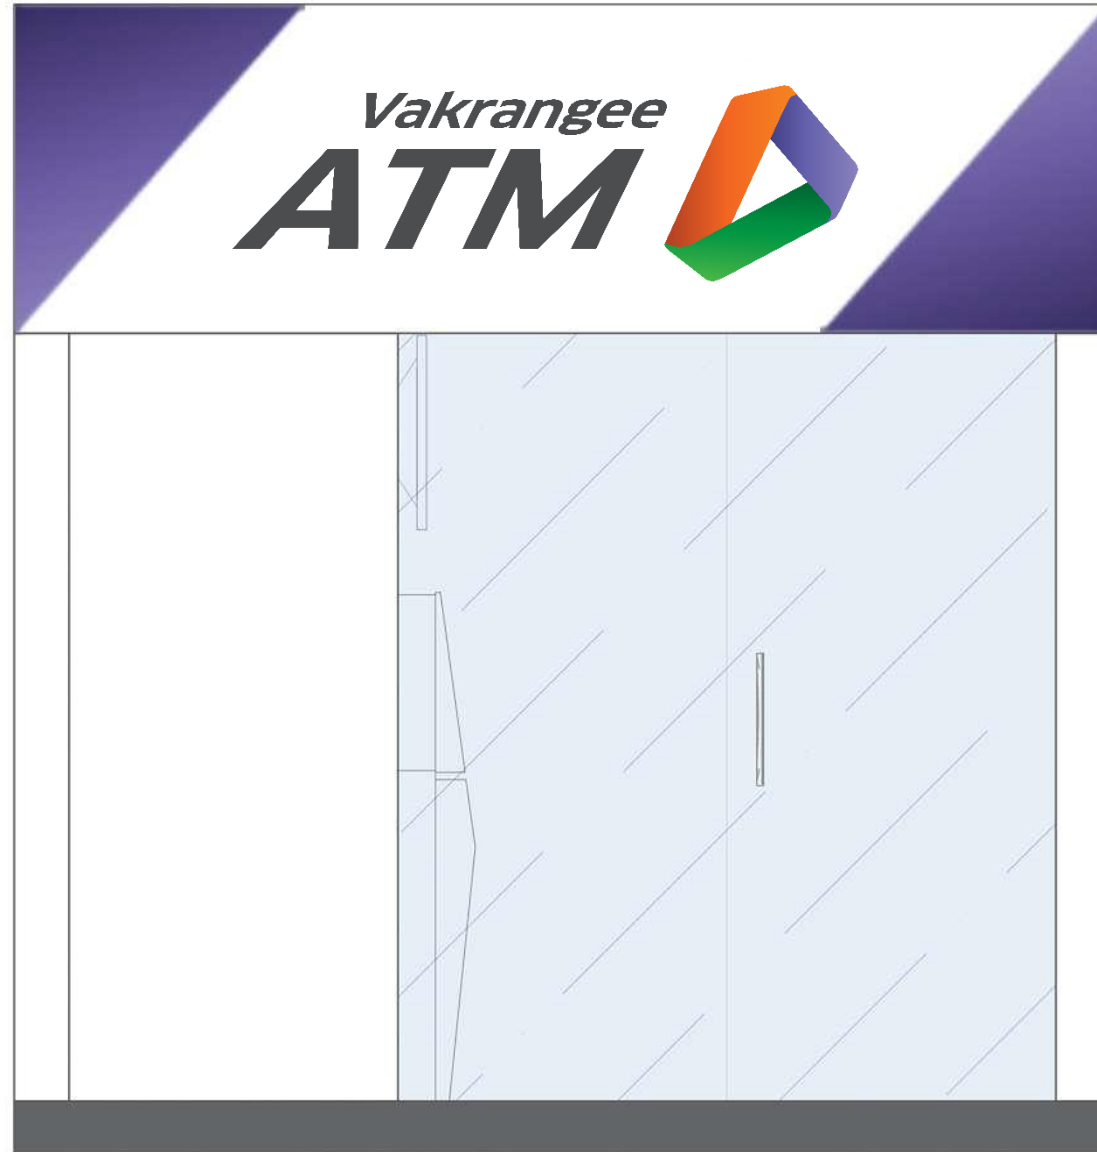

Drawings | Rectangular horizontal format - Interior Lineout

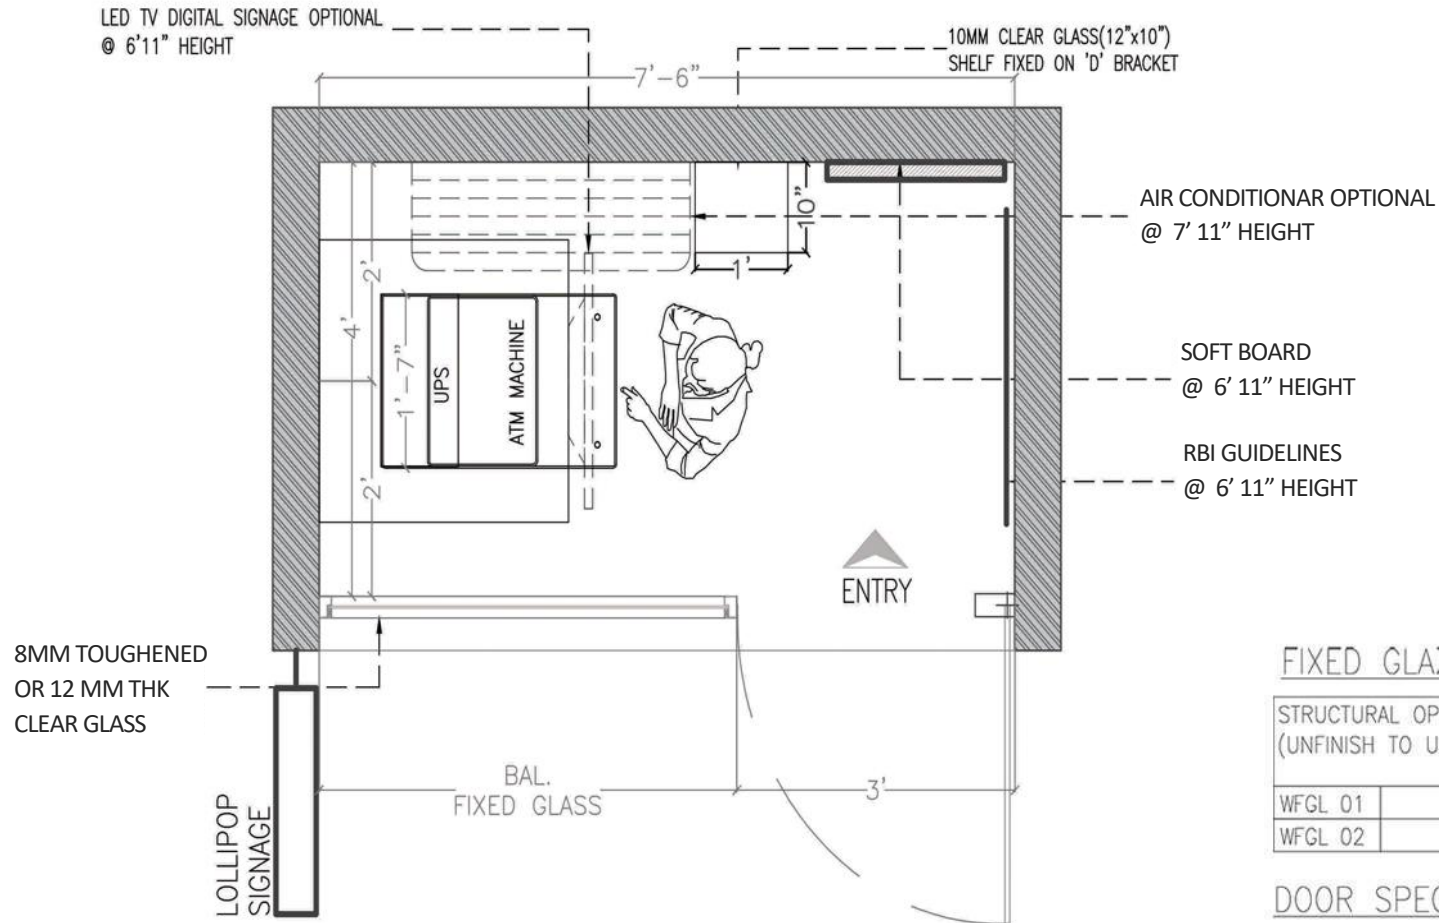

FIXED GLAZING SPECIFICATIONS


STRUCTURAL OPENING (UNFINISH TO UNFINISH)		SILL FROM FFL (IN MM)	LINTEL FROM FFL (IN MM)	WIDTH (IN MM)	HEIGHT (IN MM)	NOS.
WFLG 01		00	2150	AS PER SITE	AS PER SITE	1
WFLG 02		00	2150			1





DOOR SPECIFICATIONS

STRUCTURAL OPENING (UNFINISH TO UNFINISH)	WIDTH (IN MM)	HEIGHT (IN MM)
SERVICE AREA		
D1.01.01	900	2150


- DOOR HT. IS GIVEN CONSIDERING 50MM SCREED AND FLOOR TILE.
- ALL DOOR FINISHED HEIGHT TO BE 2100MM

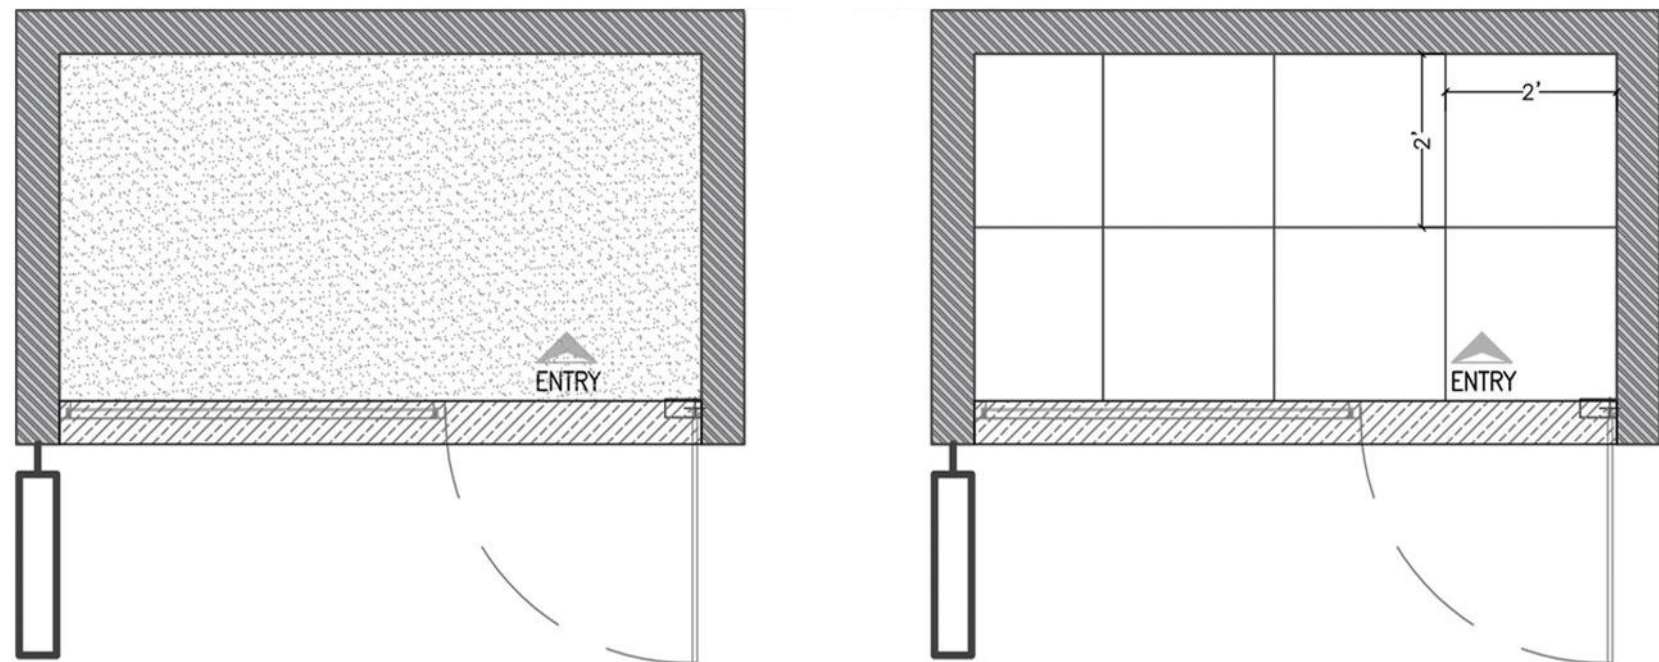

Drawings | Rectangular horizontal format - Flooring layout




LEGEND		
SYMBOL	SPECIFICATION	MAKE
	F01 ESCARA LIGHT GREY (600X600)	SOMANY CERAMICS
	F02 VINYL FLOORING- ROLL FORM GENTLY GREY (K822-001)	ARMSTORNG
	GN1 GRANITE	
	SK-01 75MM HIGH SKIRTING SAME AS FLOOR TILES (FOR VINYL FLOORING AND TILES FLOORING)	

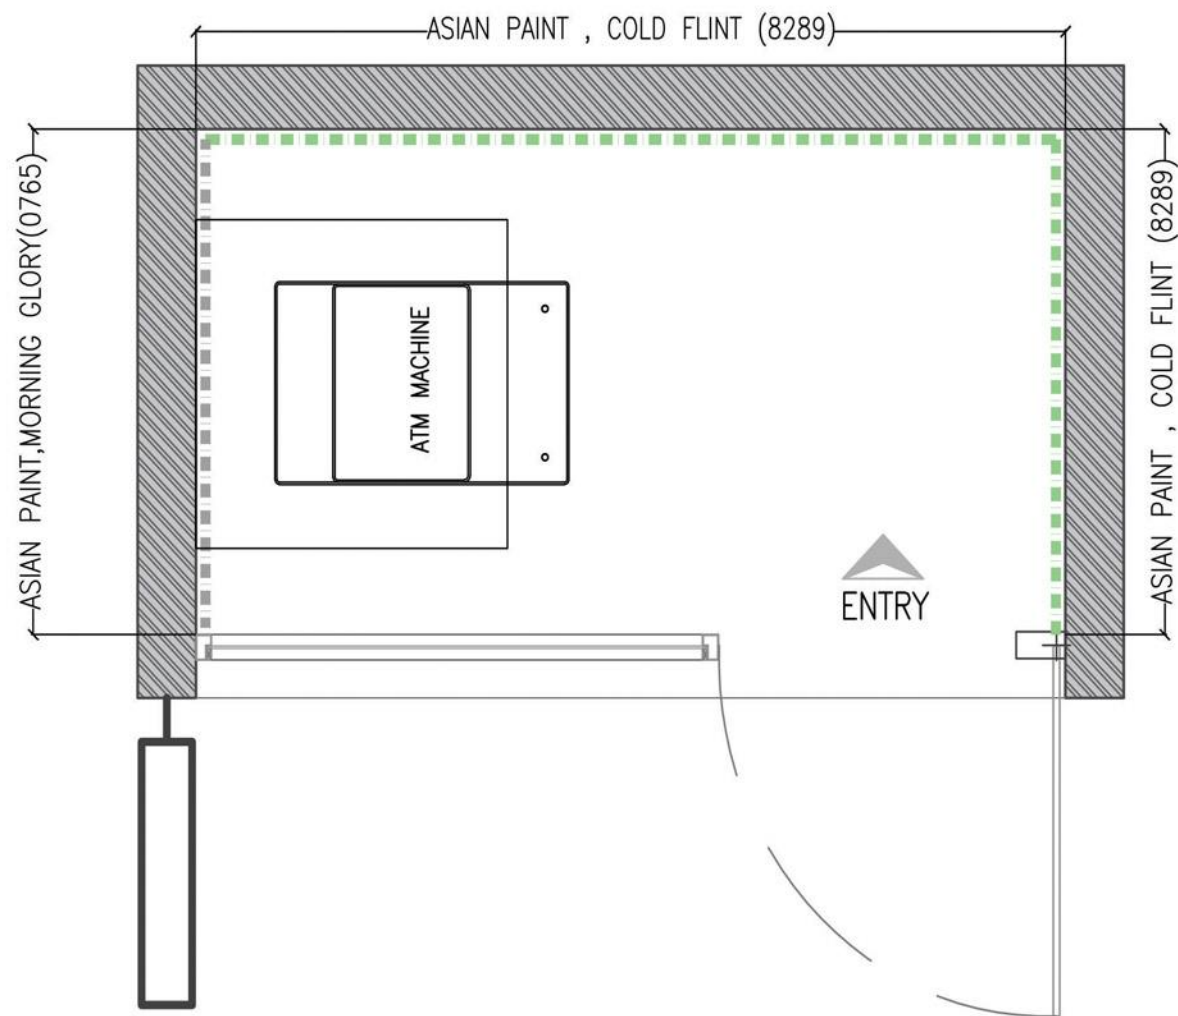Drawings | Rectangular horizontal format - Wall finishes layout




LEGEND OF FINISHES			
SR.NO	FINISHES CODE	DESCRIPTION	
PAINT			
1	PT-01 ■ ■ ■ ■ ■	ASIAN PAINT , MORNING GLORY (0765).	
2	PT-02 ■ ■ ■ ■ ■	ASIAN PAINT , COLD FLINT (8289).	

Drawings | Rectangular horizontal format - RCP & Elec. power layout and CCTV Camera installation

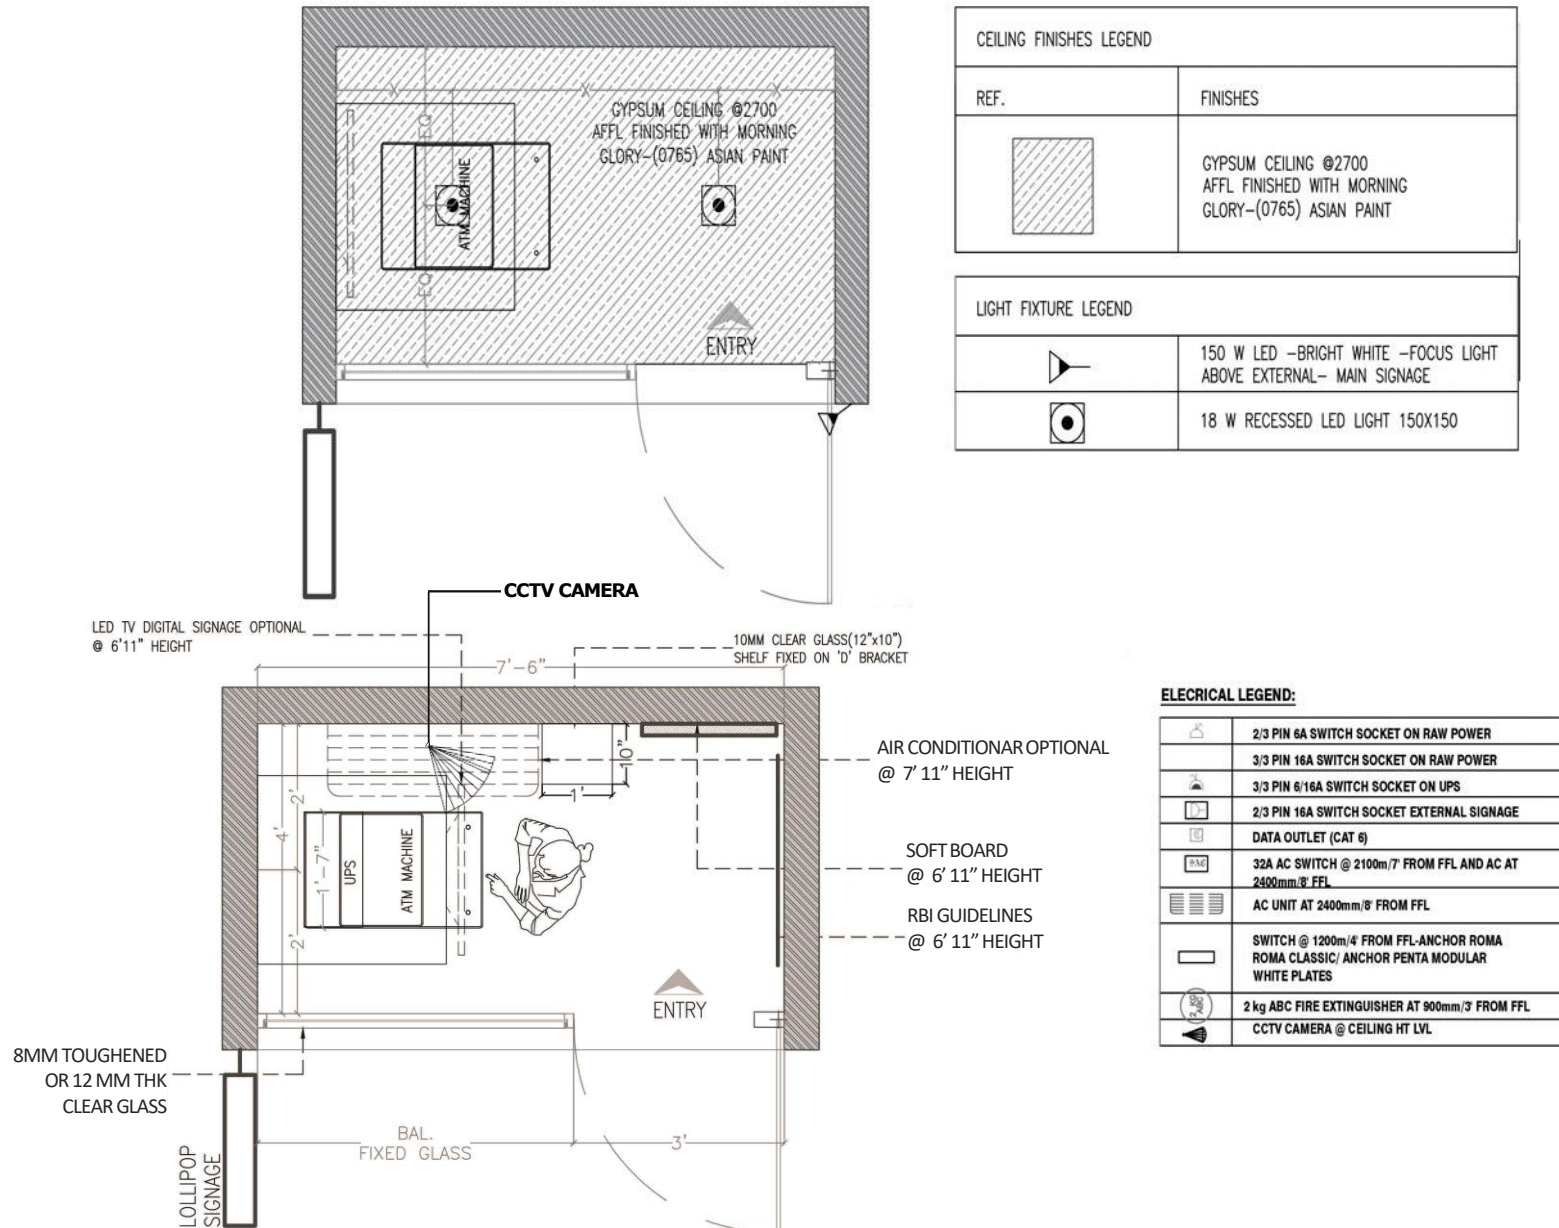


Drawings | Rectangular horizontal format - Signage layout

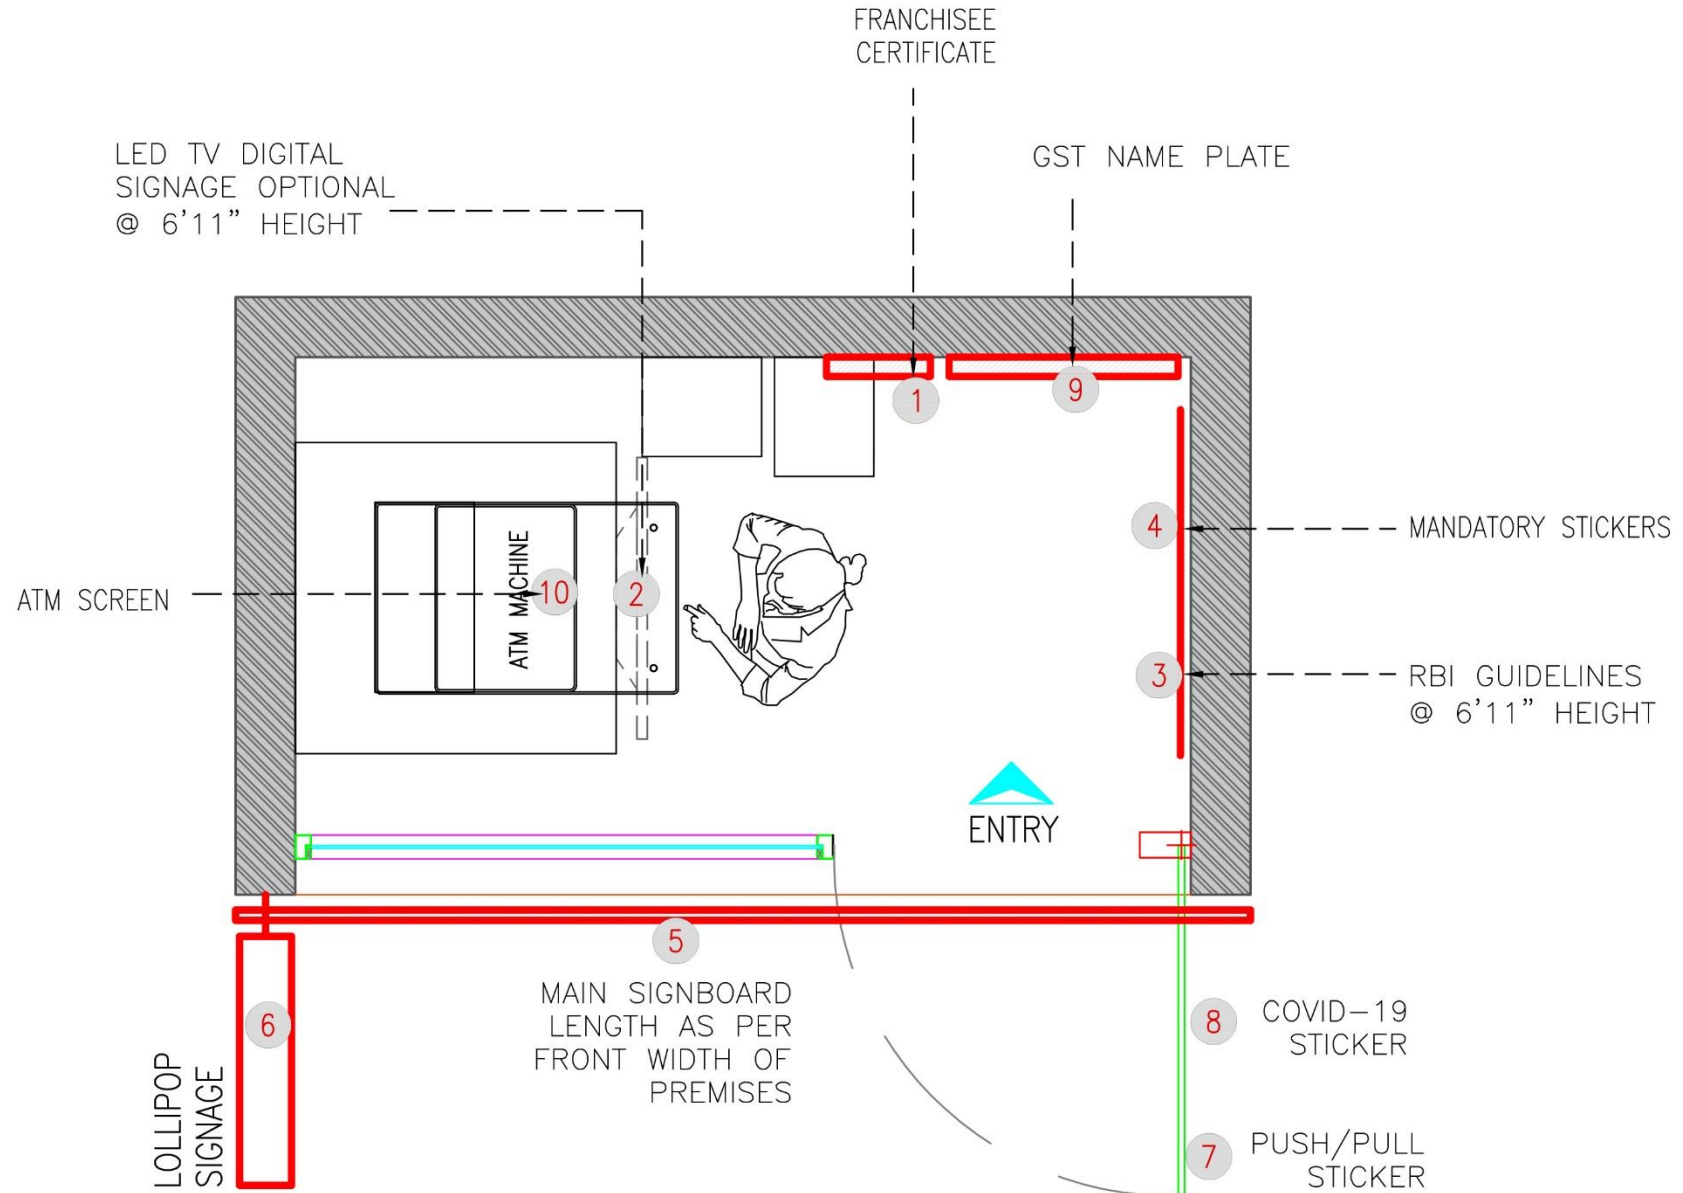


Note - Refer page number 48 for more details


Drawings | Rectangular horizontal format - Internal elevations

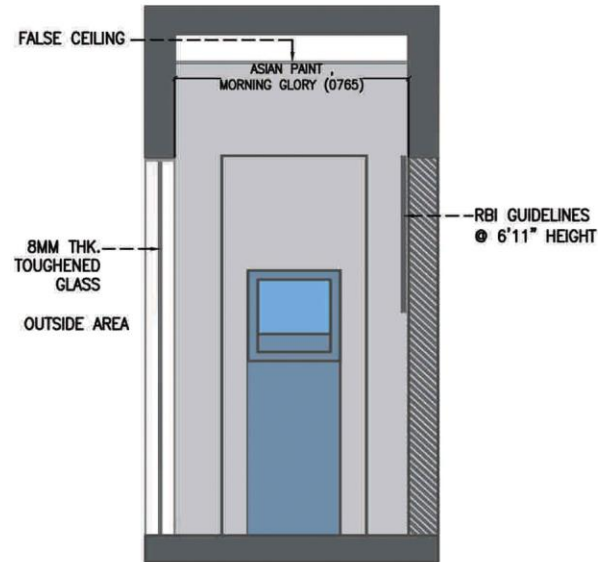


02 1:50 INTERNAL ELEVATION - 02
XIE-0101

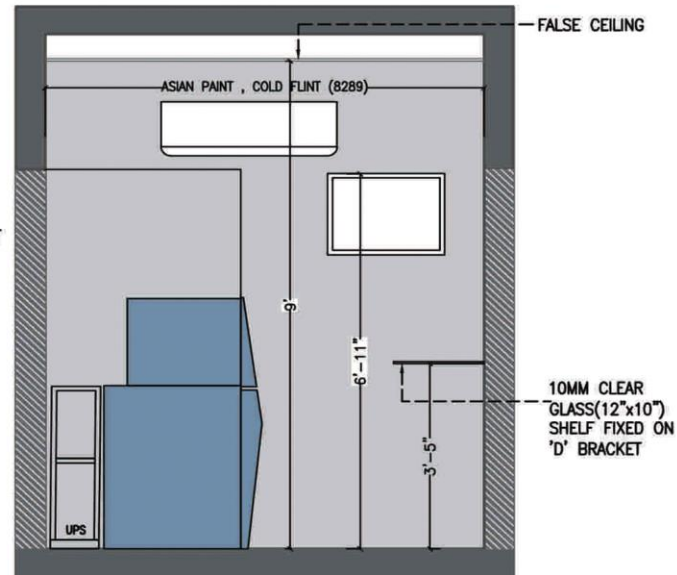


03 1:50 INTERNAL ELEVATION - 03
XIE-0101

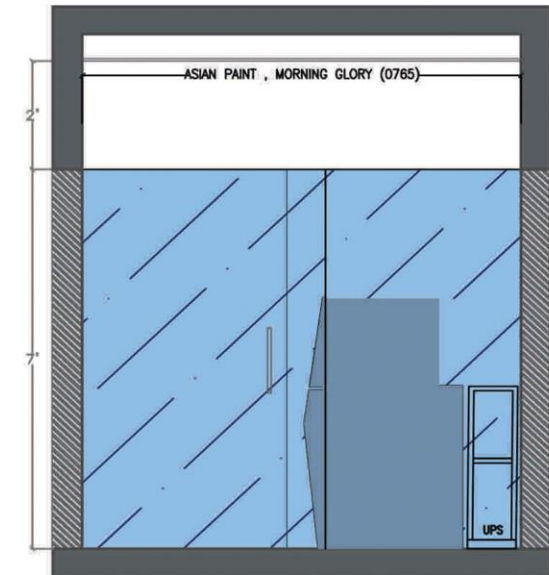

04 1:50 INTERNAL ELEVATION - 04
XIE-0101

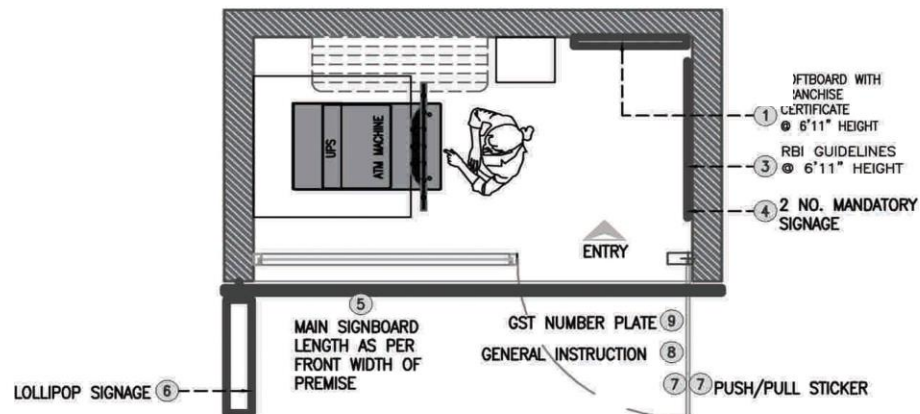

01 1:20 GENERAL ARRANGEMENT PLAN
XIE-0101

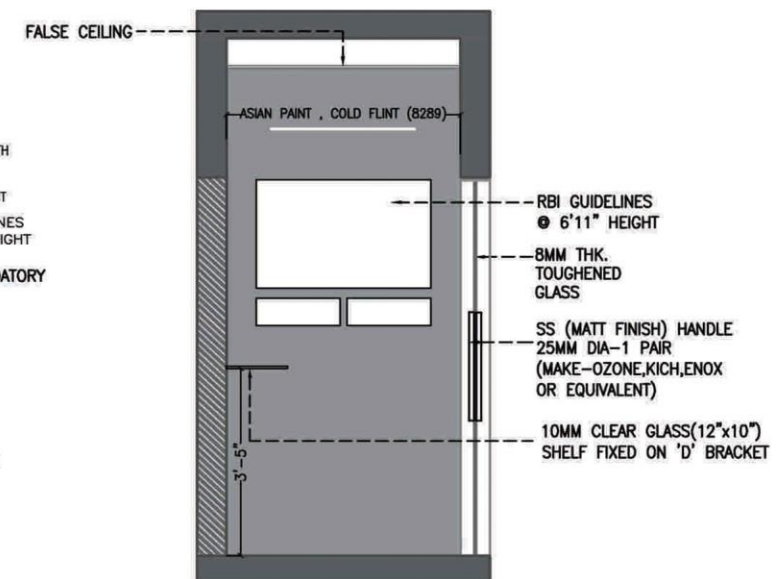

05 1:50 INTERNAL ELEVATION - 05
XIE-0101

Format Square

drawings

List of content

- General arrangement plan


- Top View
- Front Elveion

- Interior Lineout
- Flooring layout

- Wall finishes layout
- RCP & Elec. power layout

- Signage layout
- Internal elevations


Drawings | Square format - General arrangement plan

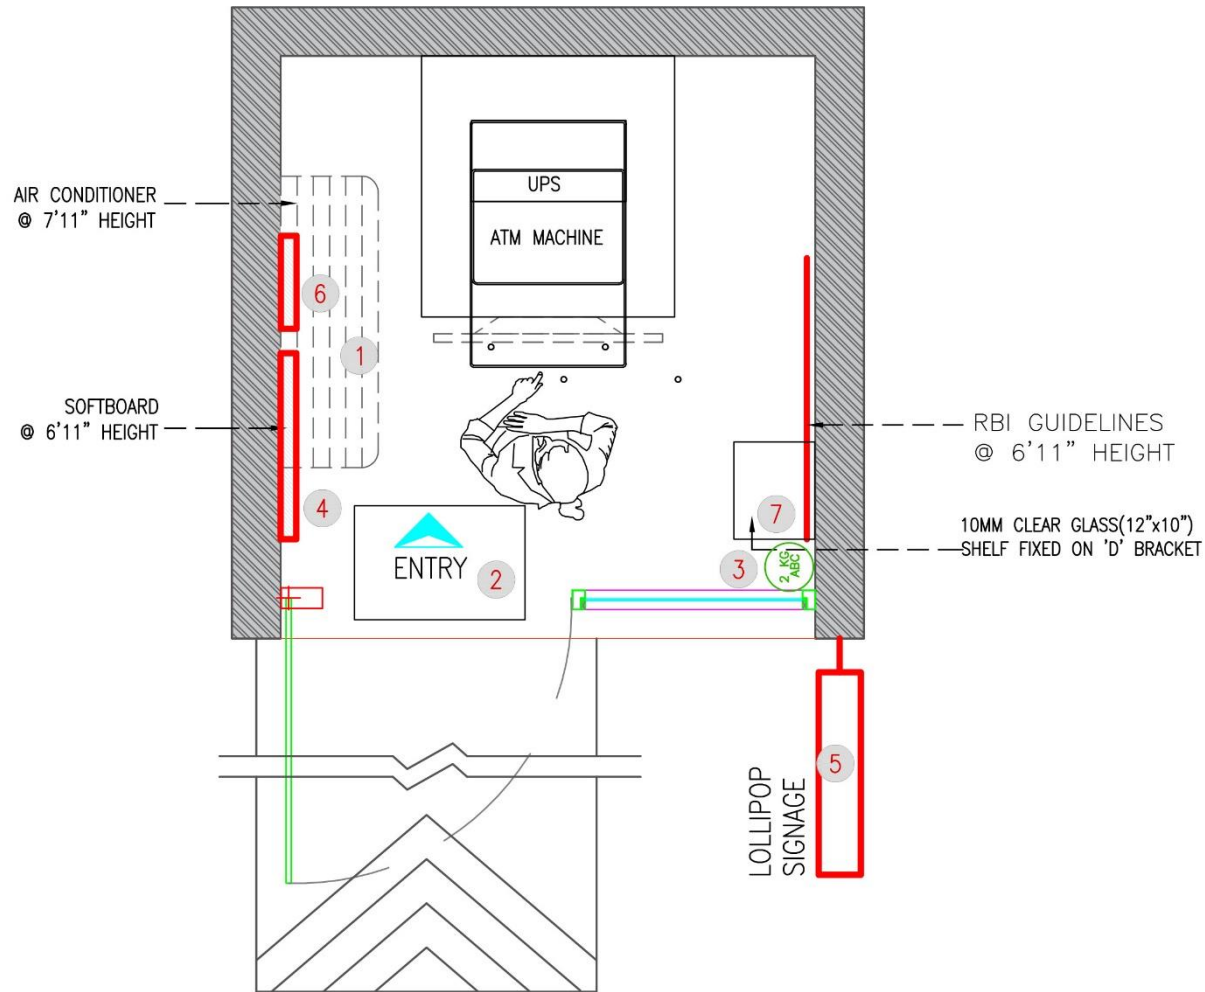


FURNITURE PLACEMENT (TO BE DONE BY FRANCHISEE)

Sr. No.	Items.	Qty.
1	Air Conditioner / Fan	Optional
2	Doormat	1
3	Fire Extinguisher	1
4	Soft Board A2 Size	1
5	ATM Lollipop Signage	1
6	Franchisee Certificate	1
7	Sanitizing station	As Per Requirement


Top View

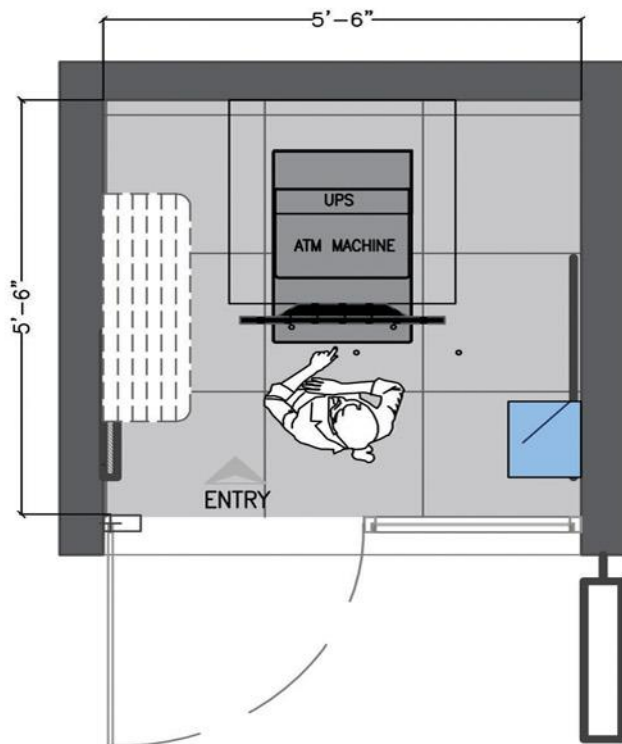


VAKRANGEE SIGNBOARD
LED TV OPTIONAL
ATM DRY PARTITION
ATM MACHINE

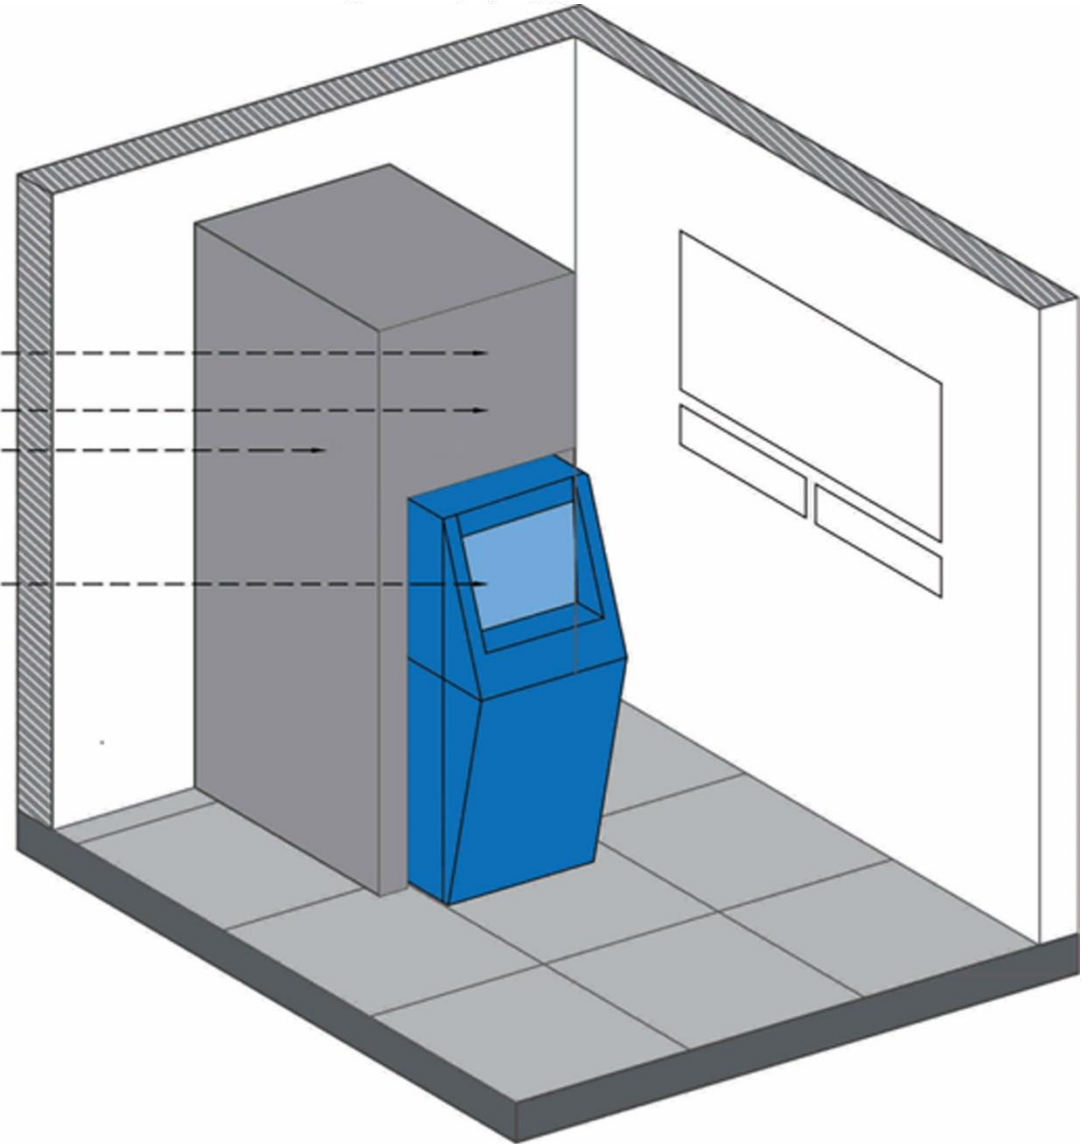

ISOMETRIC VIEW

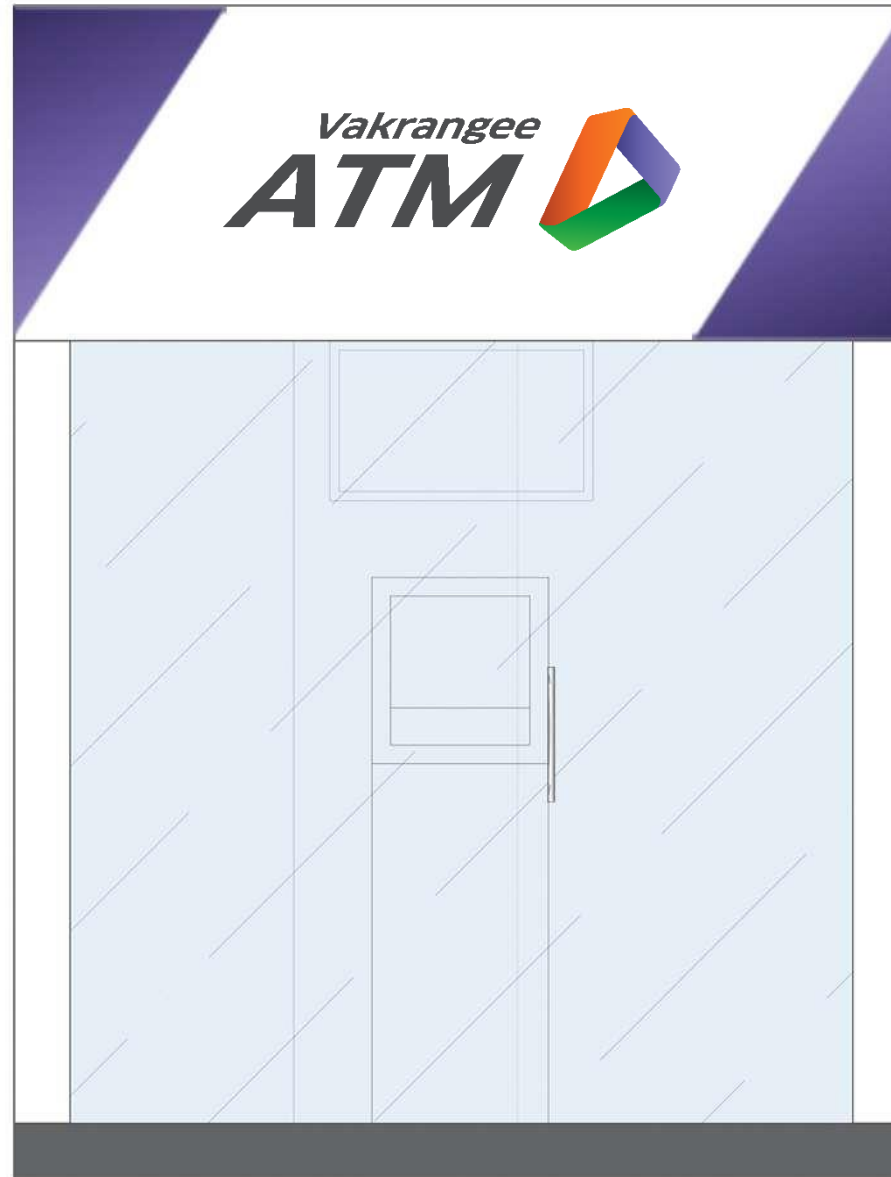

Drawings | Square format - Interior Lineout

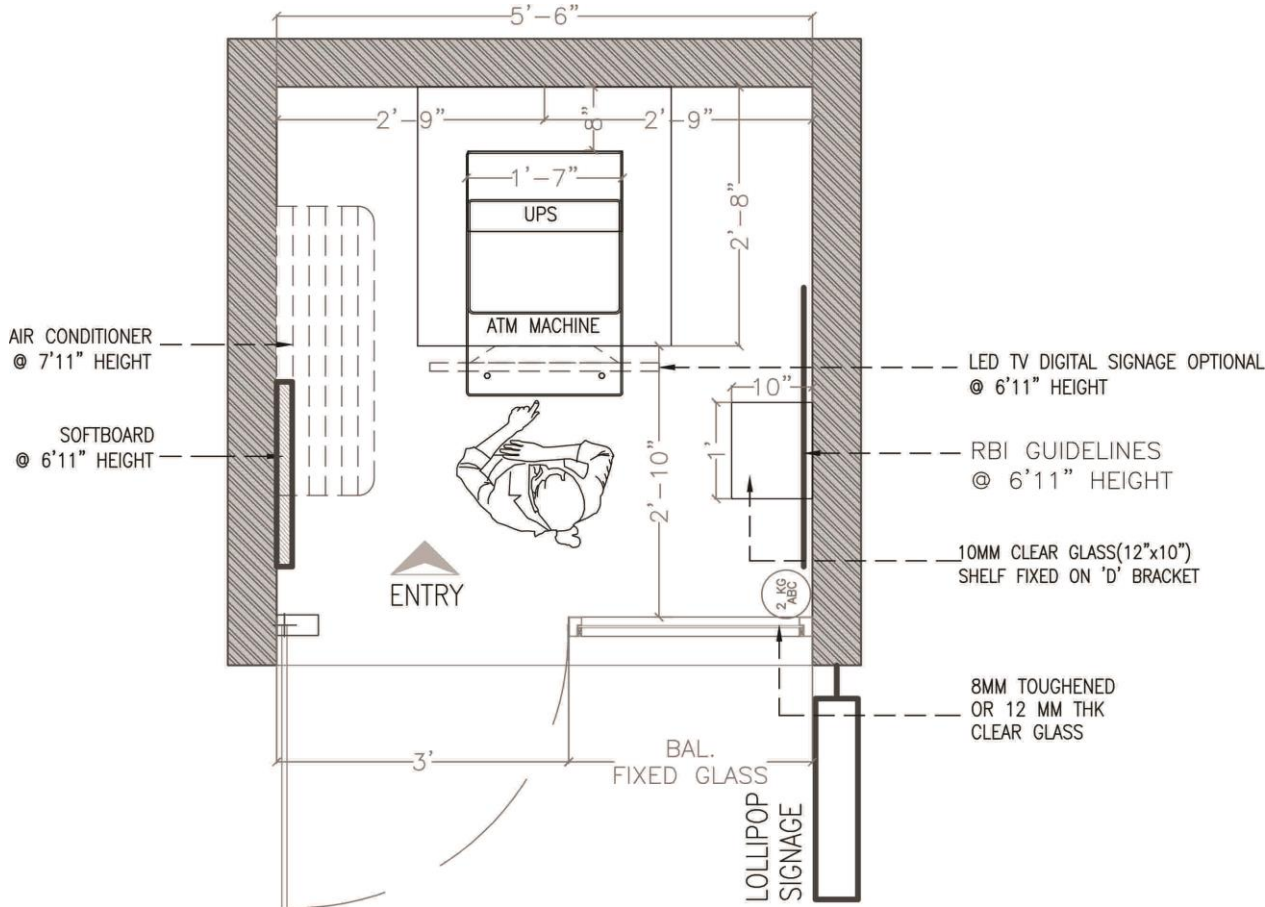

FIXED GLAZING SPECIFICATIONS


STRUCTURAL OPENING (UNFINISH TO UNFINISH)	SILL FROM FFL (IN MM)	LINTEL FROM FFL (IN MM)	WIDTH (IN MM)	HEIGHT (IN MM)	NOS.
WFGL 01	00	2150	AS PER SITE	AS PER SITE	1
WFGL 02	00	2150			1

DOOR SPECIFICATIONS

STRUCTURAL OPENING (UNFINISH TO UNFINISH)	WIDTH (IN MM)	HEIGHT (IN MM)
SERVICE AREA		
D1.01 .01	900	2150


- DOOR HT. IS GIVEN CONSIDERING 50MM SCREED AND FLOOR TILE.
- ALL DOOR FINISHED HEIGHT TO BE 2100MM



Drawings | Square format - Flooring layout

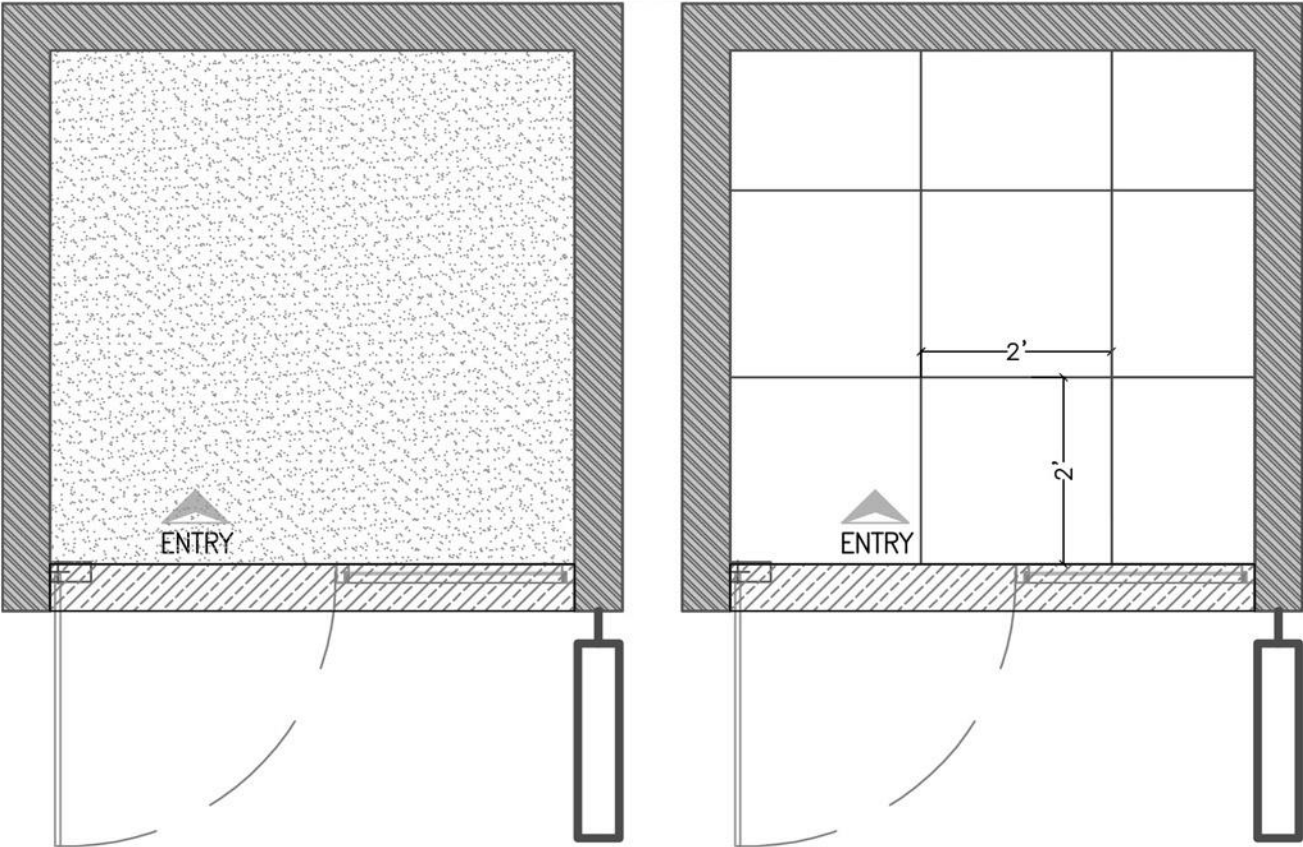


LEGEND		
SYMBOL	SPECIFICATION	MAKE
	F01 ESCARA LIGHT GREY (600X600)	SOMANY CERAMICS
	F02 VINYL FLOORING- ROLL FORM GENTLY GREY (K822-001)	ARMSTORNG
	GN1 GRANITE	
	SK-01 75MM HIGH SKIRTING SAME AS FLOOR TILES (FOR VINYL FLOORING AND TILES FLOORING)	

Drawings | Square format - Wall finishes layout

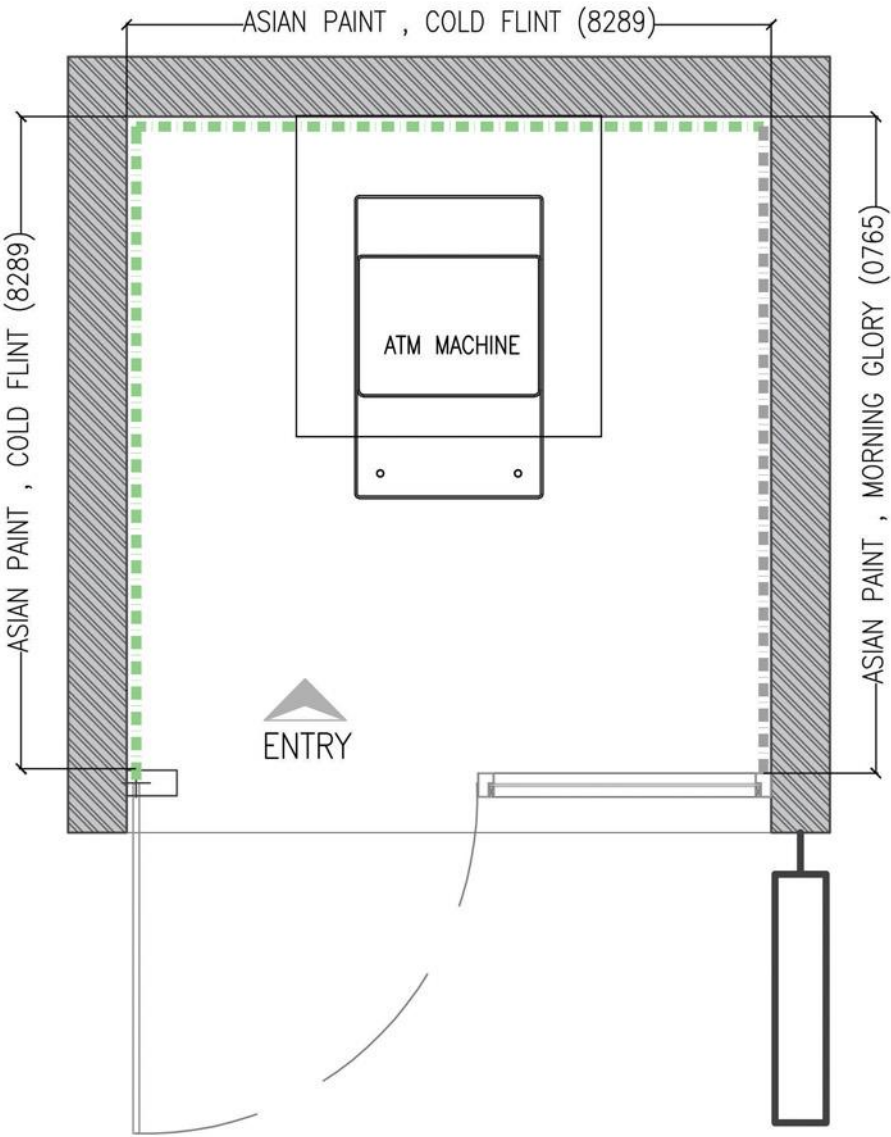

LEGEND OF FINISHES			
SR.NO	FINISHES CODE	DESCRIPTION	
PAINT			
1	PT-01 ■ ■ ■ ■ ■ ■ ■ ■	ASIAN PAINT , MORNING GLORY (0765).	
2	PT-02 ■ ■ ■ ■ ■ ■ ■ ■	ASIAN PAINT , COLD FLINT (8289).	


Drawings | Square format - RCP & Elec. power layout **CCTV Camera installation**

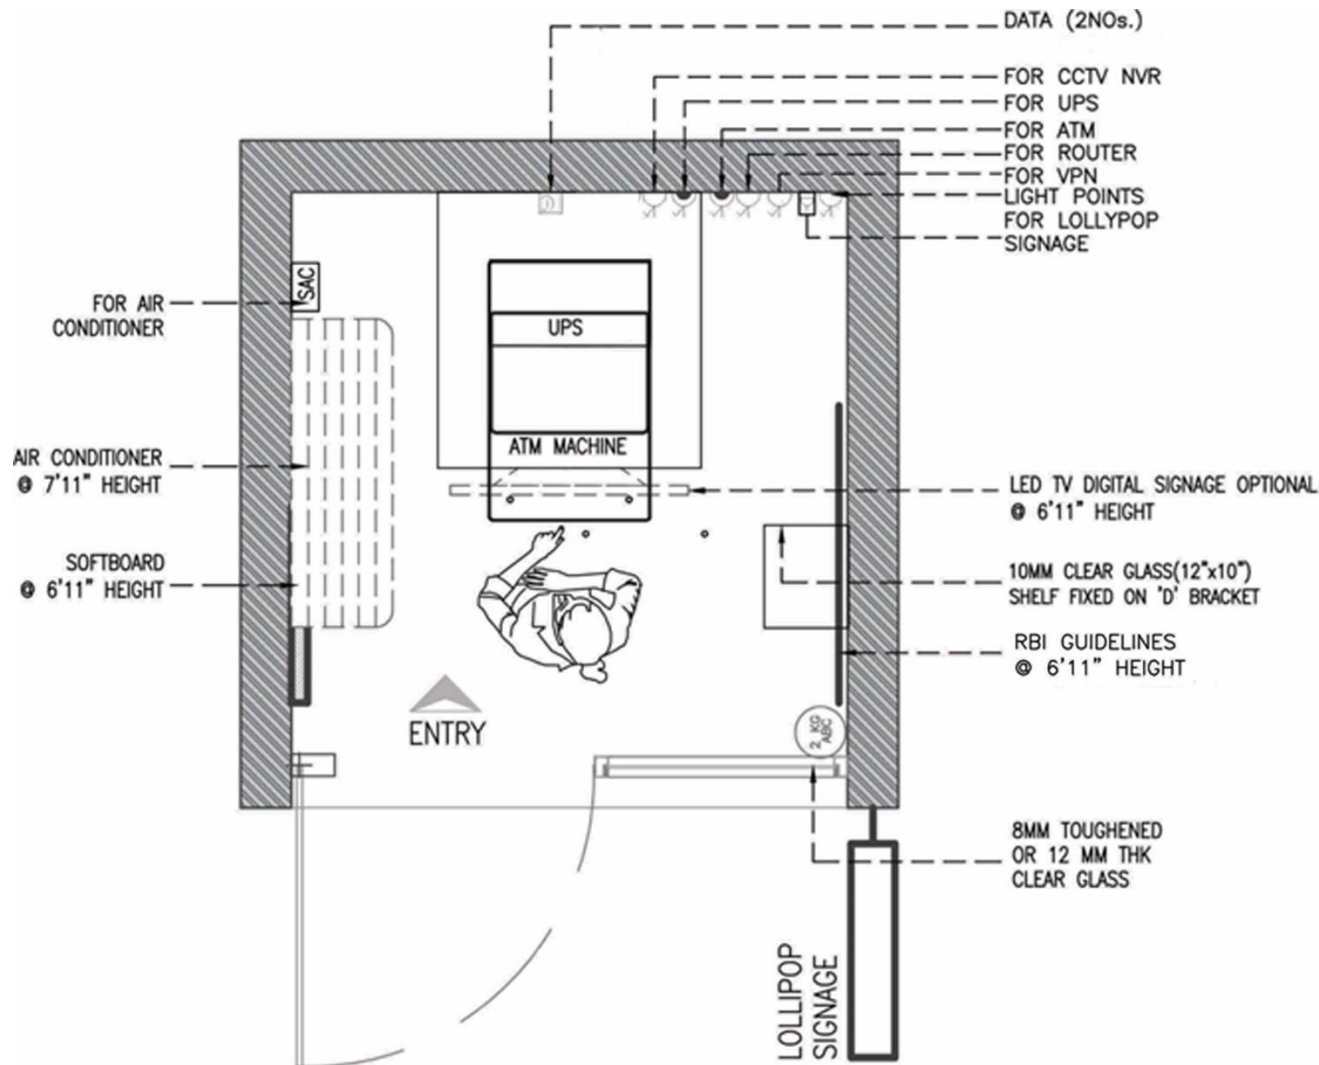

ELECTRICAL LEGEND:


	2/3 PIN 6A SWITCH SOCKET ON RAW POWER
	3/3 PIN 16A SWITCH SOCKET ON RAW POWER
	3/3 PIN 6/16A SWITCH SOCKET ON UPS
	2/3 PIN 16A SWITCH SOCKET EXTERNAL SIGNAGE
	DATA OUTLET (CAT 6)
	32A AC SWITCH @ 2100mm/7' FROM FFL AND AC AT 2400mm/8' FFL
	AC UNIT AT 2400mm/8' FROM FFL
	SWITCH @ 1200mm/4' FROM FFL-ANCHOR ROMA ROMA CLASSIC/ ANCHOR PENTA MODULAR WHITE PLATES
	2 kg ABC FIRE EXTINGUISHER AT 900mm/3' FROM FFL
	CCTV CAMERA @ CEILING HT LVL

Drawings | Square format - Signage layout

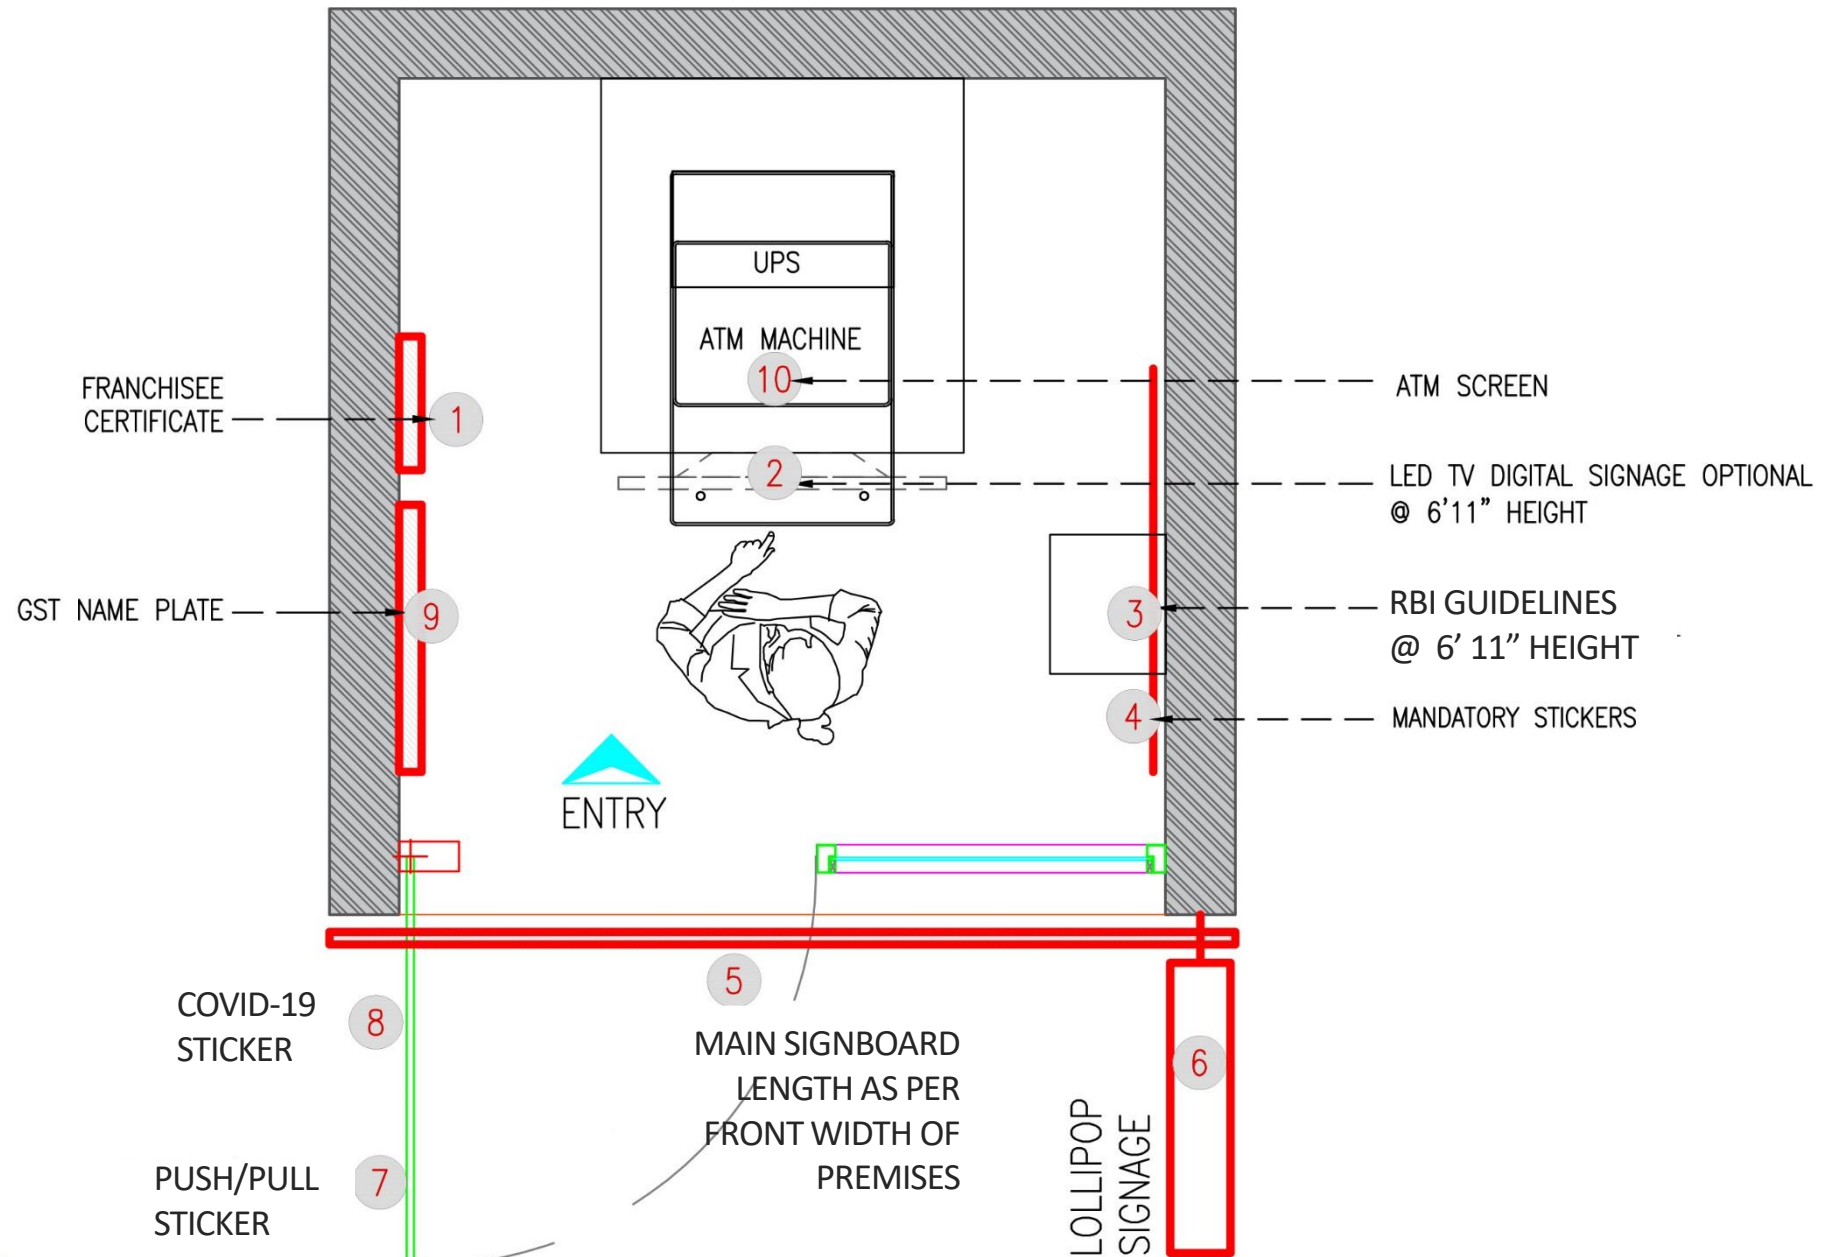


Note - Refer page number 48 for more details


Drawings | Square format - Internal elevations

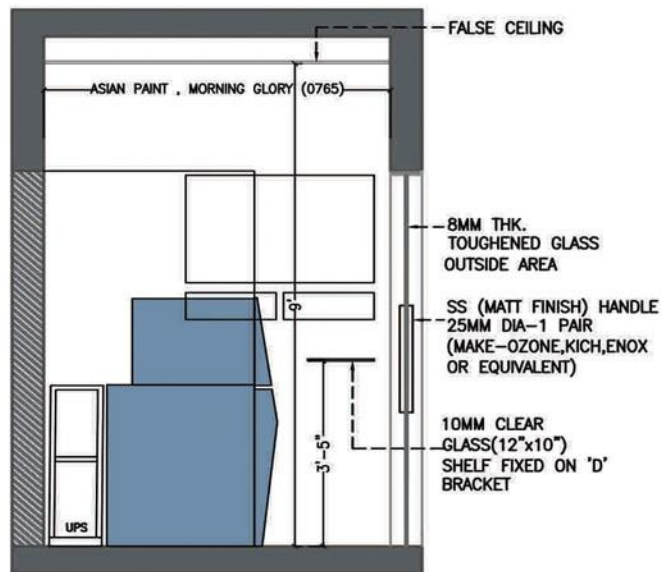


04 1:50 INTERNAL ELEVATION-04
XIE-0101

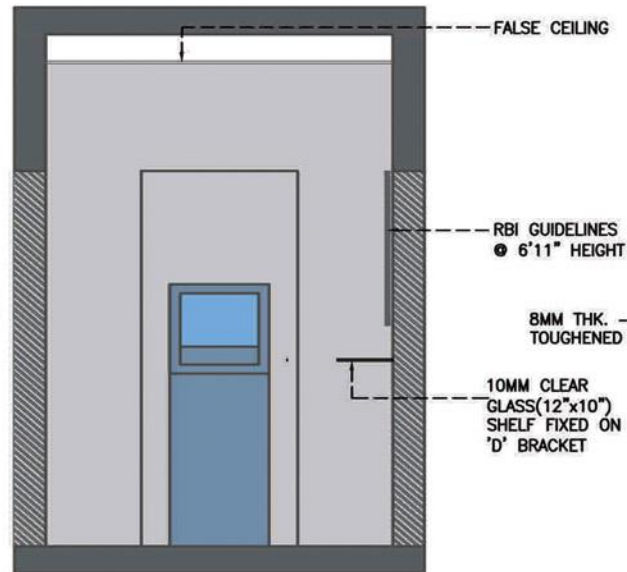


02 1:50 INTERNAL ELEVATION-02
XIE-0101

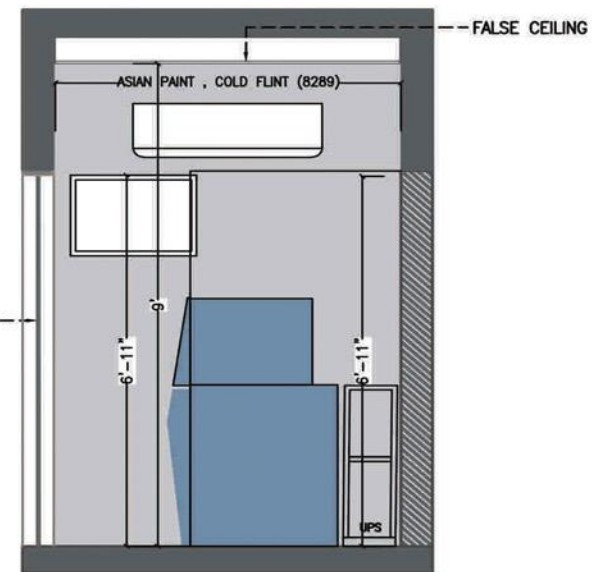

03 1:50 INTERNAL ELEVATION-03
XIE-0101

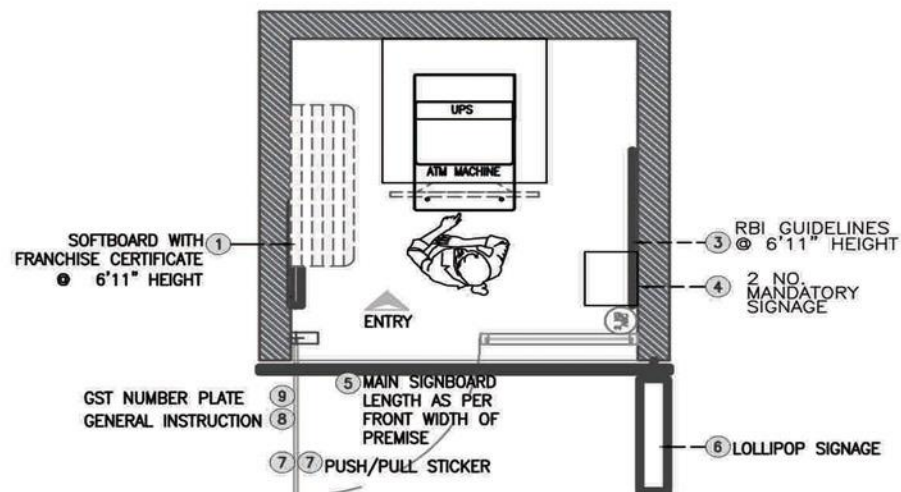

01 1:20 GENERAL ARRANGEMENT PLAN
XIE-0101

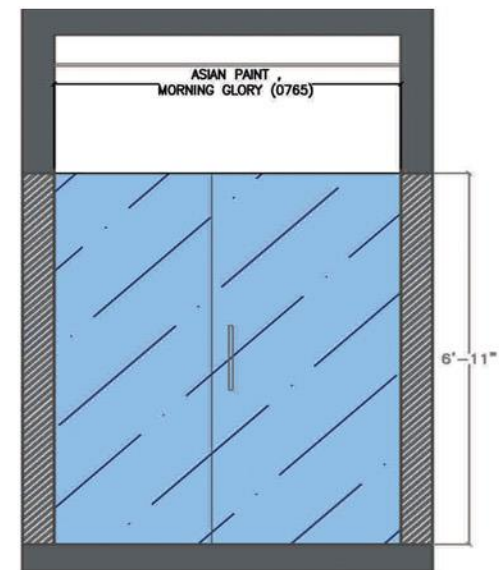

05 1:50 INTERNAL ELEVATION-05
XIE-0101

Typical DETAILS

drawings

03.4


- External elevations
- Door detail
- RAMP
- Placement of Equipments
- ATM Cabin Details
- ATM Earthing Diagram
- CCTV Camera Layout

Drawings | Typical details - External elevations

Vakrangee will provide the Artwork



1:20 FRONT FACADE
EXTERNAL ELEVATION

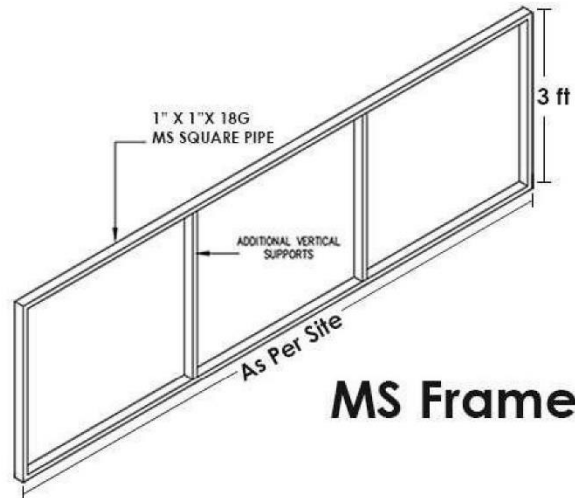


MS Frame

Main Signboard Frame - To be made by Franchisee
MS Square pipe (1"x1"x18 gauge)
Height - 3 ft (Standard)
Length - To be made as per the Flex Artwork supplied by Vakrangee

Main Signage Specifications

- **Flex to be printed and installed by Franchisee**
- Flex Media - StarFlex - Avery dennison - LG Flex quality - Front lit flex with Grey or Black back - minimum 14 oz.
- Printing technology - HP latex - Third Generation Lamination - Gloss

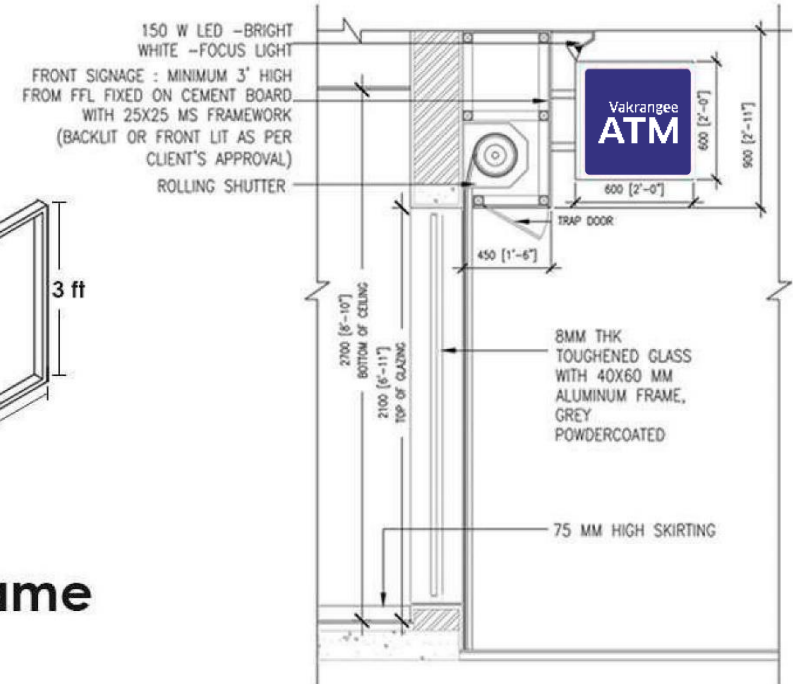




LOLLIPOP SIGNAGE -

OPTION 1
DOUBLE SIDED WALL MOUNTED FLANGE
SIZE - 2ft x 2ft x 5 inch(depth)


MATERIAL SPECS:
WHITE COLOUR ACRYLIC MOLDED FLANGE WITH ALUMINUM FRAME, TO BE FIXED WITH M. S BRACKETS ON WALL WITH FASTENERS.
VINYL - STAR/3M/LG VINYL
PRINTING - 3RD GENERATION HP LATEX PRINTING OR PLOTTER CUT VINYL
LIGHT - LED STRIP LIGHTING SYSTEM

OPTION 2
GLOW SIGNBOARD WITH 1"x1" MS SQUARE PIPE BOX FRAME WITH ALUMINUM L ANGLE ON BORDER FOR EDGE TO EDGE LIGHTING WITH LED STRIP / TUBELIGHT.
PRINTING - BACKLIT STARFLEX ON HP LATEX PRINTER WITH BACK TO BACK FLEX PRINTING WITH 3 YEAR WARRANTY

Drawings | Typical details - Door 1/2

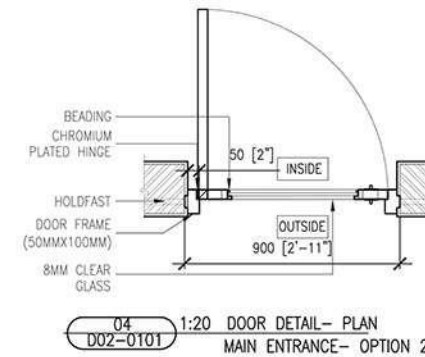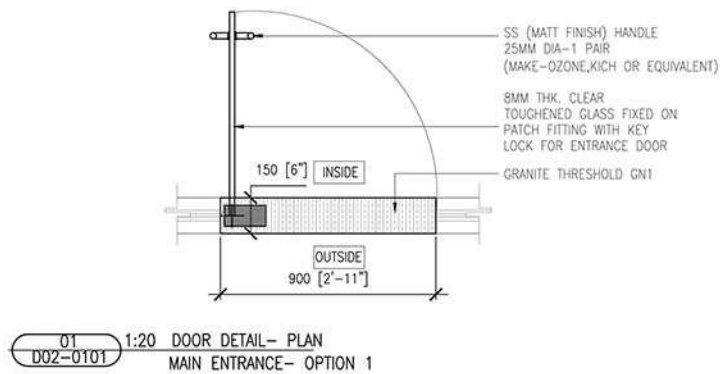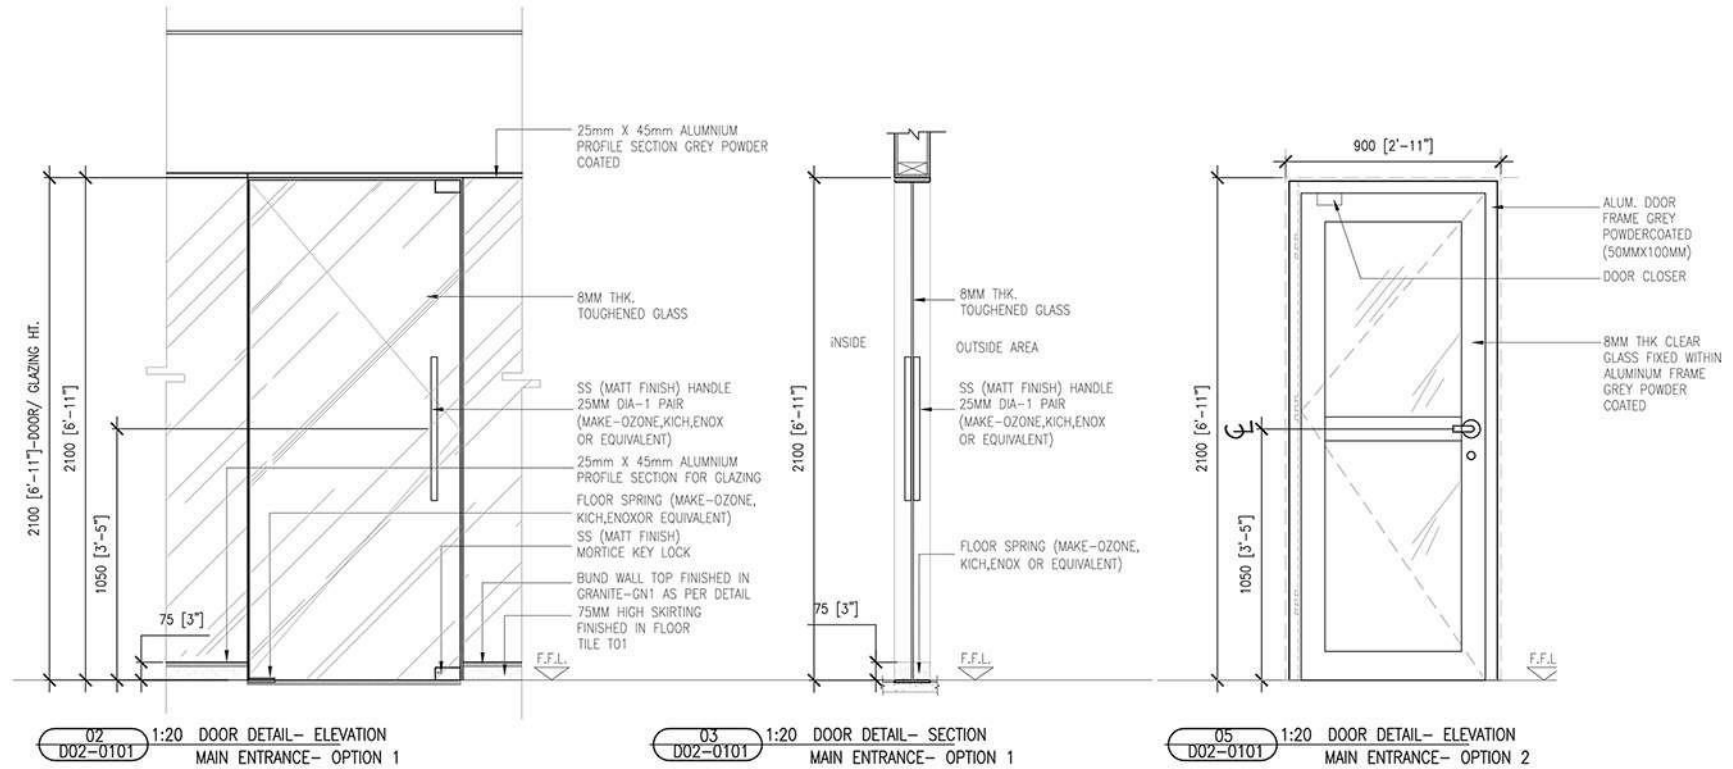

Drawings | Typical details - Door 2/2


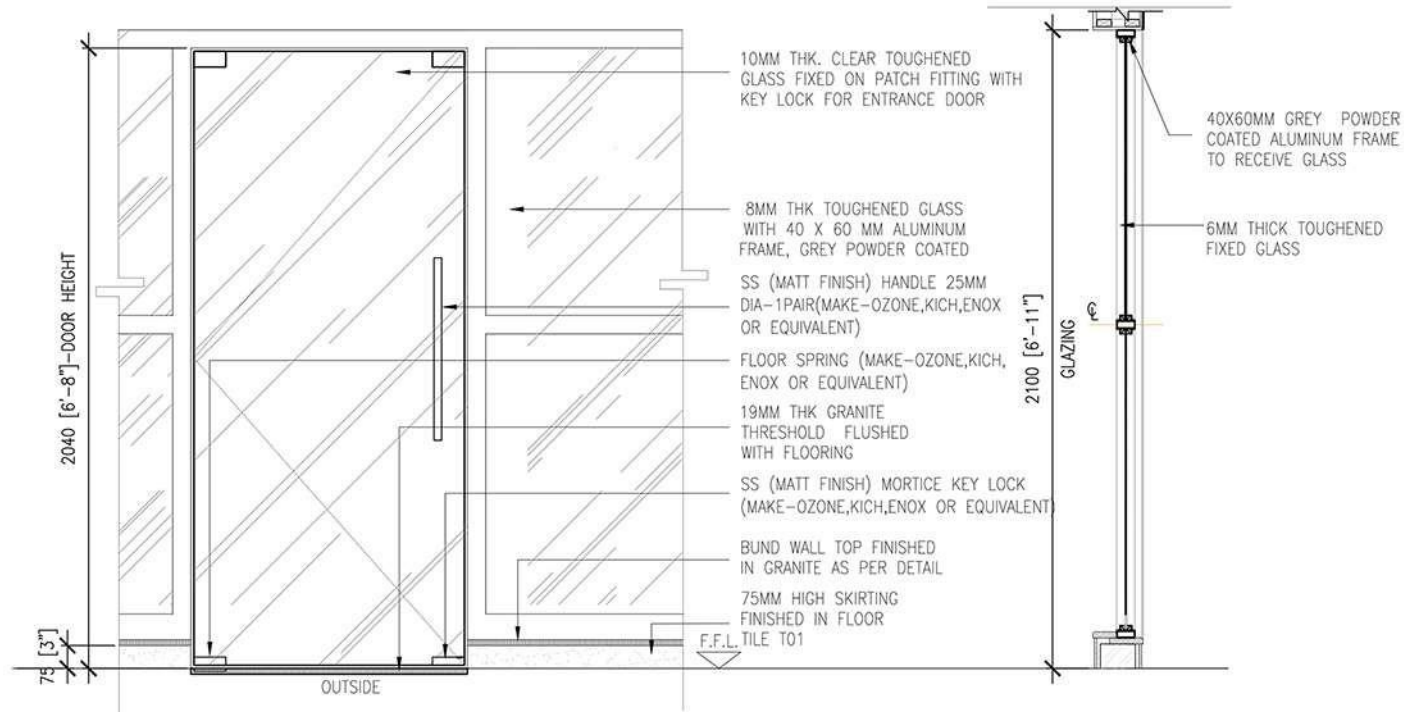


05 1:20 ELEVATION AND SECTION
D02-0102 MAIN ENTRANCE- OPTION 3

NOTE:


- TOUGHENED GLASS IS RECOMMENDED FOR SAFETY. IF 8 MM TOUGHENED GLASS IS NOT AVAILABLE, FRANCHISEE TO USE 12 MM CLEAR GLASS.
- IF GREY POWDER COATING IS NOT AVAILABLE, FRANCHISEE TO USE NATURAL ALUMINUM FINISH.

Drawings | Typical details - Ramp

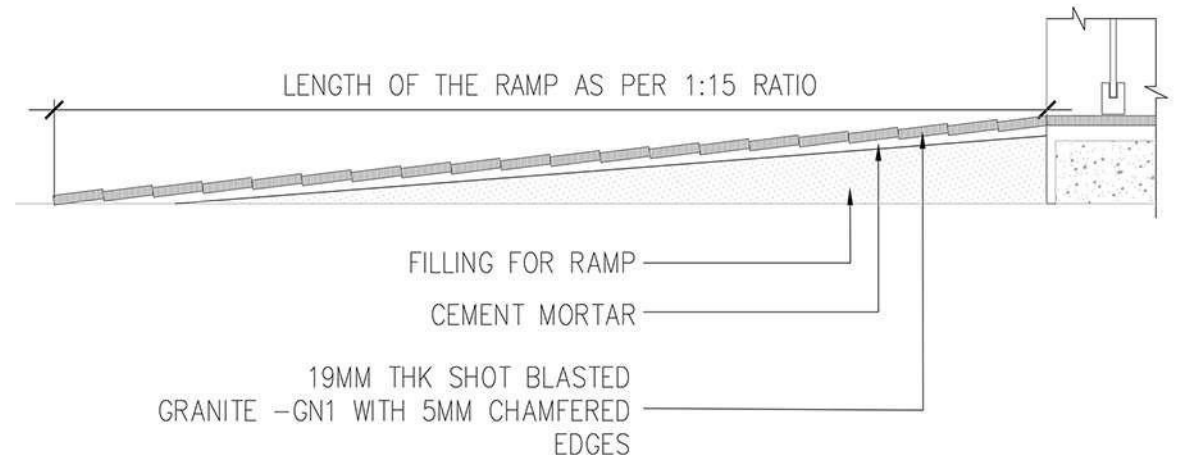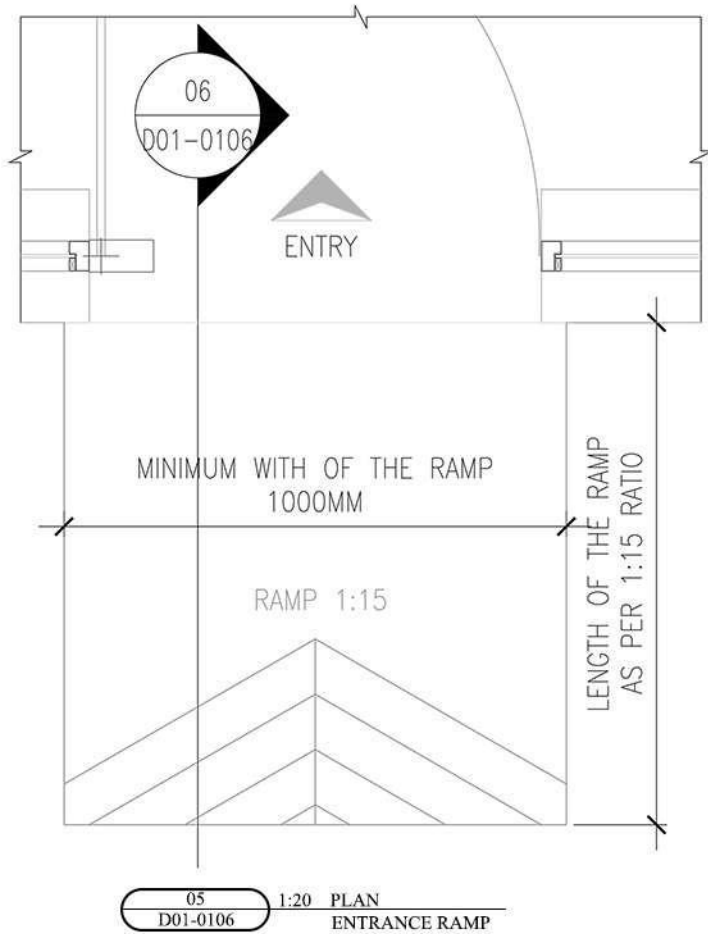

06
D01-0106

1:20 SECTION - OPTION 1
ENTRANCE RAMP

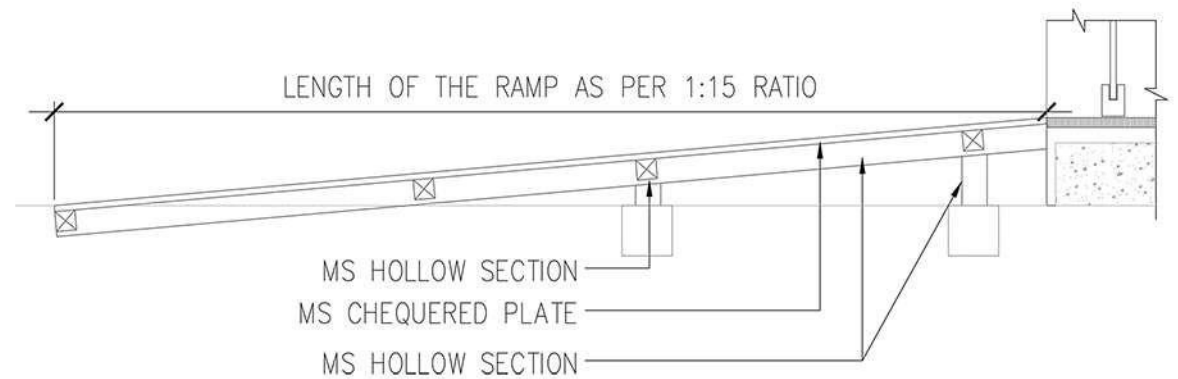


06
D01-0104


1:20 SECTION - OPTION 2
ENTRANCE RAMP

**NOTE : Provision of RAMP is preferred to facilitatte easy access to ATM
by person with disability / Senior Citizen.**


Drawings | Typical details - ATM Cabin Details

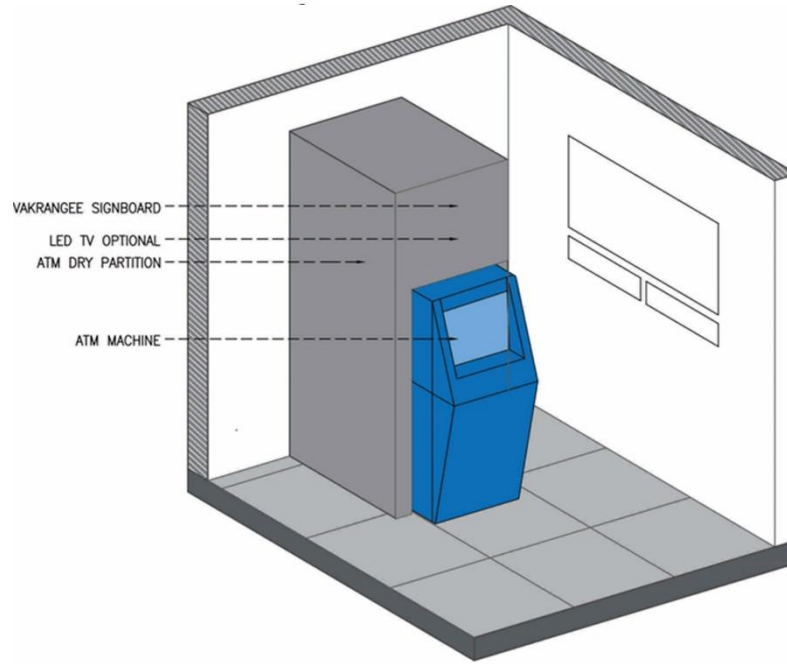


ISOMETRIC VIEW 5

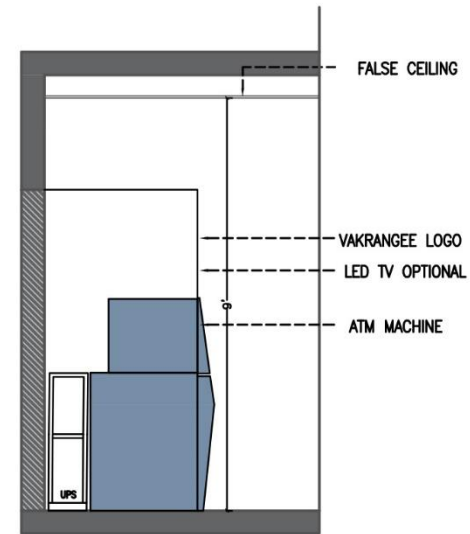


SECTIONAL ELEVATION 4

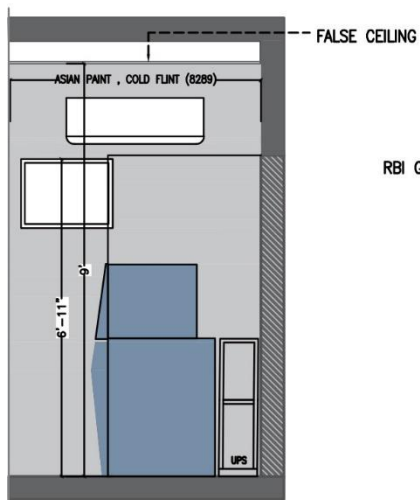

SECTIONAL ELEVATION 3

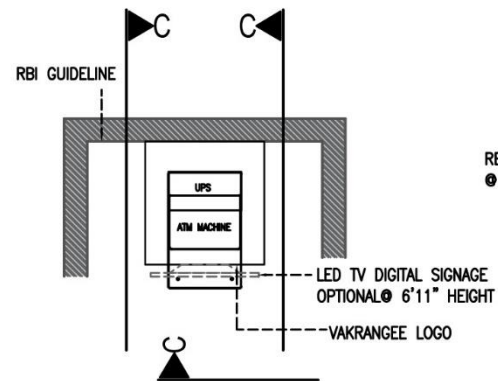


PLAN 1

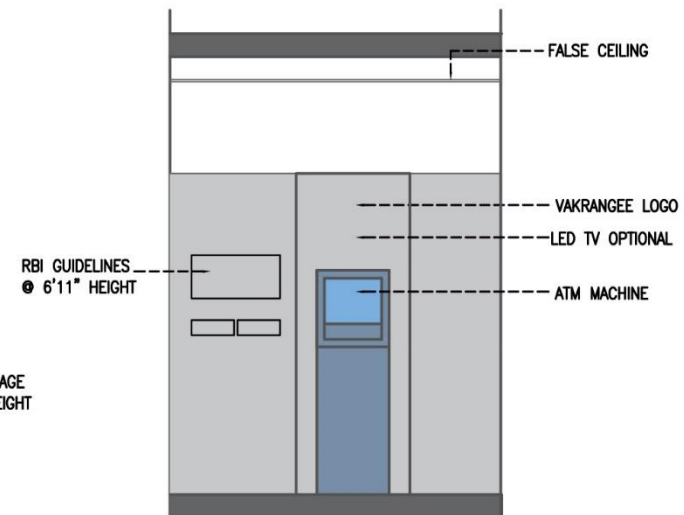


FRONT ELEVATION 2

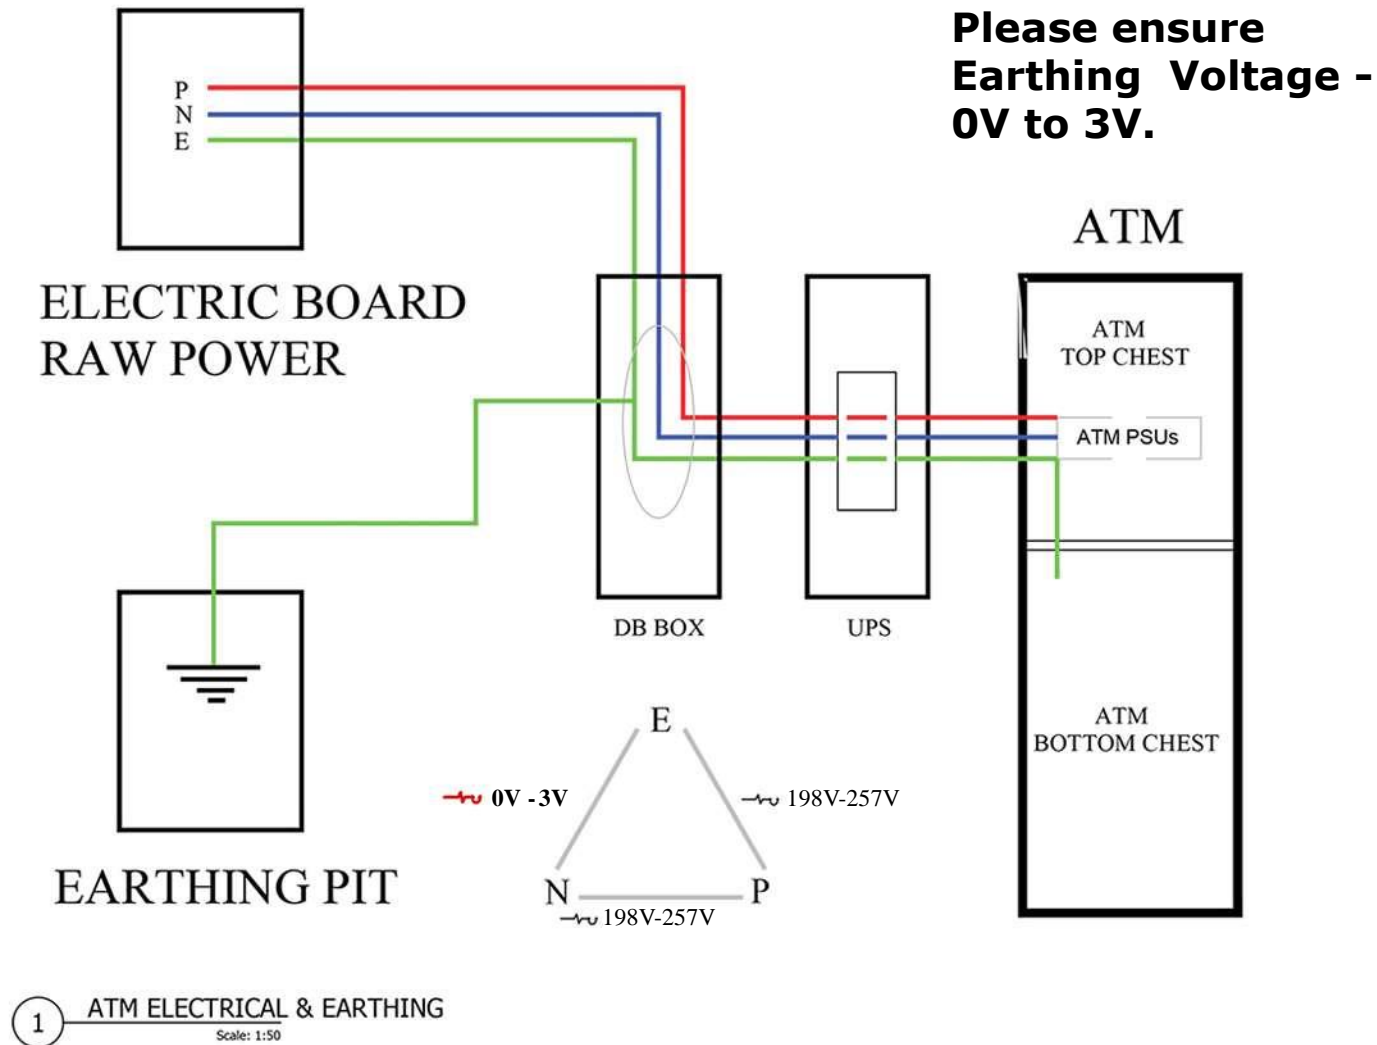


Drawings | Typical details - ATM Earthing Diagram

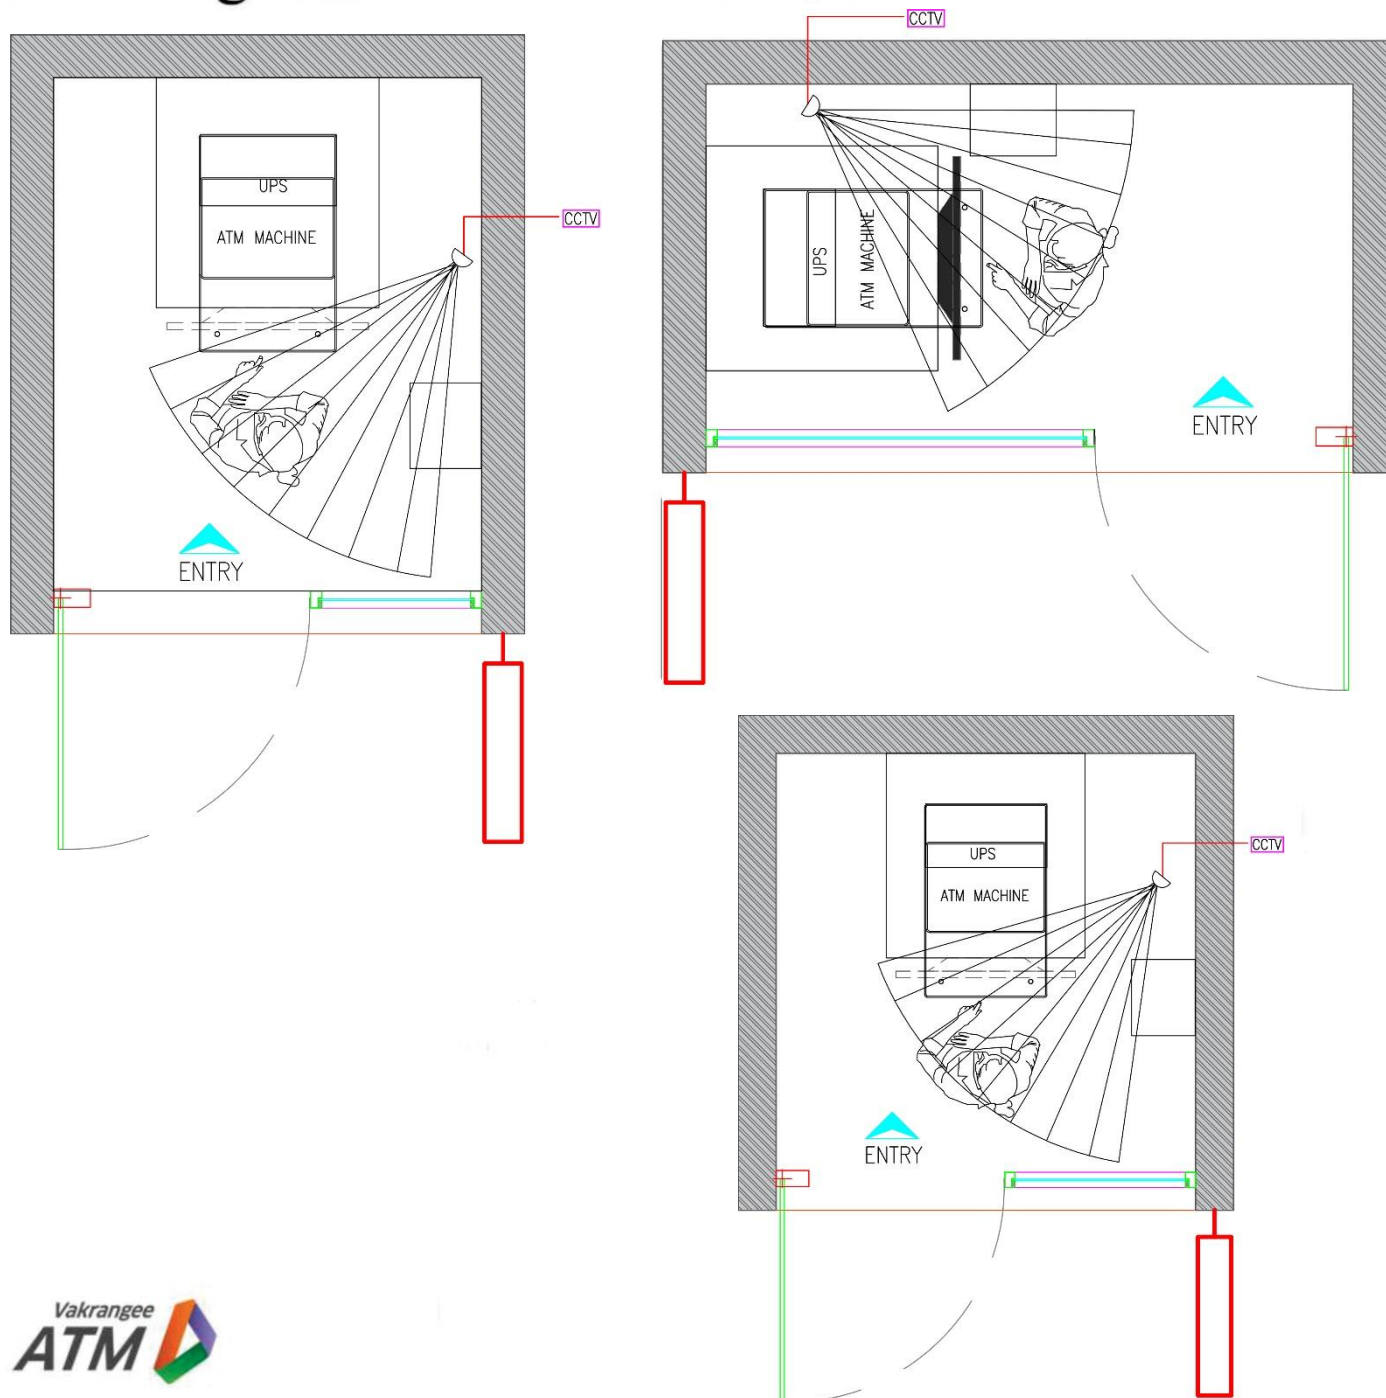

Drawings | Typical details - CCTV Camera Layout




LEGEND:

	NVR
	CAT- 6 WIRING FOR CCTV
	CCTV CAMERA @ CEILING HT LVL

Note :

- Please keep extra cable length of 2mtr at the CCTV camera location for smooth installation.
- The position of the CCTV camera must ensure coverage of the ATM loading and cash dispense operations
- The CCTV system shall have a backup of 90 days.
- The camera should be placed in such a way that it does not capture the pin being entered by the customer

Drawings | Typical details - Placement of Equipments

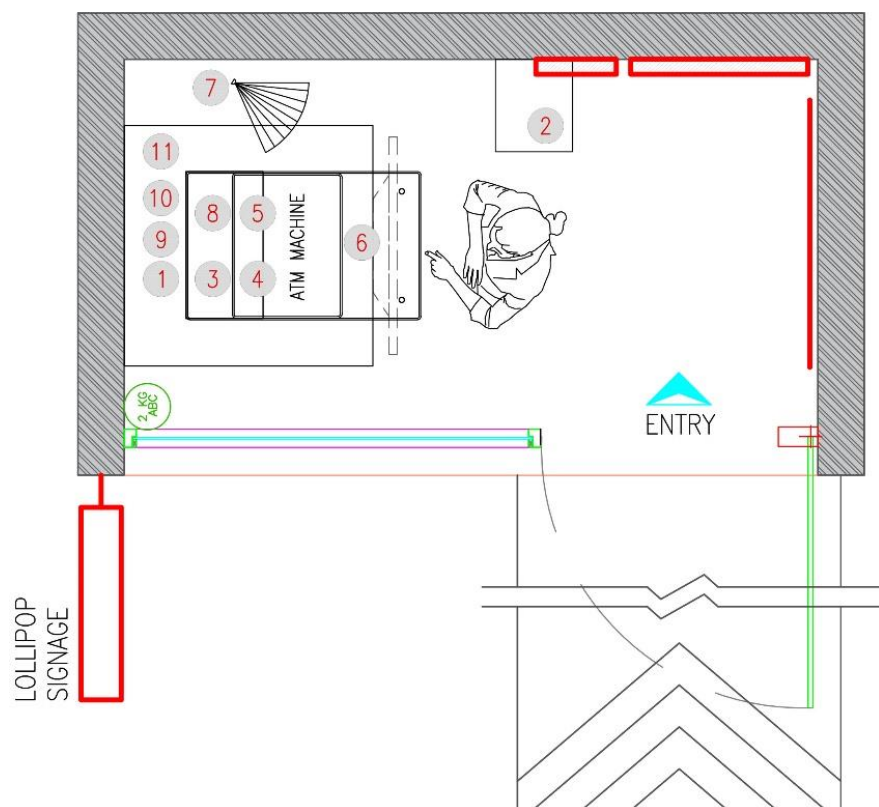

Sr. No.	Equipment	Specification
1	Cash Counting and Fake Currency Machine	Currency Counting & Fake note Detector: UV/MG/IR Detection, Feeder & Holder capacity-100 note or higher
2	UPS (Applicable for ATM Service)	1 KVA UPS with battery backup of minimum of 1 hour (Backup should be decided depending on the power situation in the Kendra location)

Equipments to be purchased and Installed by Franchisee



1. 1 KVA UPS With Batteries (QTY – 1 Nos.)



2. Cash Counting and Fake Currency Machine (QTY – 1 Nos.)



3. Router (QTY – 1 Nos.)



4. LAN Cable- 5 Mtr. (QTY – 2 Nos.)



5. Digital Multimeter (QTY – 1 Nos.)

Equipments to be Supplied by Vakrangee



6. ATM on Custodian Basis (QTY – 1 Nos.)



7. CCTV Camera (For ATM) (QTY – 1 Nos.)



8. VPN Device (QTY – 1 Nos.)



9. Surveillance HDD (QTY – 1 Nos.)



10. POE Switch (QTY – 1 Nos.)




11. NVR (QTY – 1 Nos.)

Marketing elements
and signage

04

Marketing element and signage

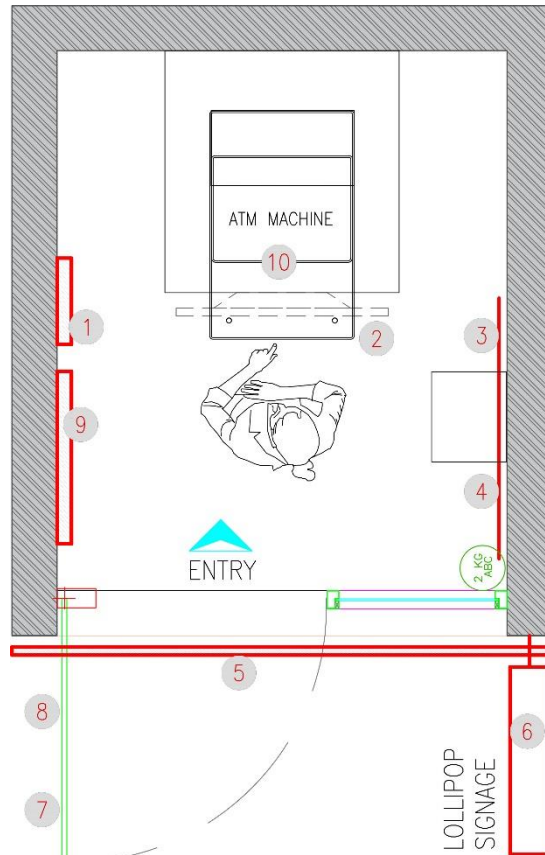

4 - 2 Nos. of Mandatory Signages - 16"x5"



06 - Lollipop Signage 600x600mm



10 - ATM Screen



02 - LED Digital Signage Optional



05 - Main Signage @ lintel level - length as per site.



07 - Push and pull sign - 5"x 5"




09 - GST Name plate - 11.693"x8.268 Vinyl sun board



08 - Covid-19 Do's and Don'ts - 16.535"x11.693 Vinyl sun board



01 - Franchisee Certificate 210x297mm. Certificate Artwork will be provided by Vakrangee. Black Photo frame to be procured by Franchisee.

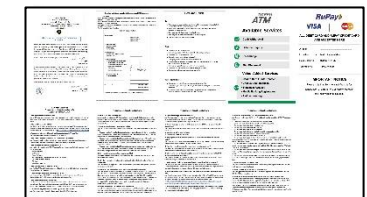

3-A



3-B

03 - RBI Guidelines 943x535mm printed on vinyl and pasted on 3 mm thick sunboard




https://vkms.vakrangee.in/Downloads/D_?_=OnlyATM.zip




Design Guidelines for Shop - in - Shop ATM Installation

05





Drawings | ATM Cabin - General arrangement plan

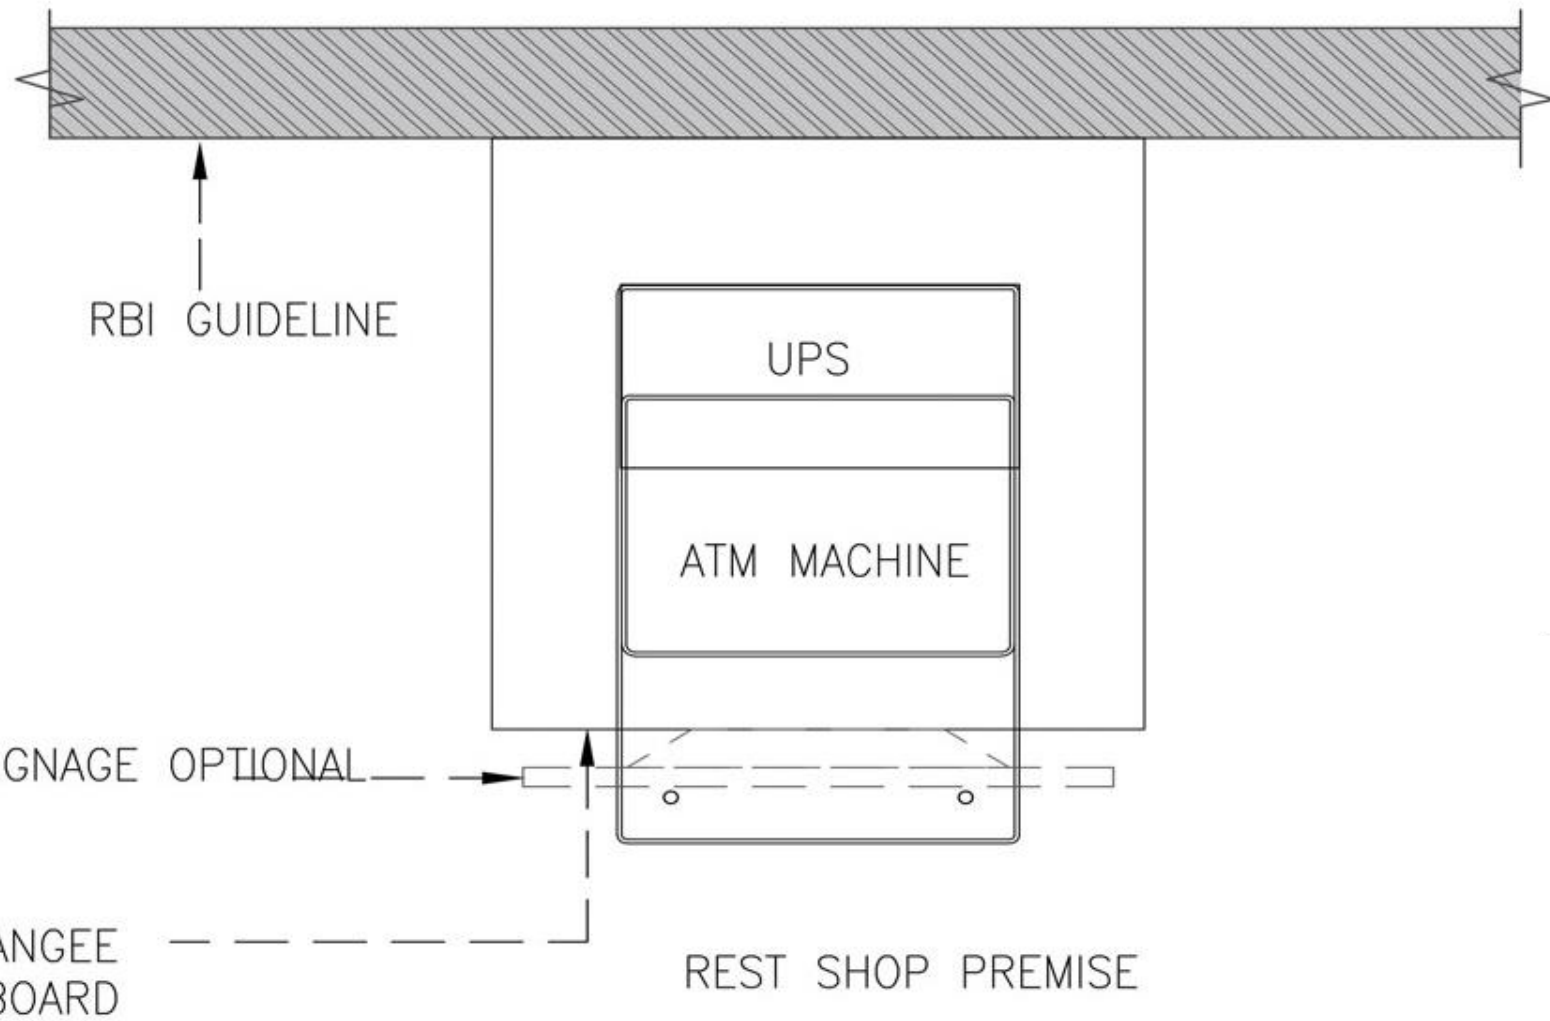


Drawings | ATM Cabin - Top View and Isometric view

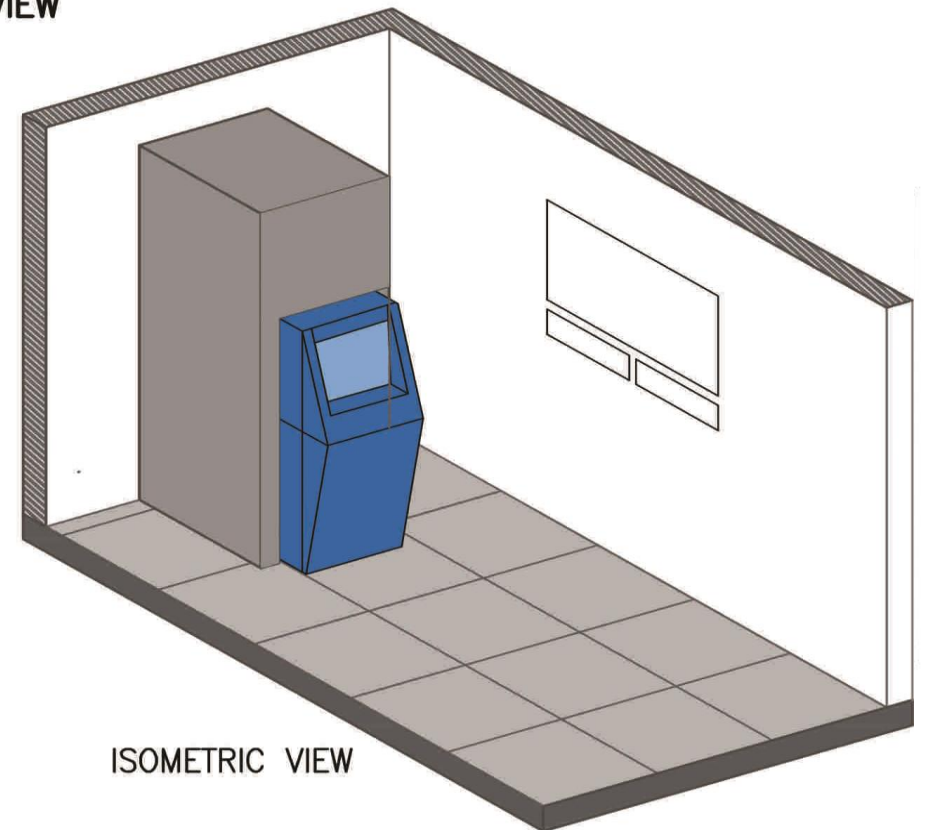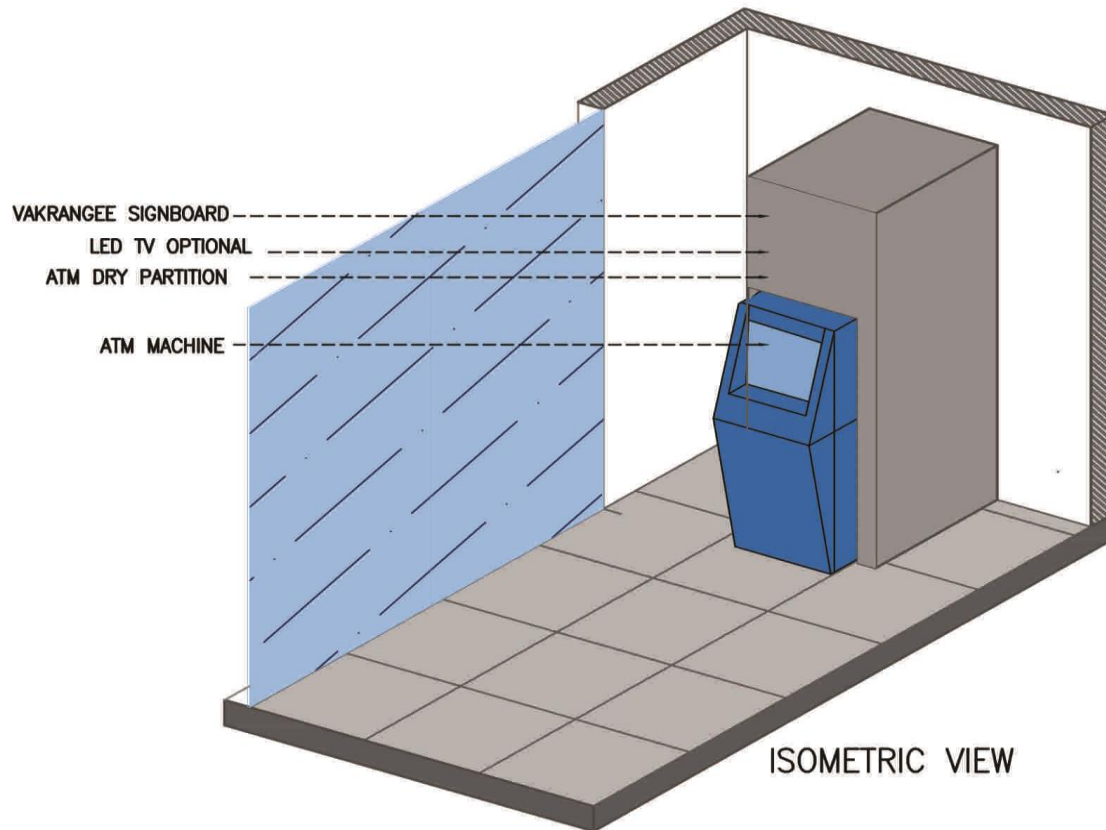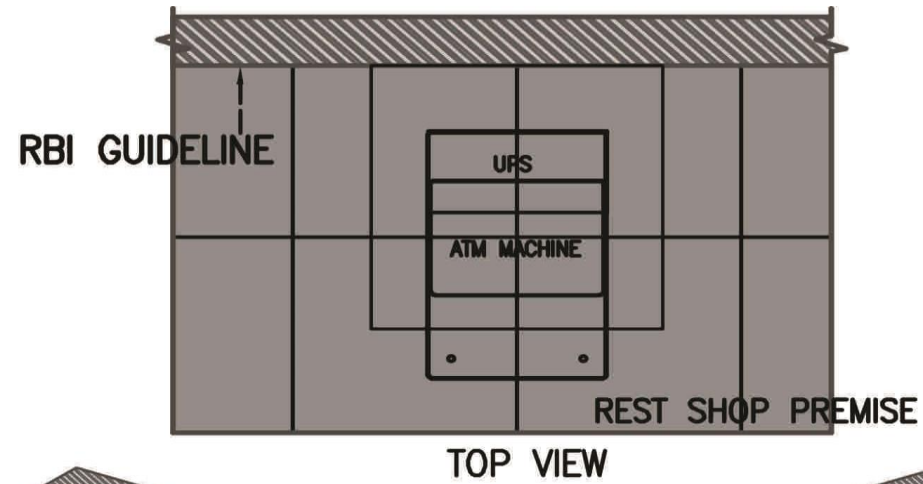

Drawings | ATM Cabin - Furniture and Finishing Details

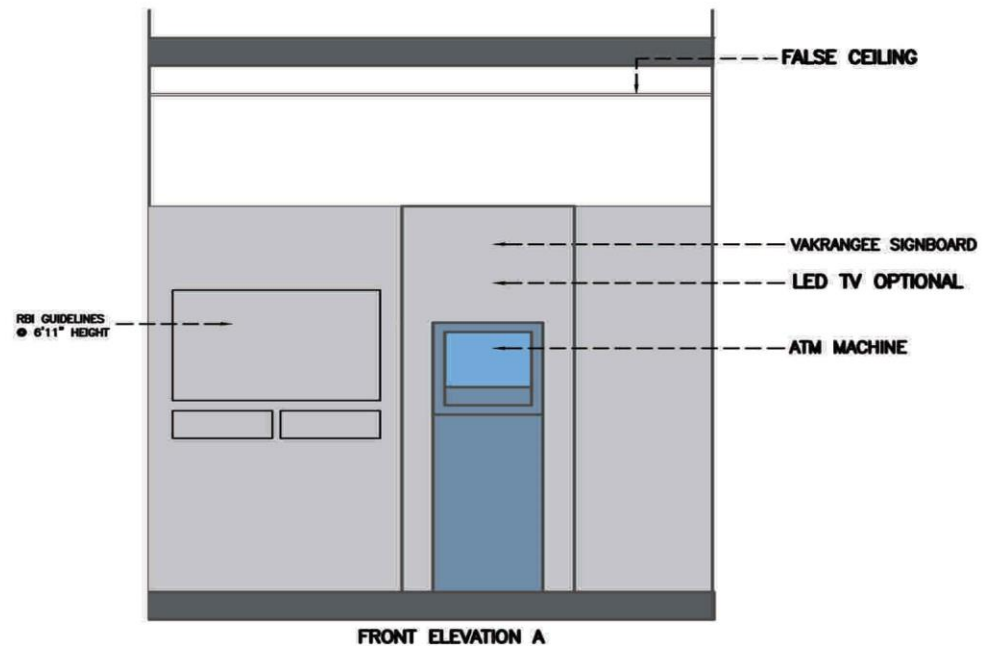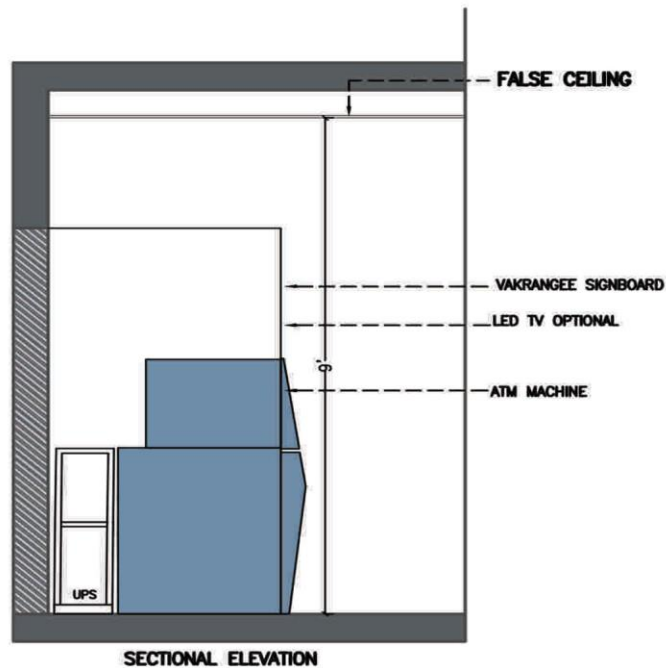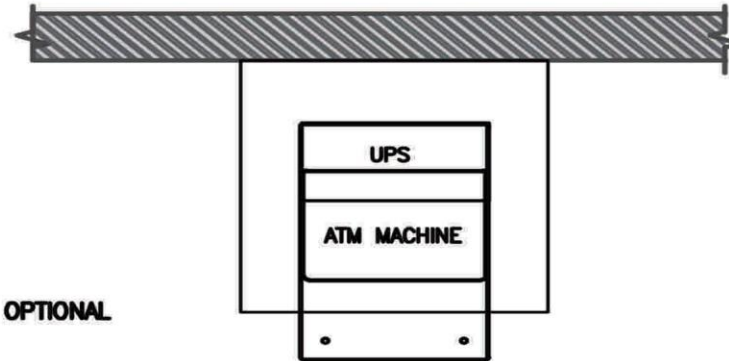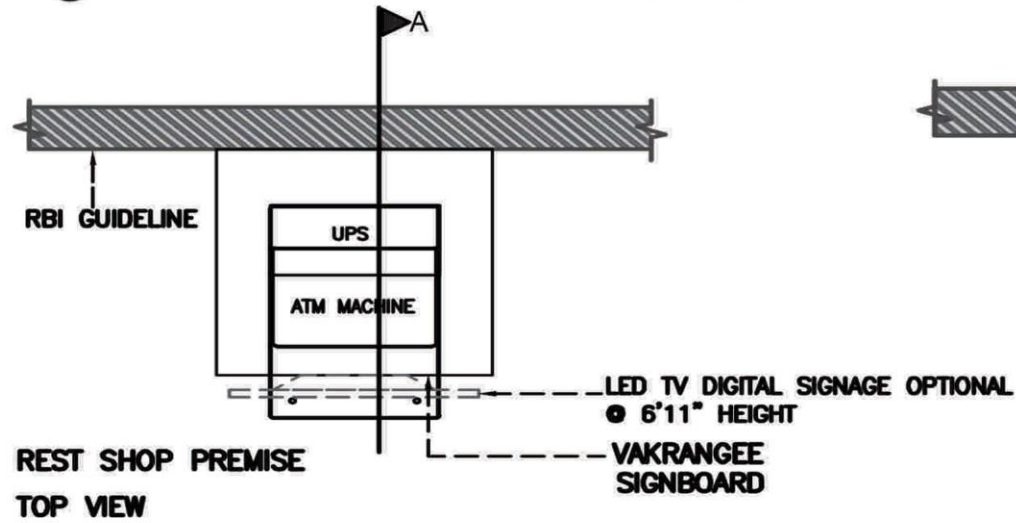

Drawings | ATM Cabin - Electrical Layout and CCTV Camera installation

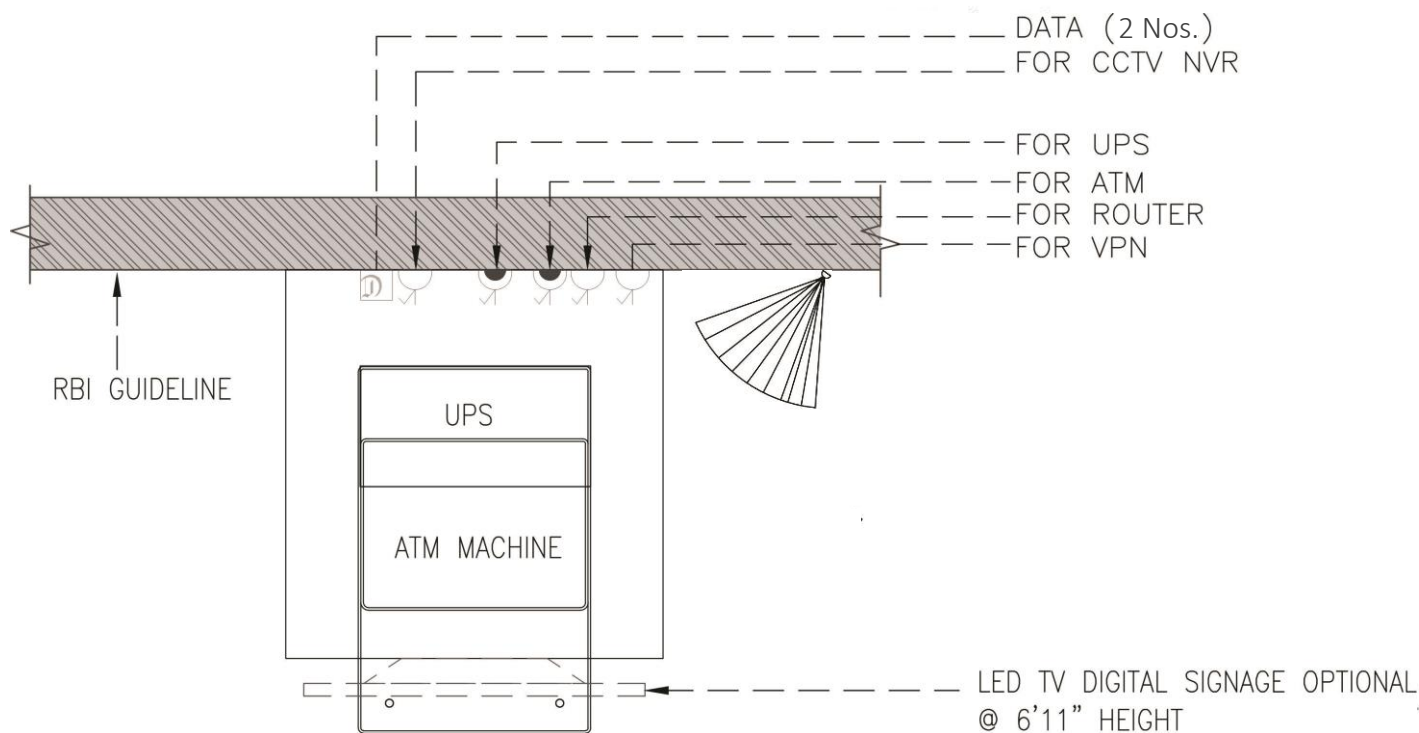

Please ensure Earthing Voltage - 0V to 3V.

NOTE -

- Option A - CCTV Camera location will be on ATM partition at 8 feet Height
- Option B - CCTV Camera location will be on ATM partition at 10 feet.
- Please ensure that cash counting process should be carried out in such a way that it is covered in the CCTV recording.

ATM EARTHING VIDEO LINK -


https://vkms.vakrangee.in/Downloads/D_?_=Earthing%20Video.zip

Only for Shop - in - Shop ATM

ELECTRICAL LEGEND:


	2/3 PIN 6A SWITCH SOCKET ON RAW POWER @ 4'0"
	3/3 PIN 6/16A SWITCH SOCKET ON UPS @ 4'0"
	DATA OUTLET (CAT 6)
	SWITCH @ 1200mm/4' FROM FFL-ANCHOR ROMA ROMA CLASSIC/ ANCHOR PENTA MODULAR WHITE PLATES
	2 kg ABC FIRE EXTINGUISHER AT 900mm/3' FROM FFL
	CCTV CAMERA @ CEILING HT LVL

Drawings | ATM Cabin - Signage Layout

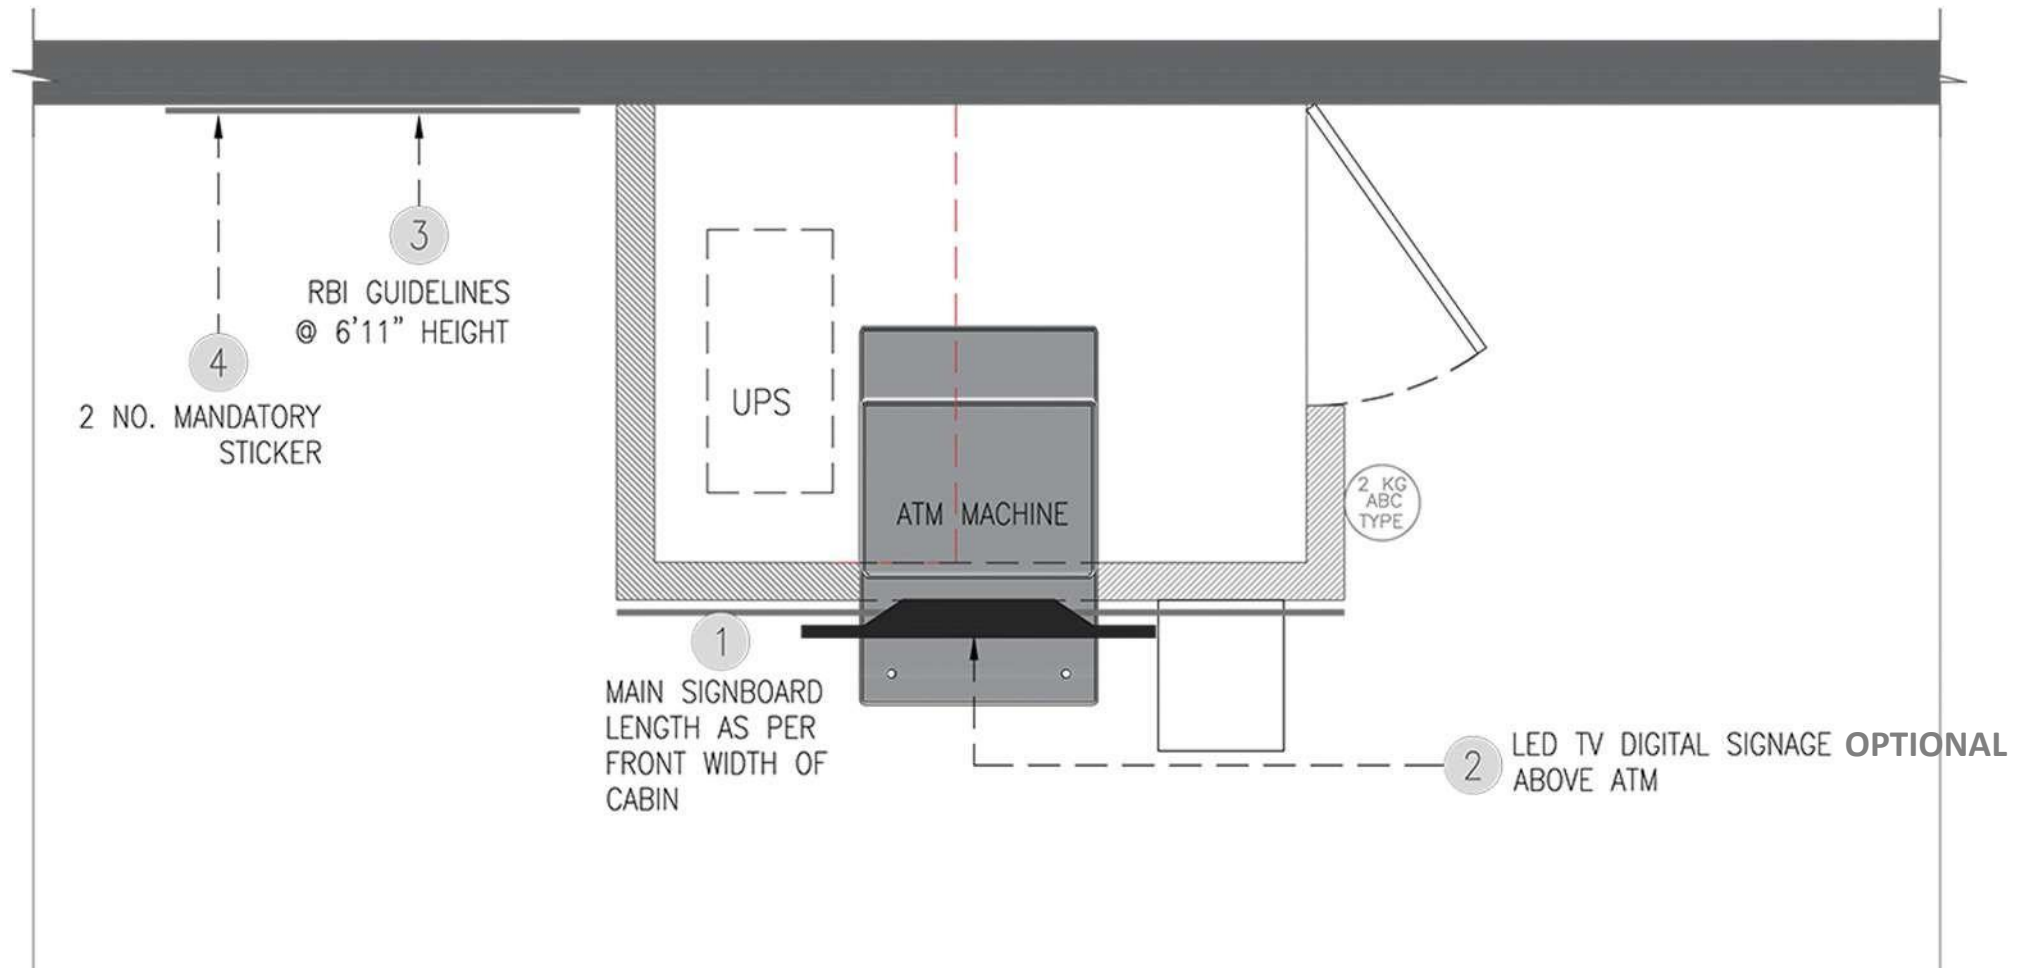

Covid - 19 Guidelines

06

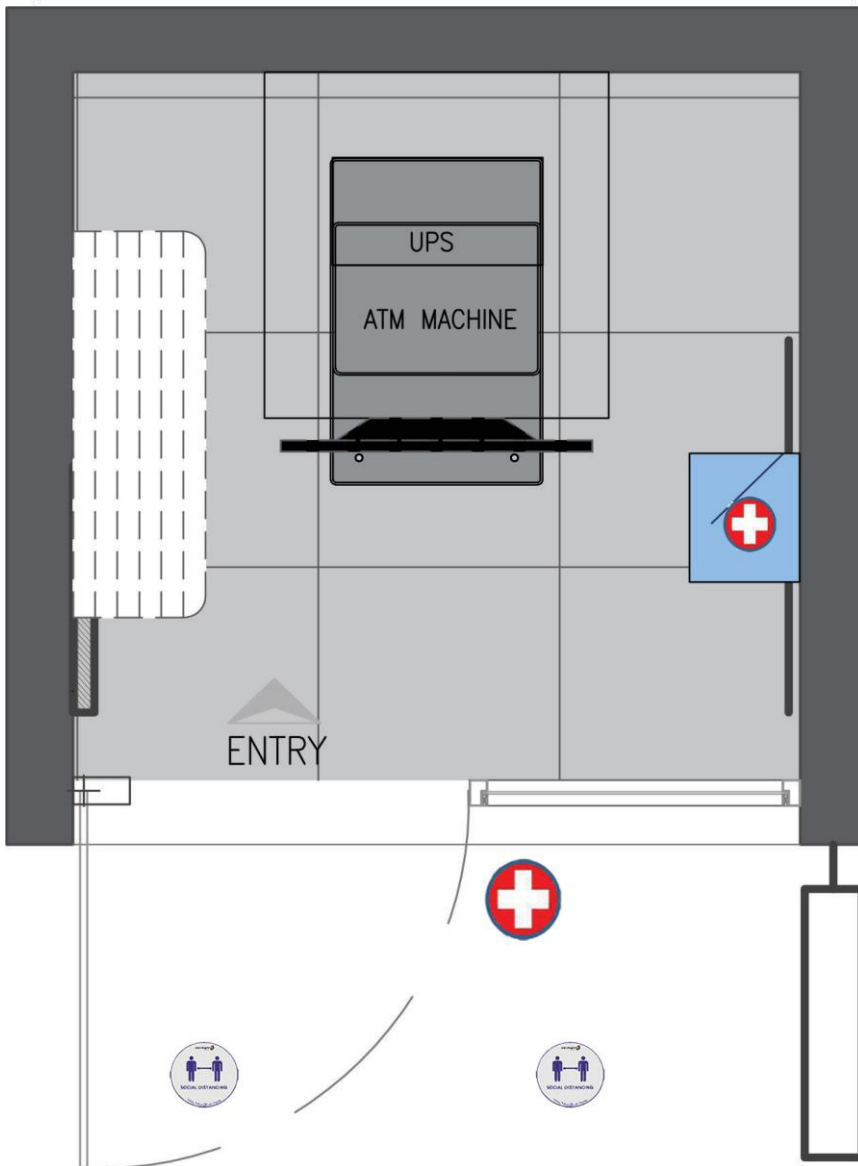

SANITIZING STATION

1. Outside of Entrance Door
2. Near ATM

Is hand sanitizer effective against COVID-19 ?

Ans. The best way to prevent the spread of infections and decrease the risk of getting sick is by washing your hands with plain soap and water, advises the

Ministry of Health and Family Welfare (MoHFW).

Washing hands Often with soap and water for at least 20 seconds is essential, especially after going to the bathroom; before eating; and after coughing, sneezing, or blowing one's nose. If soap and water are not available, **MoHFW** recommends consumers use an alcohol-based hand sanitizer that contains at least 70% alcohol



SOCIAL DISTANCING

- Please Keep minimum 6 Feet distance.
- Do not shake hands with anyone
- Avoid touching door handles.
- Always wear mask
- Observe discipline

Maintenance Guidelines - For Kendra Interior and Branding Elements.

Franchisees are advised to follow the Maintenance Guidelines for ensuring intended life of the elements and also to keep them in good order and conditions

1. Main Sign Board:

- 1-Once in a month Clean with Mild Soap water using soft cloth.
- 2- In case of Bird shit or any other issue clean immediately with mild soap and water.

2. Vinyl / Sunboard Posters:

- 1- Once in Fortnight clean with mild soap water using soft cloth. Do not use brush or coarse material.
- 2- If corners are lifted up or become loose then use feviquick or any instant adhesives to fix it immediately.

3. Floor Mat/Vitrified Tiles:

Weekly cleaning using mild soap water or as and when required.

4. Wall Paint:

Monthly cleaning with soft wet cloth in case of Distemper or Oil paint.

5. Door Glass

Clean Glass regularly using glass cleaning liquid.

6. LED lights:

Regular cleaning with soft wet cloth.

7. Door Mat:

Regular cleaning by dipping in 1% Sodium Hypochlorite.

Advisable:

- 1- Disinfect daily whole Kendra using approved disinfectants.
- 2- Do regular pest control of Kendra.

Vakrangee Limited

Vakrangee Corporate House, Plot No.93, Road No.16,
MIDC Marol, Andheri (East), Mumbai - 400 093.
Telephone No. +91 22 67765100
www.vakrangee.in

Thank You

| www.vakrangee.in |

Copyright : This document is copyright and its contents confidential. It cannot be reproduced and given to the third parties without the written consent of Vakrangee Ltd.